



**HAL**  
open science

# Min-sum decoding of irregular LDPC codes with adaptive scaling based on mutual information

Florence Alberge

► **To cite this version:**

Florence Alberge. Min-sum decoding of irregular LDPC codes with adaptive scaling based on mutual information. International Symposium on Turbo Codes and Iterative Information Processing (ISTC 2016), Sep 2016, Brest, France. hal-01849652

**HAL Id: hal-01849652**

**<https://centralesupelec.hal.science/hal-01849652>**

Submitted on 26 Jul 2018

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# Min-sum decoding of irregular LDPC codes with adaptive scaling based on mutual information

F. ALBERGE

L2S, Univ. Paris-Sud, CentraleSupélec, CNRS, Université Paris-Saclay, France

## ABSTRACT

An adaptive scaling strategy is proposed for counterbalancing LLR overestimation in Min-Sum decoding. The scaling factor is a function of a single variable that can be efficiently computed online.

## MIN-SUM DECODING

Irregular (N,K) LDPC code over an AWGN channel

### NOTATIONS

$R_i$ : LLR of bit  $i$  from the observations

$E_{ji}^{(k)}$ : LLR sent at iteration  $k$  from check node  $j$  to variable node  $i$

$M_{ji}^{(k)}$ : LLR sent at iteration  $k$  from variable node  $i$  to check node  $j$

### Standard min-sum decoding

#### • Horizontal step

$$E_{ji}^{(k)} = \prod_{i' \neq i} \text{sgn}(M_{ji'}^{(k-1)}) \min_{i' \neq i} |M_{ji'}^{(k-1)}| \quad (1)$$

#### • Vertical step

$$M_{ji}^{(k)} = R_i + \sum_{j' \neq j} E_{j'i}^{(k)} \quad (2)$$

### Scaled min-sum decoding

#### KNOWN FACTS FROM THE LITERATURE:

- Min-sum decoding leads to overestimated LLR [2].
- Fixed scaling factor is sufficient for regular LDPC but not for irregular LDPC [5].
- The scaling factor should depend on the check node degree [4, 3].

#### • Vertical step (new rule)

$$M_{ji}^{(k)} = R_i + \sum_{d \in \mathcal{D}(i)} \alpha^{(k)}(d) \sum_{j' \in \mathcal{M}(d)} E_{j'i}^{(k)} \quad (3)$$

where  $\mathcal{D}(i)$  is the set of degrees and  $\mathcal{M}(d)$  is the set of indexes of parity check eq. with degree  $d$ .

Optimal choice for the scaling factor  $\Rightarrow$  depends on the *reliability* of the LLR.

## SCALING FACTOR AND MUTUAL INFORMATION

### Mutual information between extrinsics

#### NOTATIONS

$L_y$  resp.  $L_z$  rv associated with  $\{\sum_j E_{j,i}\}$  resp.  $\{\sum_j M_{j,i}\}$

$X$ : rv associated with transmitted message

The mutual information  $I(L_y, L_z)$  is defined as:

$$I(L_y, L_z) = E_{p_{L_y, L_z}(\ell_y, \ell_z)} \left[ \log_2 \left( \frac{p_{L_y, L_z}(\ell_y, \ell_z)}{p_{L_y}(\ell_y) p_{L_z}(\ell_z)} \right) \right] \quad (4)$$

The mutual information between extrinsics is related to  $I(L_y, X)$  and  $I(L_z, X)$  through [1]:

$$I(L_y, L_z) = I(L_y, X) + I(L_z, X) - I(L_y + L_z, X) \quad (5)$$

and can be evaluated with **Exit Charts**.

EXAMPLE: Irregular code of rate  $\frac{1}{2}$  and length 10032 with degree distribution

$$\rho(x) = 0.25x^4 + 0.75x^{14} \quad (6)$$

$$\lambda(x) = 0.1917x + 0.0125x^2 + 0.0417x^4 + 0.0750x^5 + 0.2040x^6 + 0.0667x^7 + 0.225x^8 + 0.0833x^9 + 0.058x^{10} + 0.0541x^{12} \quad (7)$$

Two different check-node degrees: 5 and 15  $\Rightarrow$  two scaling factors  $\alpha(5)$  and  $\alpha(15)$

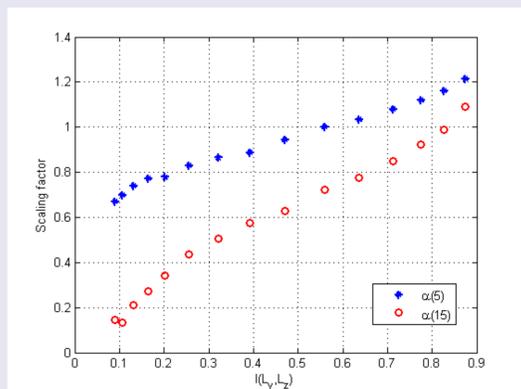


Figure 1: Scaling factors  $\alpha(5)$  and  $\alpha(15)$  vs  $I(L_y, L_z)$ .

Using polynomial fitting and with  $I = I(L_y, L_z)$ , we obtain the following rules:

$$\alpha(5) = 0.416 + 1.956I - 2.975I^2 + 1.832I^3 \quad (8)$$

$$\alpha(15) = -0.232 + 2.747I - 3.690I^2 + 2.268I^3 \quad (9)$$

## ONLINE COMPUTATION OF $I(L_y, L_z)$

Let  $\ell_{y,i}$  resp.  $\ell_{z,i}$  be a realization of random variable  $L_y$  resp.  $L_z$ . An estimator  $\tilde{I}_{yz}$  of  $I(L_y, L_z)$  is given in [1] with expression:

$$\tilde{I}_{yz} = 1 + \frac{1}{K} \sum_{k=1}^K \log_2 \left( \frac{1 + e^{\ell_{y,k} + \ell_{z,k}}}{(1 + e^{\ell_{y,k}})(1 + e^{\ell_{z,k}})} \right) \quad (10)$$

and can be implemented as

$$\tilde{I}_{yz} = 1 + \frac{1}{K \log(2)} \sum_{k=1}^K \left( f(\ell_{y,k} + \ell_{z,k}) - f(\ell_{y,k}) - f(\ell_{z,k}) \right) \quad (11)$$

with  $f(\ell) = \max(0, \ell) + \frac{\log(1 + e^{-|\ell|})}{g(\ell)}$  and pre-computed values from  $\mathcal{Q} = \{0, q, 2q, \dots, L_{max}\}$  are used for  $g(\ell)$ .

COMPLEXITY (extra cost compared to fixed scaling strategy)

- storage of pre-determined values of  $\alpha(5)$ ,  $\alpha(15)$  and  $g(\cdot)$

- arithmetical complexity due to the computation of  $\tilde{I}_{yz}$  at each iteration.

with LDPC in (6-7), extra cost is less than 8% for addition and less than 2% for min/max selection.

## NUMERICAL RESULTS

- CHANNEL: AWGN.

- CODE: Irregular LDPC code with rate  $1/2$ , length 10032 and degree distribution in (6)-(7).

- MODULATION: BPSK, 256-QAM.

### COMPARISON BETWEEN:

- SP: sum-product implementation

- MS,  $\alpha = 1$ : standard MS implementation with vertical step as in (2)

- MS,  $\alpha = f(IM)$ : the proposed method with vertical step as in (3) and with adaptive scaling factors in (8-9) and  $I = \tilde{I}_{yz}$ .

- MS,  $\alpha = f(EbN0_{threshold}, it)$ : MS implementation in [4] with scaling factor acquired using training LLR and with a value of  $EbN0$  corresponding to the practical threshold  $EbN0_{threshold}$  of the code.

- DNMS: MS implementation with fixed values of  $\alpha(5)$  and  $\alpha(15)$  (generalization of the normalized MS to irregular codes [2] with best scaling pair  $\alpha(5) = 0.88$  and  $\alpha(15) = 0.68$  [4]).

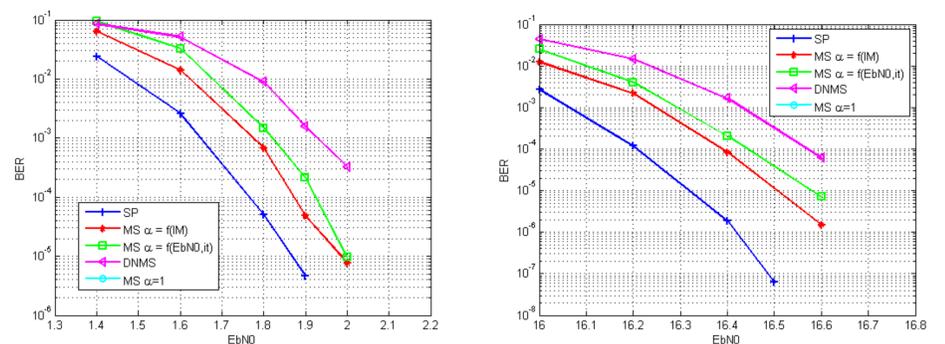


Figure 2: BER under BPSK AWGN channel (left) and 256-QAM AWGN channel (right)

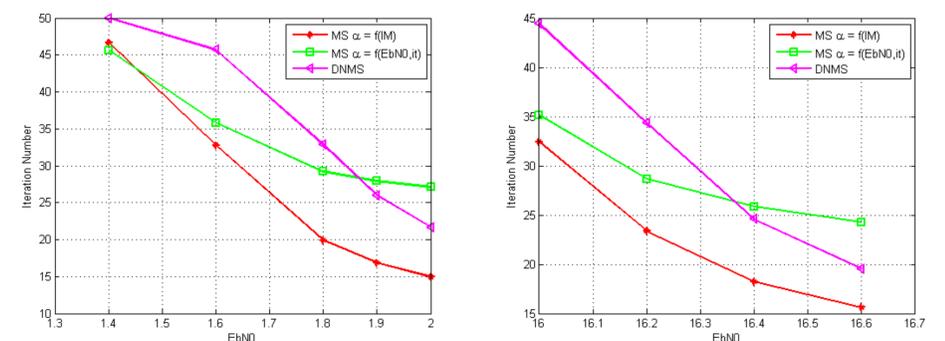


Figure 3: Iteration number under BPSK AWGN channel (left) and 256-QAM AWGN channel (right)

## References

- [1] F. Alberge. On Some Properties of the Mutual Information between Extrinsic with Application to Iterative Decoding. *IEEE Trans. on Commun.*, 63(5):1541–1553, May 2015.
- [2] J. Chen and M.P.C. Fossorier. Density evolution for two improved BP-Based decoding algorithms of LDPC codes. *IEEE Communications Letters*, 6(5):208–210, May 2002.
- [3] G. Lechner and J. Sayir. Improved Sum-Min Decoding for Irregular LDPC Codes. In *6th International ITG-Conference on Source and Channel Coding (TURBOCODING)*, pages 1–6, April 2006.
- [4] Y. Xu, L. Szczecinski, B. Rong, F. Labeau, D. He, Y. Wu, and W. Zhang. Variable LLR Scaling in Min-Sum Decoding for Irregular LDPC Codes. *IEEE Trans. on Broadcasting*, 60(4):606–613, Dec 2014.
- [5] J. Zhang, M. Fossorier, D. Gu, and J. Zhang. Two-dimensional correction for min-sum decoding of irregular LDPC codes. *IEEE Communications Letters*, 10(3):180–182, Mar 2006.