



HAL
open science

Electrical characterization of MEMS gyroscopes with fast frequency sweeps

Jérôme Juillard, Margot Morlans, Zalfa Jouni, Jorge Ayala-Cuevas, Laurent Bourgois, Erwan Libessart, Jean Guérard, Raphaël Levy, Alexis Brenes, Elie Lefeuvre

► **To cite this version:**

Jérôme Juillard, Margot Morlans, Zalfa Jouni, Jorge Ayala-Cuevas, Laurent Bourgois, et al.. Electrical characterization of MEMS gyroscopes with fast frequency sweeps. Eurosensors 2022, Sep 2022, Leuven (Belgique), Belgium. hal-04196025

HAL Id: hal-04196025

<https://centralesupelec.hal.science/hal-04196025v1>

Submitted on 5 Sep 2023

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Electrical characterization of MEMS gyroscopes with fast frequency sweeps

J. Juillard¹, M. Morlans^{1,2}, Z. Jouni¹, J. Ayala¹, L. Bourgois¹, E. Libessart¹

J. Guérard², R. Lévy², A. Brenes³, E. Lefeuvre³

¹GeePs, UMR8507, CNRS, CentraleSupélec, Université Paris-Saclay, Sorbonne Université

²DPHY, ONERA, ³C2N, UMR9001, CNRS, Université Paris-Saclay



ONERA

THE FRENCH AEROSPACE LAB



This work has benefited from the financial support of the LabEx **LaSIPS** (ANR-10-LABX-0032-LaSIPS) managed by the French National Research Agency under the "Investissements d'avenir" program (ANR-11-IDEX-0003)

High- Q , low- f_0 resonator parameter estimation

- Obtaining the steady-state response (e.g. Nyquist diagram) from a high- Q , low- f_0 resonator requires extremely long acquisitions
 - unpractical
 - cost of adequate environmental control
- Ringdown response (linear/nonlinear) is the fastest estimation approach
 - some parameters are not identified (e.g. transduction efficiency)
 - relies on analytical expression of free resonator response
 - embedded/integrated implementation is difficult (in nonlinear case)

Proposed approach (1-DOF resonator with polynomial nonlinearity)

- Excite resonator with

$$v_{exc}(t) = V_{exc}(t) \sin \int \omega(t) dt$$

- Determine parameters $\theta = (g, C_0, \dots, C_n)$ in resonator model

$$F(t, \dot{X}(t), X(t), \theta) \equiv 2j\omega(t)\dot{X} + \left(C_0 + \sum_{i=1}^n C_i |X|^{2i} - \omega(t)^2 \right) X - gV_{exc}(t) = 0$$

with slowly-varying $V_{exc}(t)$ and $\omega(t)$

- Measure (complex) resonator output $X(t)$
- Estimate $\dot{X}(t)$, e.g.


$$\hat{\dot{X}}(t_k) = \frac{X(t_{k+1}) - X(t_{k-1})}{t_{k+1} - t_{k-1}}$$

$$\hat{\theta} = \arg \min \sum_{k=2}^{N-1} |F(t_k, \hat{\dot{X}}(t_k), X(t_k), \theta)|^2$$

- Linear LS solution for all $V_{exc}(t)$ and $\omega(t)$, even in nonlinear resonator case!
- Extension to more DOFs is straightforward

Experimental setup and method


- ONERA's VIG gyroscope
 - 2-DOF resonator
 - Drive mode characteristics : $f_0 \approx 5888.2$ Hz, $Q \approx 3.6 \times 10^5$, $\Delta f = f_0/2Q \approx 8.2$ mHz, $\tau \approx 19.5$ s
 - Sense-drive frequency mismatch ≈ 111 Hz
 - Near to no feedthrough, but mechanical coupling (quadrature error) is present

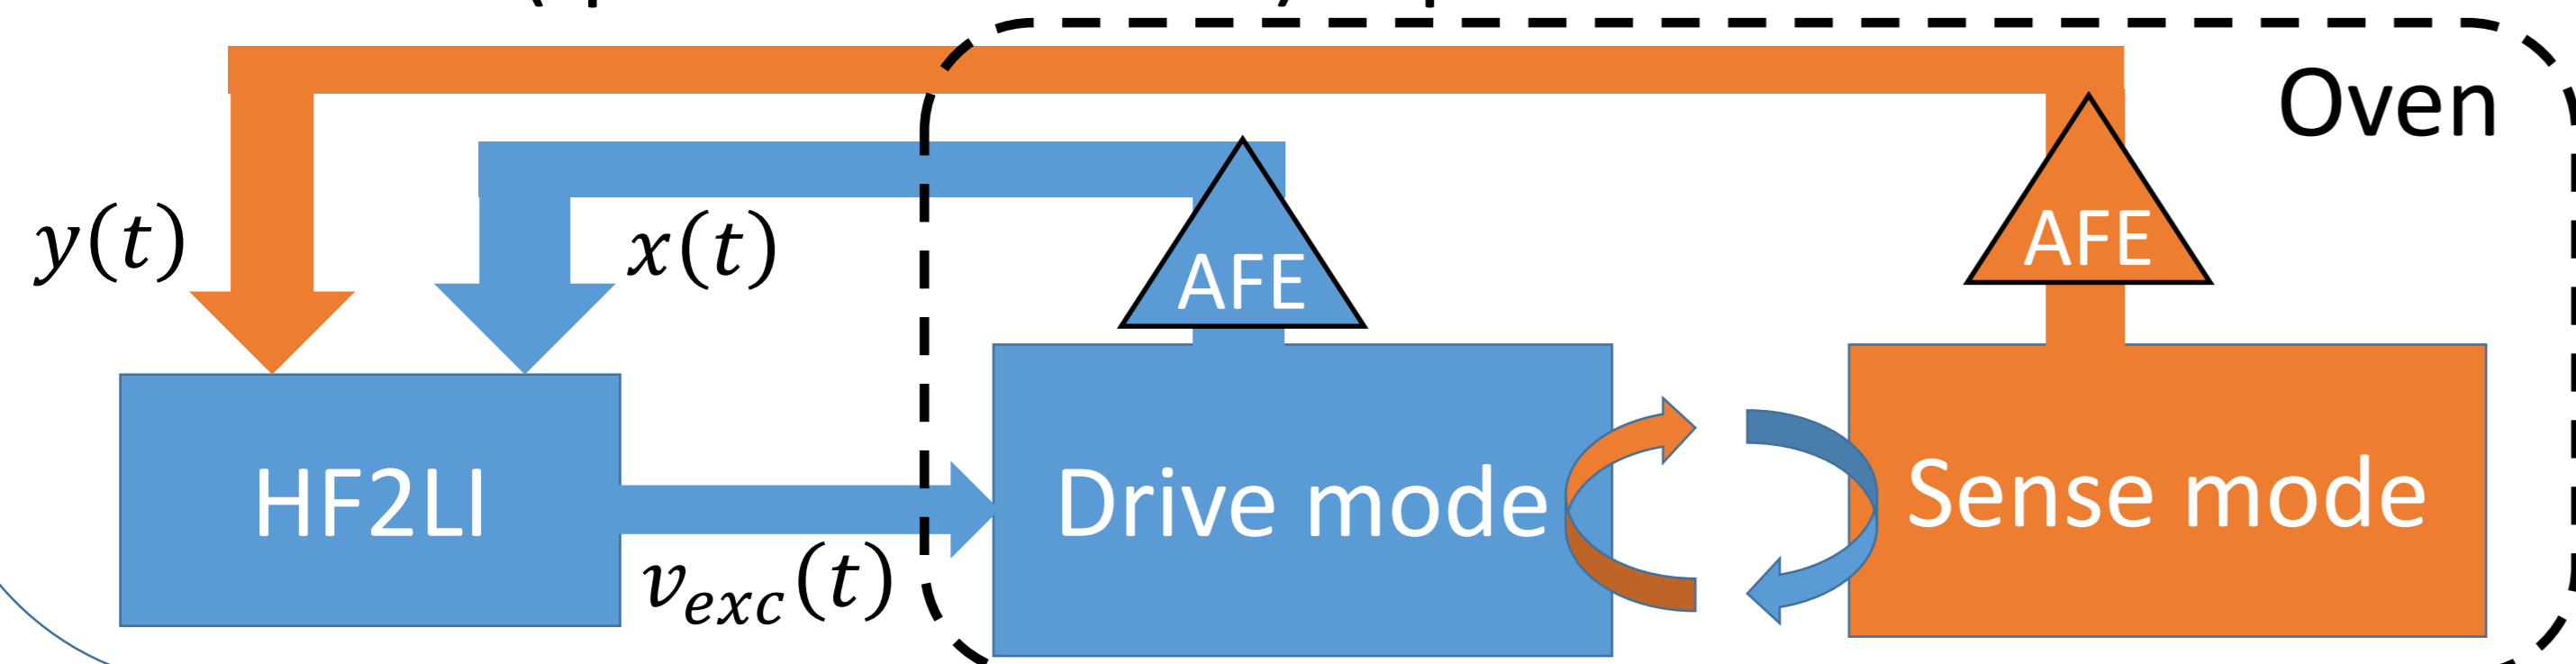

- Resonator is placed inside ± 0.1 °C regulated oven
- Drive mode is harmonically excited with lock-in amplifier, both drive (X) and sense (Y) modes are detected
 - « Fast » linear frequency sweeps around f_0
 - Sweep bandwidth $K \times \Delta f$, $K = 48, 24, 12, 6, 3$
 - Sweep duration $L \times \tau$, $L = 1, 2, 3, 6, 12, 24, 48, 96$
 - 2 sweeps performed for each $\{K, L\}$
- estimate drive mode parameters with proposed approach
- estimate coupling coefficient R_{cpl} from

$$(\hat{R}_{cpl}, \hat{R}_{FT}) = \arg \min \sum_{k=1}^N |Y(t_k) - R_{cpl}X(t_k) - R_{FT}V_{exc}|^2$$

Raw data, extracted parameters and uncertainty assessment

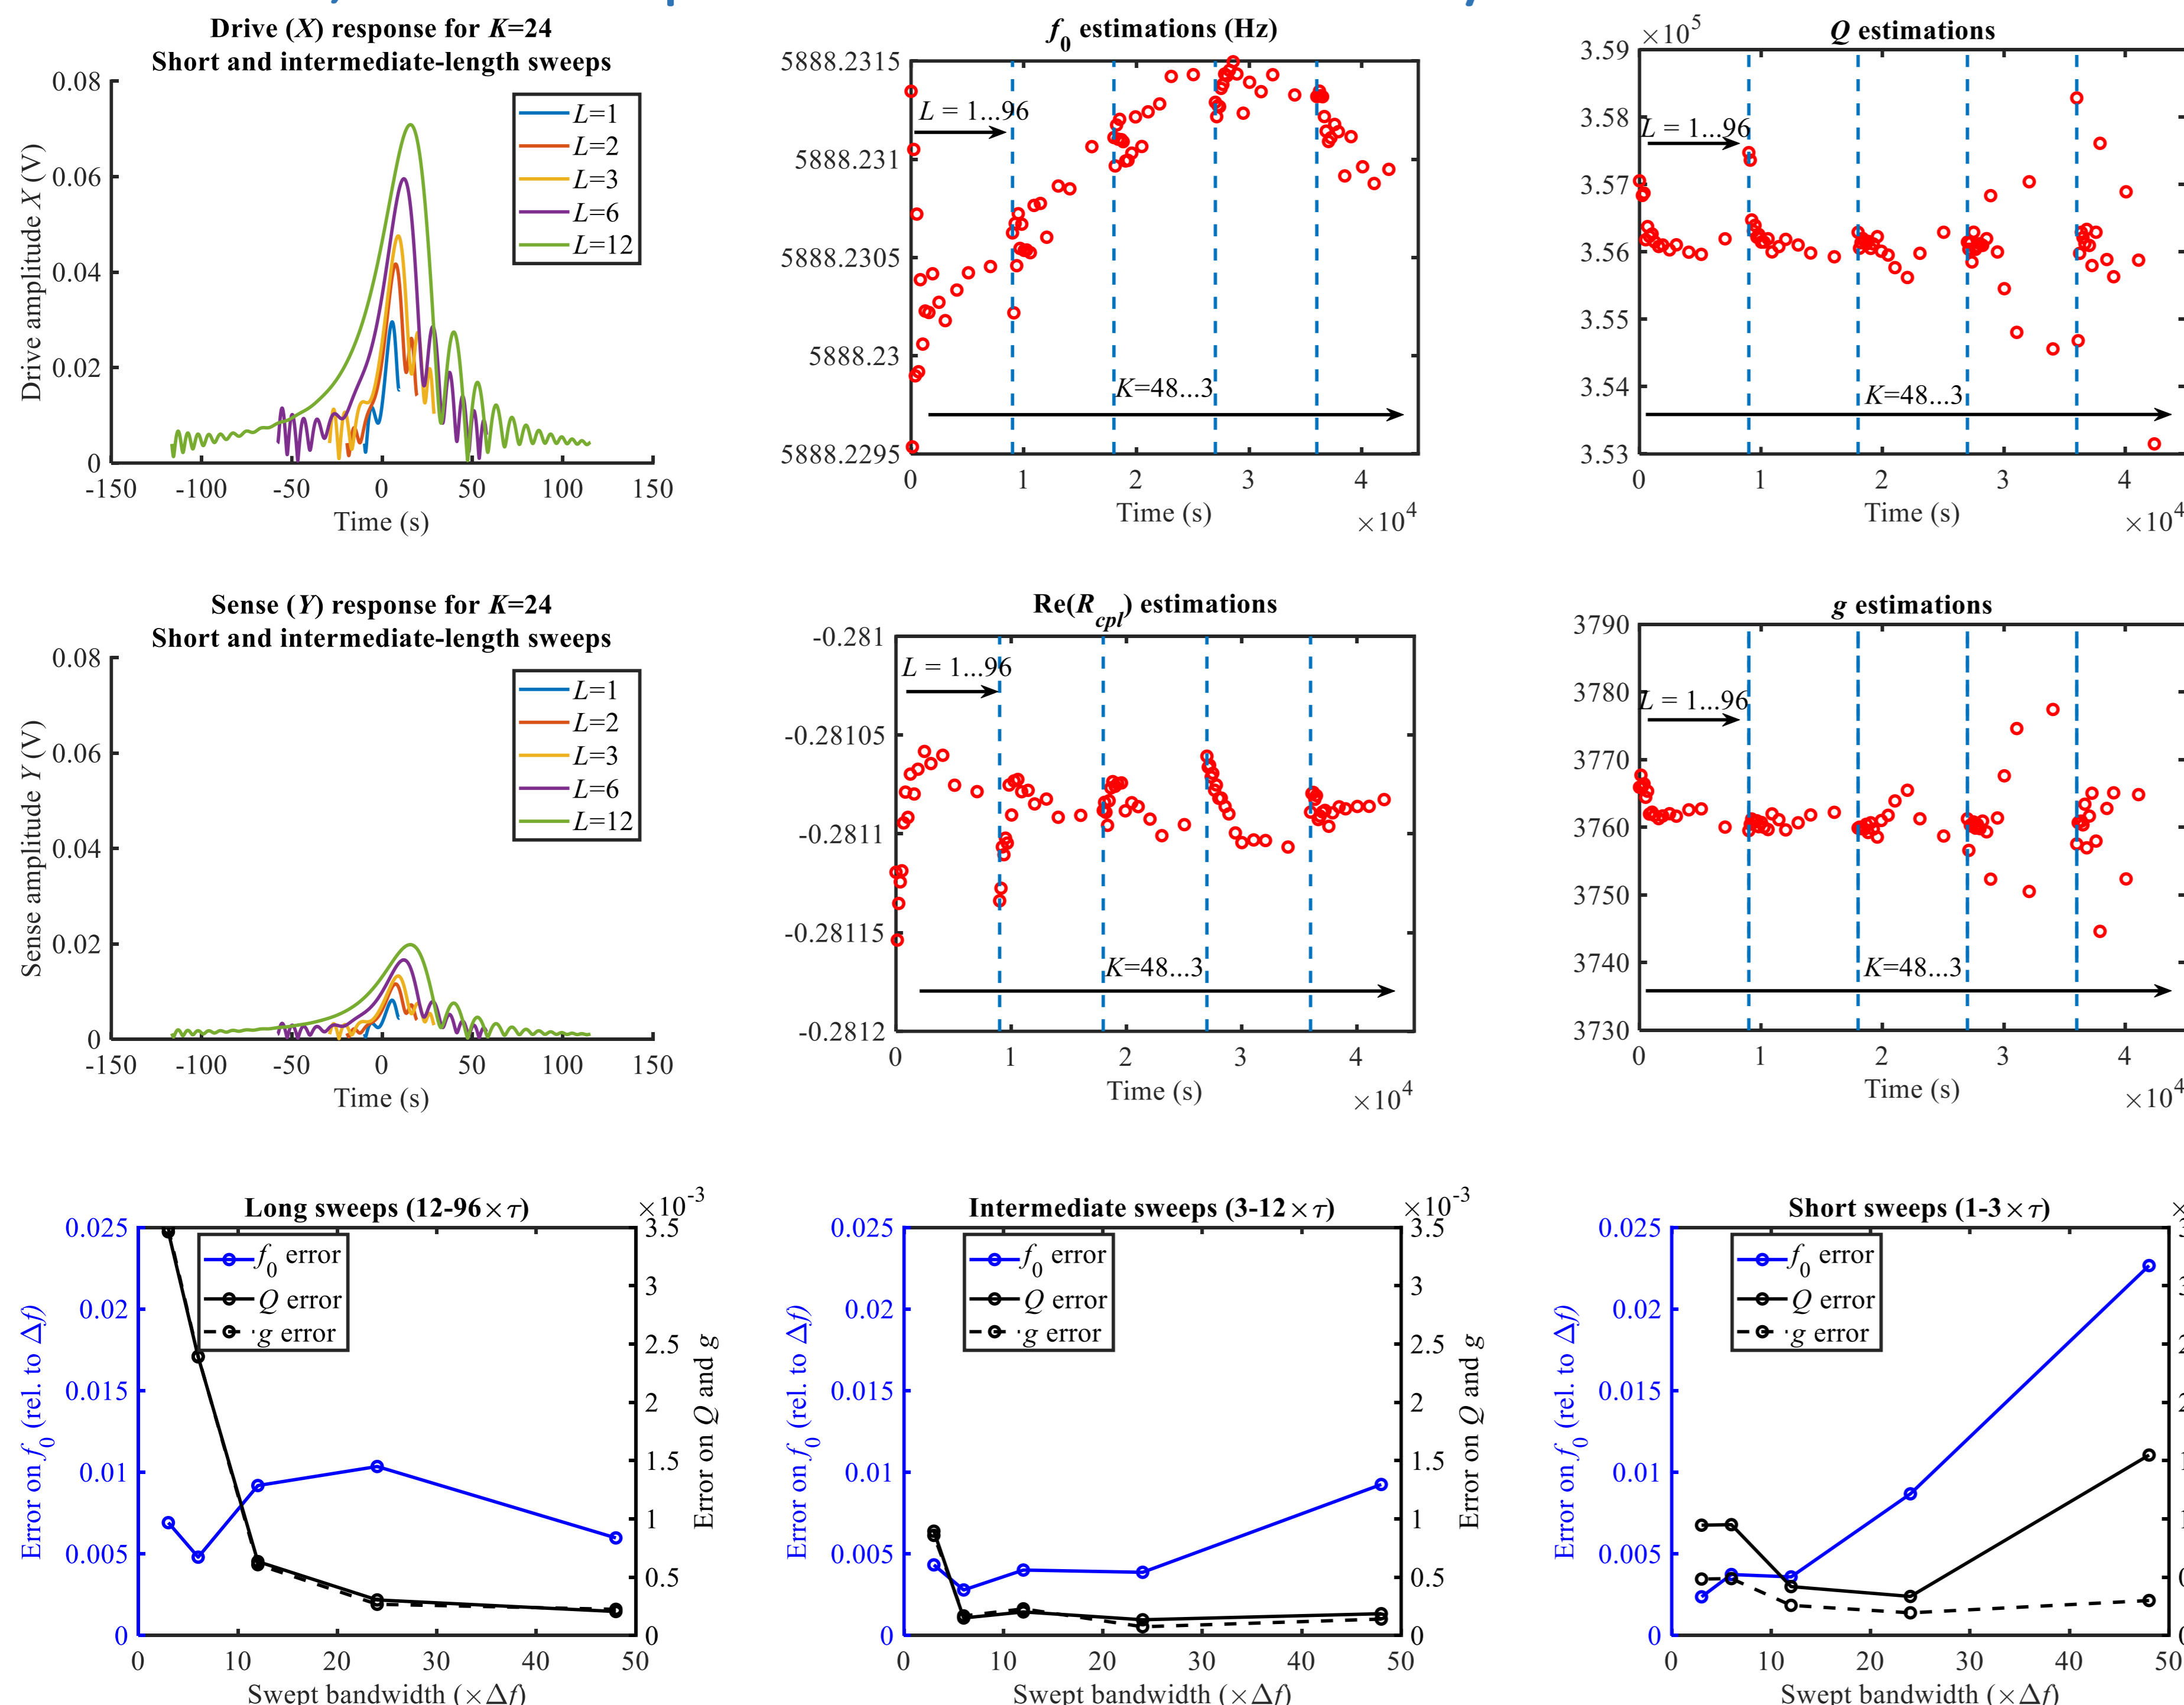

- Visible drift in f_0 over time (follows temperature regulation)
- Overall excellent estimation of resonator parameters (better than 0.1% for Q and g , than 1% for f_0 w.r.t. Δf)
 - For small bandwidths / long durations, Q and g estimations have « large » variance, with strong correlation
 - For large bandwidths / small durations, errors result from finite difference approximation and from reduced SNR
- 1st coefficient of nonlinearity (C_1) is close to zero

Conclusion

Experimental validation of a transient parameter estimation approach

- nearly as fast as ringdown
- model- and response-agnostic
- yielding all resonator parameters
- small computational and integration complexity
- moderate hardware requirements