



**HAL**  
open science

## **3D HF RFID reader antenna for tag detection in different angular orientations**

Megdouda Benamara, Marjorie Grzeskowiak, Miyassa Salhi, Gaelle Bazin  
Lissorgues, Antoine Diet, Yann Le Bihan

► **To cite this version:**

Megdouda Benamara, Marjorie Grzeskowiak, Miyassa Salhi, Gaelle Bazin Lissorgues, Antoine Diet, et al.. 3D HF RFID reader antenna for tag detection in different angular orientations. 2016 Loughborough Antennas & Propagation Conference (LAPC), Nov 2016, Loughborough, United Kingdom. pp.1-4, 10.1109/LAPC.2016.7807512 . hal-01691609

**HAL Id: hal-01691609**

**<https://centralesupelec.hal.science/hal-01691609v1>**

Submitted on 31 Jul 2019

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



## Open Archive Toulouse Archive Ouverte (OATAO)

OATAO is an open access repository that collects the work of some Toulouse researchers and makes it freely available over the web where possible.

This is an author's version published in: <https://oatao.univ-toulouse.fr/24080>

**Official URL** : <https://doi.org/10.1109/LAPC.2016.7807512>

### To cite this version :

Benamara, Megdouda and Grzeskowiak, Marjorie and Salhi, Miyassa and Lissorgues, Gaëlle and Diet, Antoine and Le Bihan, Yann 3D HF RFID reader antenna for tag detection in different angular orientations. (2016) In: 2016 Loughborough Antennas & Propagation Conference (LAPC), 14 November 2016 - 15 November 2018 (Loughborough, United Kingdom).

Any correspondence concerning this service should be sent to the repository administrator:

[tech-oatao@listes-diff.inp-toulouse.fr](mailto:tech-oatao@listes-diff.inp-toulouse.fr)

# 3D HF RFID Reader Antenna for Tag Detection in different angular orientations

M. BENAMARA ,M. GRZESKOWIAK, M.SALHI, G. LISSORGUES

ESYCOM EA 2552 (UPEMLV, ESIEE-Paris, CNAM)  
Cite Descartes, F. 77454 Marne-la-Vallée, France  
benamara@univ-mlv.fr

A. DIET, Y. LE BIHAN

GEEPS (PIEM) UMR 8507, Univ. Paris Saclay  
F. 91192 Gif sur Yvette, France

**Abstract**—Herein, a 3D 13, 56 MHz (HF) RFID reader antenna is proposed in order to optimize detection performance whatever the tag angular positioning. The design is made of a multi-loop structure, based on serial complementary antennas, as said “twisted” antennas. The RFID tag detection is optimized by two factors which rely on the modifications of the magnetic field (i) vectorial distribution and (ii) magnitude density. The reader antenna design is analyzed with electromagnetic simulation under HFSS (High Frequency Electromagnetic Field Simulation), and validated by detection measurements, in coplanar mode. A multi-loop structure, composed by 4 sub-loops, is then conformed onto a tube surface to provide the 3D structure. The goal of this improvement is to provide tag detection for any angular positions. At the center of the tube (3D reader structure), the detection of the tag is performed whatever its angular orientation, that is to say for any radial orientation.

**Keywords**—HF RFHD; magnetic coupling; reader antenna; detection, 3D antenna

## I. INTRODUCTION

HF RFID (High Frequency Radio Frequency Identification) systems are used in several applications for tracking and logistics. An inductively coupled RFID HF system is based on the magnetic coupling between the reader and the tag loops [1]. The main drawback of such RFID technology is the difficulty in providing a sufficient magnetic coupling for different scenarios of tag orientation and positions. This is all the more difficult than the tag size is small compared to the reader loop antenna. Herein, we focus on the case of small tags falling into a tube of detection, as can be used for any small tagged object in logistic applications. The challenge of the proposed system is to improve range and tag detection in function of its position and especially orientation. To optimize the generated magnetic field distribution, and consequently the ability of magnetic coupling with small tags for any orientation, the reader antenna must have large size and a complex structure made of complementary sub-loops [2]. A current challenge in HF RFID is to increase the surface and the volume of detection by changing the shape of the reader antenna [3][4][5][6]. In the state-of-the-art

bibliography, several reader antennas are proposed in coplanar or 3D model and the range and the surface of detection are often maximized in parallel configuration [5][7][8]. However, all other angular orientations of the tags, especially for a perpendicular configuration, reach their limit of detection close to the antenna loop.

In this study, an improvement of tag detection ability is obtained by using complementary loops conformed onto the tube external surface. The sub-loops of the proposed design allow to reduce the difference in size between the tag and the reader loops, and consequently to increase the magnitude of the mutual coupling values. Additionally, these complementary sub-loops modify the distribution of the magnetic field above their common edges. The design is validated by HFSS electromagnetic simulations and measurements of detection in parallel and perpendicular configuration. The same design is used to realize the 3D structure. The use of complementary loops consequently creates a peak of equivalent mutual inductance, which is fruitful in the 3D structure for a randomly orientated tag.

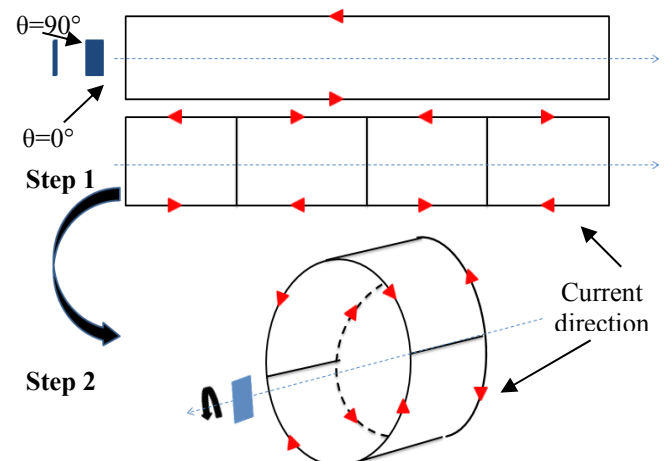


Fig.1 Proposed design antenna in coplanar (step 1) and 3D model (step 2)

## II. STEP 1: COPLANAR DESIGN

The proposed structure in Fig.1 has four sub-loops of (10x17cm<sup>2</sup>). The tag coil corresponds to 7% of the surface of the conventional antenna (10\*68cm<sup>2</sup>), while in the proposed design the tag coil corresponds to 26.6% of each sub-loop size.

The use of sub-loops fed with opposite phase current creates the reorientation of the magnetic field lines at the common zones between each two juxtaposed sub-loops (Fig. 2a,2b). Also the magnitude field is also improved with the multi-loop antenna compared to the conventional antenna (Fig. 2c,2d).

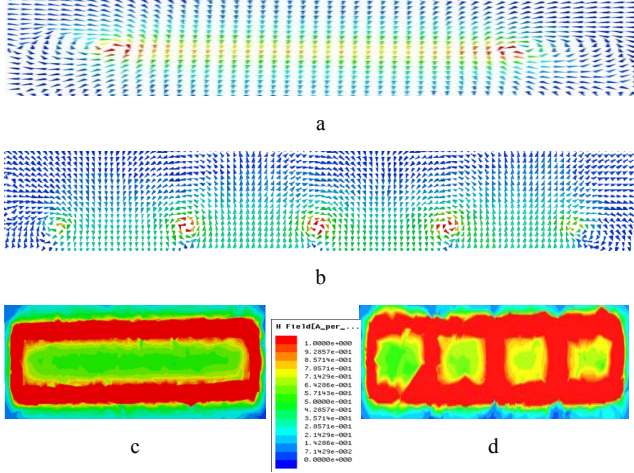


Fig. 2. Lines and magnitude of the magnetic field for conventional reader antenna (a, c) and the proposed multi-loop antenna (b, d)

### A. Theoretical study

HF RFID detection is based on load modulation. The performances are depending on the distance and positioning (lateral and angular) between the tag and the reader. In this study the evaluation of the performance is based on mutual inductance value in function of the position.

In conventional configuration, the mutual inductance is calculated by the Neumann formula as:

$$M = \frac{\mu_0}{4\pi} \left[ \oint_{\Gamma_R} \oint_{\Gamma_T} \frac{d\vec{l}_R \cdot d\vec{l}_T}{d} \right] \quad (1)$$

Where,  $\Gamma_R$  and  $\Gamma_T$  are the two circulations fed respectively by the currents  $I_R$  and  $I_T$ .  $d$  is the distance between each elementary displacement. In the case of a multi-loops antenna design, the mutual inductance is the sum of the mutual inductances between the tag and each one of the sub-loops  $R_1$ ,  $R_2$ ,  $R_3$ : and  $R_4$

$$M = \frac{\mu_0}{4\pi} \left[ \oint_{\Gamma_{R_1}} \oint_{\Gamma_T} \frac{d\vec{l}_{R_1} \cdot d\vec{l}_T}{d} + \oint_{\Gamma_{R_2}} \oint_{\Gamma_T} \frac{d\vec{l}_{R_2} \cdot d\vec{l}_T}{d} + \oint_{\Gamma_{R_3}} \oint_{\Gamma_T} \frac{d\vec{l}_{R_3} \cdot d\vec{l}_T}{d} + \oint_{\Gamma_{R_4}} \oint_{\Gamma_T} \frac{d\vec{l}_{R_4} \cdot d\vec{l}_T}{d} \right] \quad (2)$$

$$= M_{R_1T} + M_{R_2T} + M_{R_3T} + M_{R_4T}$$

### B. Simulations and measurements

The coplanar design is validated by (i) HFSS simulations of the mutual inductance, and (ii) RFID detection tests using commercial reader module, in parallel and perpendicular configuration. The two reader structures are realized with 6 mm width copper ribbon.

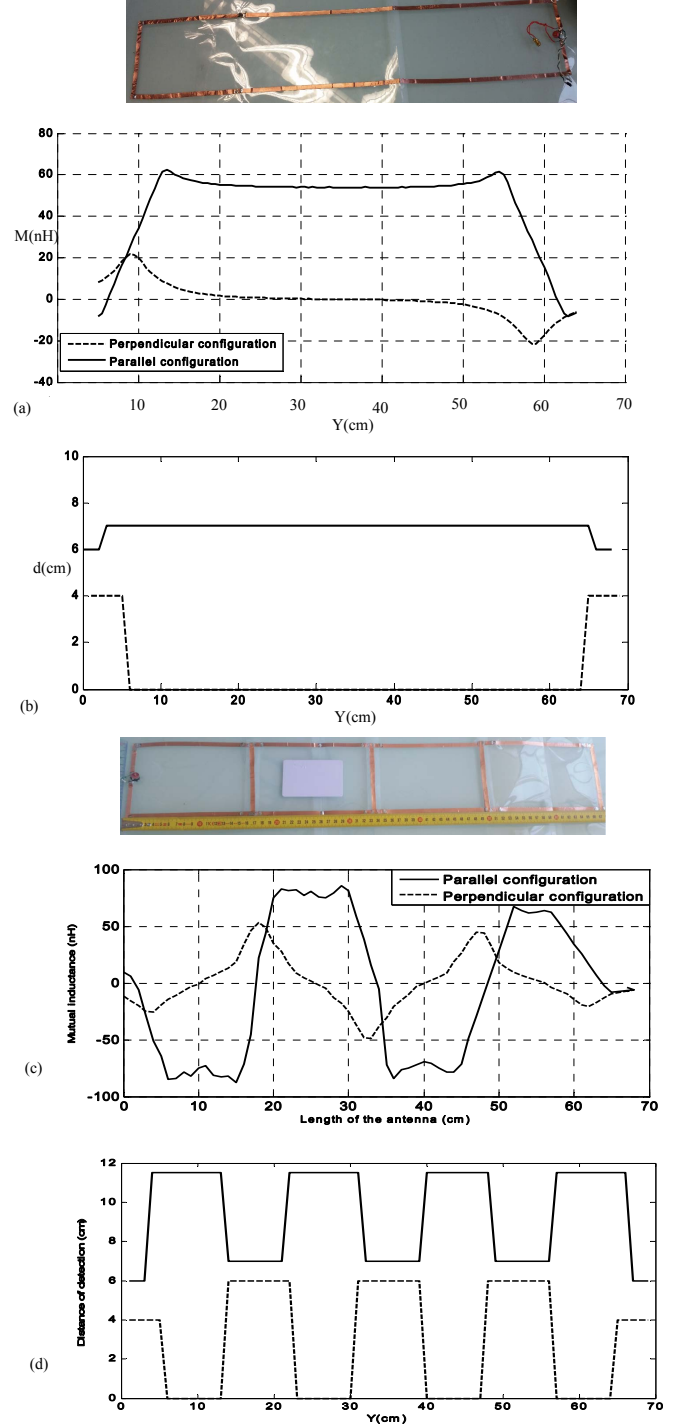


Fig. 3. Mutual inductance (a, c) and distance of detection (b, d) for conventional and multi-loop antenna in parallel and perpendicular configuration

The inductances and quality factors are respectively 0.93 uH and 28 for the conventional loop, 1.44 uH and 31 for the multi-loop antenna. The tag is a commercial card corresponding to a simulated rectangular coil of 8x5cm with an inductance of 21.5 nH.

The mutual inductance and detection range are evaluated in function of the tag positioning. In conventional antenna the maximum values of mutual inductance is seen at its edges. While at the surface of the conventional antenna, the mutual inductance has fixed values: 55 nH in parallel configuration and zero in perpendicular configuration. The tag detection is then performed at a distance of 4 cm above the surface of the reader antenna in parallel configuration, while in perpendicular configuration the tag is detected only above the edges of the antenna from a distance of 2.5 cm.

The mutual inductance is improved by the proposed design in both parallel and perpendicular configuration. The maximum values are seen above the common zones between the juxtaposed sub-loops, herein, the range detection is maximized up to 11.5 cm in parallel configuration and 6 cm in perpendicular configuration.

The perpendicular configuration is not optimized using the coplanar structure because the tag is not detected above the surface of the sub-coils. To overcome this drawback, we proposed then, to use the 3D model antenna in step 2.

### III. STEP 2:3D STRUCTURE

#### A. Magnetic field

Previously, the concept of multi-loops antenna has been validated. In this part, the multi-loop antenna is conformed onto a tube external surface to provide a 3D structure. Each juxtaposed sub-loop is fed with opposite phase current.

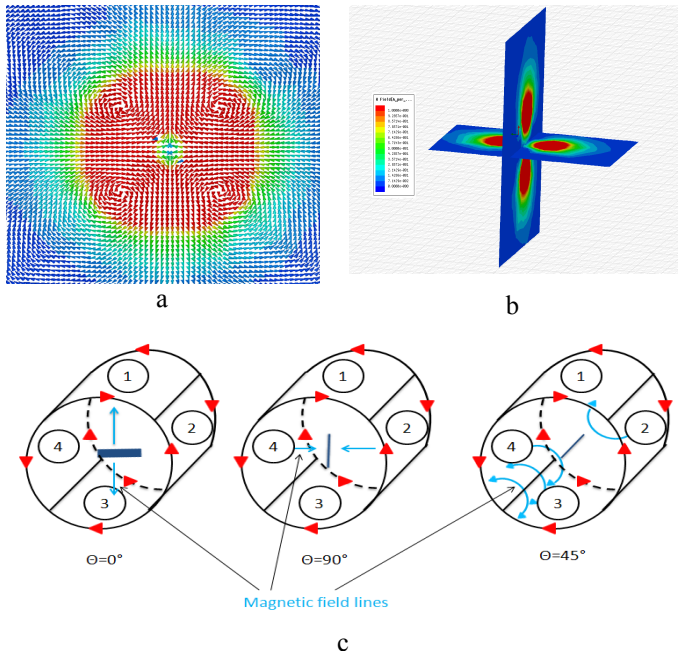


Fig.4. Lines (a) and magnitude (b) of the magnetic field and angular orientation of the tag inside the tube (c)

At the common zones, the magnetic field lines have a distribution in which the field line follows a circle, as seen in Fig. 4.a. The generated magnetic field distribution by the sub-loop “in face to face visibility” is directed outside the tube (i. e. loop 1 and 3), and towards the center of the tube (loops 2 and 4 in Fig4c). The structure permits the maximization of the magnitude of the magnetic field inside the tube but its center the magnetic field has minimum values (Fig 4.b). The tag is fixed at the center of the tube. In Fig. 4c, different angular tag orientations are reported ( $0^\circ < \theta < 360^\circ$ ).

-For  $\theta=0^\circ$ : the tag is parallel to the sub loops 1 and 3 and perpendicular to the sub-loops 2 and 4.

-For  $\theta=90^\circ$ : the tag is parallel to the sub loops 2 and 4 and perpendicular to the sub-loops 1 and 3.

-For  $\theta=45^\circ$ : the tag is parallel to the common zones between sub-loops 1 and 4 and sub-loops 2 and 3, also the tag is perpendicular to the other common zones between sub-loops 1 and 2 and 3 and 4.

The mutual inductance between each sub-loop and the tag is reported in Fig. 5. According to the angular misalignment, the mutual inductance has maximum values when the tag is parallel to each one of the sub-coils and zero values the tag is perpendicular to the surface of the sub-loop.

-Sub-loops 1 and 3 are optimized for  $\theta=0^\circ, 180^\circ$  and  $360^\circ$  (maximum values of mutual inductance: 10nH), however when  $\theta=90^\circ, 270^\circ$  the mutual inductance has zero values.

-Sub-loops 2 and 4 are optimized for  $\theta=90^\circ$  and  $\theta= 270^\circ$  (maximum values of mutual inductance: 10nH) , however when  $\theta=0^\circ, 180^\circ$  and  $360^\circ$ , the mutual inductance has zero values.

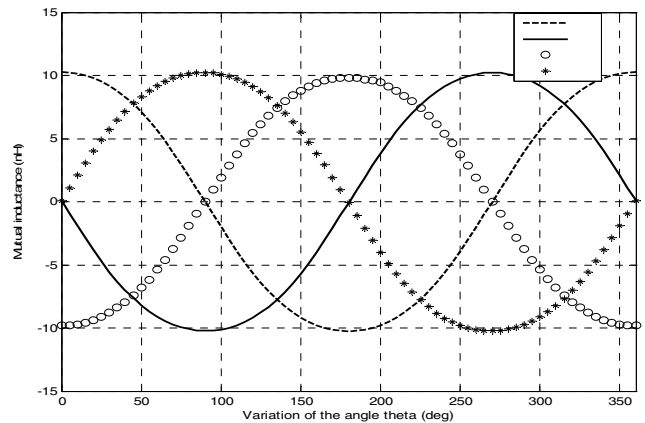


Fig.5 Mutual inductance between the tag and the different sub-loops according to the angular tag orientation

Inside the tube (Fig.6), the mutual inductance corresponds to the sum of absolute values of the mutual inductances between each sub loop and the tag coil. The mutual inductance has minimum values of 20 nH and maximum values of 30.5 nH:

-For  $\theta=0^\circ, 90^\circ, 180^\circ, 270^\circ$  and  $360^\circ$ : the mutual inductance corresponds to the sum of the mutual inductances between the visible sub-loops. When the tag is perpendicular

to two sub loops, the two other sub loops are parallel to the tag surface, then, the 3D structure eliminate theoretically all possible zero mutual inductance.

-For  $\theta=45^\circ, 135^\circ, 225^\circ$  and  $315^\circ$ : the mutual inductance has maximum values of 30.5 nH. It corresponds to the sum of the mutual inductances between visible common zones

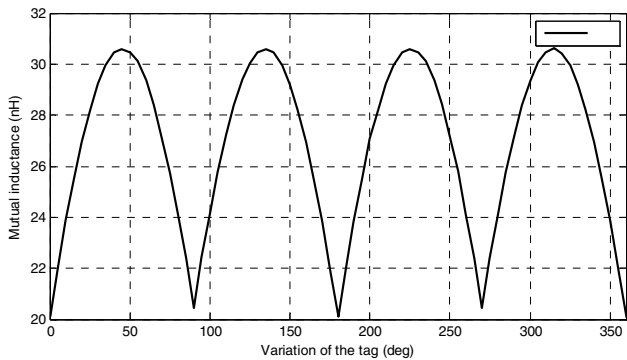


Fig.6. Mutual inductance between the tag and the 3D antenna according to the angular tag orientation

The mutual inductance is then optimized with the 3D structure for all angular misalignment of the tag.

#### IV. EXPERIMENTAL VALIDATION

The 3D design is realized with a tube of 20 cm diameter. The tag is positioned at the center of the tube at a distance of 10 cm from the structure. The tests of detection are done inside and outside of the tube.

-Compared to the coplanar design, where only parallel configuration ensures tag detection above the reader antenna and where all the other angular configurations present null zones detection, this proposed design permits tag detection, inside the tube, in all possible angular orientations of the tag ( $0^\circ < \theta < 360^\circ$ ) (Fig. 7a). It can be fruitfully used in practical for tracking applications like as animals or objects.

Outside the tube, the maximal distance of detection is respectively 25 cm when the tag is parallel to the tube (Fig. 7b) and 19.5 cm when the tag is perpendicular to the edges of the tube (Fig. 7c). The distance of detection is then improved up to 14 cm (from 11 cm to 25 cm) in parallel configuration and 13.5 cm in perpendicular configuration (from 6 cm to 19.5 cm). Inside the tube, the detection is also performed in different configuration, more precisely in parallel configuration the tag is detected at the concave surface of the tube, the design can then be used for maximizing range detection.

#### V. CONCLUSION

In this paper a new 3D HF RFID reader antenna is reported. The design is based on multi-loops antenna loaded by opposite phase currents (complementary principle). The coplanar design improved tag detection but especially for parallel

configuration.. The proposed 3D design antenna which is a coplanar design conformed onto a tube surface, allow tag detection in any angular orientation of the tag inside the tube.

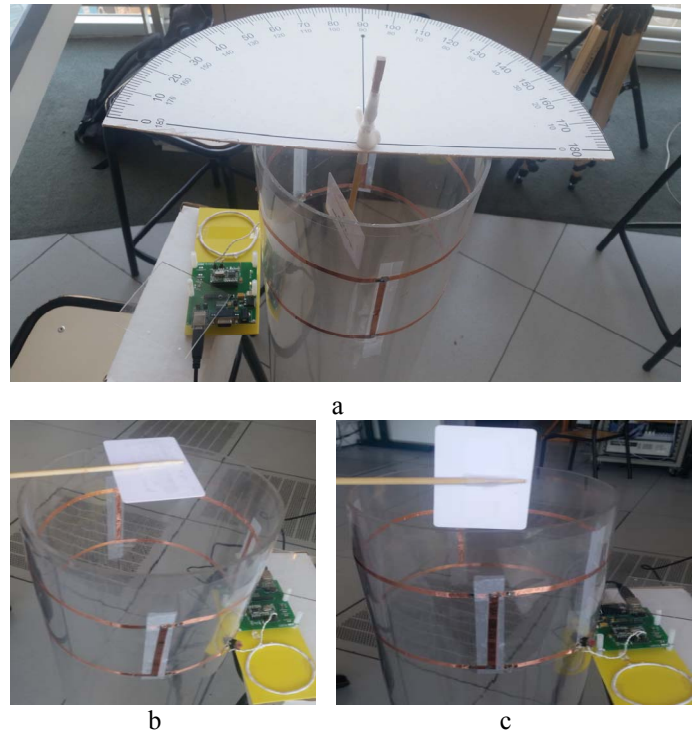


Fig.7. Realized 3D design with the tag inside the tube (a), parallel to the tube (b) and perpendicular to the edges of the tube (c)

#### REFERENCES

- [1] [2] K. Finkenzeller. RFID handbook, fundamentals and applications in contactless cards and identifications. 2nd ed., Wiley and Sons, 2003.
- [2] M. Benamara, M. Grzeskowiak, A.Diet, G. Lissorgues, Y.L. Bihan, "A twisted loop antenna to enhance HF RFID detection areas for different tag positioning," Eucap 2016, Davos
- [3] M. y. Ahmed and A.S. Mohan, "Multi-loop\_Bridge Antenna for improved positioning using HF RFID", Asia-Pacific Microwave Conference, 2011
- [4] H.Hirayama, Y. Satake, N.Kikuma, K.Sakakibara, "Improvement of Null Zone Avoidance Capability for HF-band RFID using Diversity Combining of Loop Antennas," in Eucap 2009, Berlin, 1963, pp. 1594 - 1597.
- [5] S.-y.Gong and G.j.Xie, "Three Overlapping Loop Antennas for 3D RFID,13.56MHz Access Control Gate",International Journal of Computer Theory and Engineering, Vol. 4, No. 3, June 2012.
- [6] W.Liu and M.M.Wong, "3D RFID Simulation and Design - Factory Automation," J. Name Stand. Abbrev., in press.
- [7] M. Grzeskowiak et al. Pebbles Tracking Thanks to RFID LF Multi-loops Inductively Coupled Reader. Progress In Electromagnetics Research, PIER C, ISSN: 1937-8718, N°55, pp. 129-137, 2014.
- [8] A. Diet et al. 'Improving LF Reader Antenna volume of detection for RFID token tag thanks to Identical Coaxial Loops (ICLs) and in/out-of phase multiple-loops structures' IEEE Int. Conference on RFID-Technology and Applications, 2014 September 8-9, Tampere, Finland.