



Systematic development of upwind numerical fluxes for the space discontinuous Galerkin method applied to elastic wave propagation in anisotropic and heterogeneous media with physical interfaces

B. Tie, A.-S. Mouronval

► To cite this version:

B. Tie, A.-S. Mouronval. Systematic development of upwind numerical fluxes for the space discontinuous Galerkin method applied to elastic wave propagation in anisotropic and heterogeneous media with physical interfaces. *Computer Methods in Applied Mechanics and Engineering*, 2020, 372, pp.113352. 10.1016/j.cma.2020.113352 . hal-02957458

HAL Id: hal-02957458

<https://centralesupelec.hal.science/hal-02957458>

Submitted on 9 Dec 2020

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Systematic development of upwind numerical fluxes for the space discontinuous Galerkin method applied to elastic wave propagation in anisotropic and heterogeneous media with physical interfaces

B. Tie^{a,*}, A.-S. Mouronval^a

^a*Université Paris-Saclay, CentraleSupélec, CNRS, Laboratoire de Mécanique des Sols, Structures et Matériaux (MSSMat-UMR8579), 91190, Gif-sur-Yvette, France.*

Abstract

This research work presents, within a unified and wave oriented variational framework, systematic development of upwind numerical fluxes for the space discontinuous Galerkin methods to model elastic wave propagation in multi-dimensional anisotropic media with discontinuous material properties. Both first-order velocity-stress and velocity-strain wave formulations are considered. The proposed approach allows the derivation of upwind numerical fluxes in a well structured and hierarchical way according to the degree of inhomogeneity across a physical interface. The numerical fluxes that are exact solutions of a relevant Riemann problem defined at a physical interface are obtained. The developed explicit and intrinsic tensorial expressions of upwind numerical fluxes in multidimensional case allow a better understanding and analysis of the physical meaning of involved terms. As numerical applications, an example with a physical interface separating two materials, one anisotropic and the other isotropic, and an example of polycrystalline material that presents a particular case with a larger number of physical interfaces, are considered. The proposed numerical fluxes are numerically investigated and validated.

Keywords: Space discontinuous Galerkin method; Elastic wave propagation, Anisotropy; Heterogeneous medium with physical interfaces; Polycrystalline materials

1. Introduction

2 The space discontinuous Galerkin (dG) method is based on the use of spa-
3 tially element-wise discontinuous finite element basis functions, and developing
4 appropriate numerical fluxes on element interfaces is a key point for its success

*Corresponding author

Email address: bing.tie@centralesupelec.fr (B. Tie)

[1, 2, 3, 4, 5, 6, 7, 8, 9, 10]. For this purpose, exact solving of the Riemann problem defined on element interfaces is usually recommended. However, when it is applied to elastic media, upwind numerical fluxes solving exactly the Riemann problem can be easily done only in the case of continuous material properties due to the involvement of the fourth order elastic tensor. Recently, research work has been proposed for the derivation of numerical fluxes at physical interfaces, i.e., in the presence of material discontinuities, in 2D [7] or in 3D [6, 9, 10] cases. All these works consider only the velocity-strain wave formulation for the elastic media, and they are all placed in the multiphysics context coupling respectively, isotropic elastic/acoustic media for Wilcox *et al.* [6], isotropic poroelastic/elastic media for Ward *et al.* [7], anisotropic elastic media/fluid media for Zhan *et al.* [9], or anisotropic poroelastic/elastic/fluid interfaces for Zhan *et al.* [10].

Besides, it is noteworthy that penalty fluxes, an alternative to upwind fluxes for dG methods, have also been developed in the literature [11, 12, 13, 14]. To derive numerical fluxes, the penalty method is energy stable and significantly less complicated. The lack of dependence of penalty fluxes on the stiffness matrix allows for a unified and efficient implementation [13]. However, by solving a Riemann problem consistent with physical continuous interface conditions, an upwind flux can be derived, and it is superior, *i.e.*, more accurate, to penalty fluxes. Moreover, such an upwind flux is completely determined by the physical problem itself, and there is no need to deal with the choice of a “numerical” parameter as the penalty parameter for a penalty flux.

The aim of the present work is, by using the unified and wave oriented variational framework that we previously proposed in [8], to present a systematic development of upwind numerical fluxes in the most general case of multidimensional anisotropic elastic media with discontinuous material properties. Unlike the above-cited works, both first-order velocity-stress formulation defined in [2, 3, 5] and velocity-strain one defined in [6, 7, 9] of the elastic wave propagation are considered, and in both cases, closed-form expressions of exact solutions of a Riemann problem defined at a physical interface are obtained. Owing to compact and intrinsic forms expressed in terms of tensors, the derivation of upwind numerical fluxes can be done in a well structured and hierarchical way, which allows better understanding and analysis of the physical meaning of the developed upwind numerical fluxes.

We note that, for the first-order velocity-strain formulation of elastic waves, the numerical flux derived in the present work is the same as the one presented in the above-cited works [7, 9]. Our contribution is a new method to derive the upwind flux, using a coordinate-free vector and tensor notation, and exploiting the elastic wave oriented eigenanalysis of a hyperbolic system. The formalism proposed by Wilcox *et al.* [6] is close to ours, in the sense that the use of the tensorial forms of strain and stress fields is preserved, but it is only developed for the isotropic case and for the first-order velocity-strain formulation. While, the formalism used in [7, 9, 10] is a “classical” one and is very different to ours, because the strain and stress tensors are reformulated under a vector form.

As numerical applications, firstly, an example with a physical interface separating two materials, one anisotropic and the other isotropic, is studied. Then,

polycrystalline materials that present a particularly interesting case of heterogeneous media with a very large number of physical interfaces are considered. Ultrasonic wave propagation in single-phase and untextured polycrystalline materials composed of a large number of elliptic grains are simulated. The proposed numerical fluxes are numerically investigated and validated.

The paper is organized as follows. In Section 2, the unified variational framework using intrinsic tensorial expressions that was proposed in [8] is recalled for both first-order velocity-stress and velocity-strain hyperbolic systems of elastic wave equations. Section 3 presents the development of different upwind numerical fluxes for the first-order velocity-stress wave system. The necessity of defining a mechanically relevant Riemann problem at a physical interface is particularly discussed. Section 4 applies the proposed approach to the case of the first-order velocity-strain wave system. Finally, in Section 5, the proposed numerical fluxes are applied to the cases where one or more physical interfaces exist.

2. First-order elastic wave governing equations and their variational frameworks

The governing equations of elastic wave propagation are firstly given in the form of a first-order velocity-stress system with velocity and stress field as primary unknowns [2, 3, 4, 5] (see Eqs. (22.14–22.15) in [2]). Then, the unified and wave oriented variational framework is introduced within which the eigen characteristics of the first-order hyperbolic system are presented and the variational discontinuous Galerkin formulation is given. Finally, the first-order velocity-strain wave equations used by Wilcox *et al.* [6] are also considered in the present work, as only isotropic media with physical interfaces were studied by those authors.

2.1. First-order velocity-stress elastic wave equations

We consider the wave propagation in an elastic medium $\Omega \subset \mathbb{R}^d$ of space dimension d ($d = 1, 2, 3$) and in a time interval $[0, T]$. The first-order velocity-stress governing equations can be written as follows: $\forall (\mathbf{x}, t) \in \Omega \times]0, T[$

$$\partial_t \mathbf{U} + \mathbf{A}^{\partial_x}(\mathbf{U}) = \mathbf{0} \quad \text{or} \quad \begin{cases} \partial_t \mathbf{v} - \rho^{-1} \mathbf{Div}_x \boldsymbol{\sigma} &= \mathbf{0} \\ \partial_t \boldsymbol{\sigma} - \mathbf{C} : \boldsymbol{\varepsilon}(\mathbf{v}) &= \mathbf{0} \end{cases} \quad (1)$$

The tensorial compact form in (1) has been proposed by the authors in [8]. The generalized unknown $\mathbf{U}(\mathbf{x}, t) = (\mathbf{v}(\mathbf{x}, t) \ \boldsymbol{\sigma}(\mathbf{x}, t))^T$ is composed of $\mathbf{v}$ the velocity unknown and $\boldsymbol{\sigma}$ the stress unknown, with $(\cdot)^T$ the adjoint operator. Hence, $\mathbf{U}(\mathbf{x}, t)$ is a field in $\mathbb{R}^d \times \mathbb{R}^{d \times d_{sym}}$ and defined over the open set $\Omega \times]0, T[$, with $\mathbb{R}^{d \times d_{sym}}$ indicating that $\boldsymbol{\sigma}$ is a $d \times d$ symmetric second-order tensor. The partial derivative operator with respect to time is denoted ∂_t . The space derivative operator $\mathbf{A}^{\partial_x}$ and its adjoint $\mathbf{A}^{\partial_x, T}$ (useful hereafter) are defined as follows: $\forall \mathbf{W} = (\mathbf{w} \ \boldsymbol{\tau})^T$

$$\mathbf{A}^{\partial_x} \begin{pmatrix} \mathbf{w} \\ \boldsymbol{\tau} \end{pmatrix} = \begin{pmatrix} -\rho^{-1} \mathbf{Div}_x \boldsymbol{\tau} \\ -\mathbf{C} : \boldsymbol{\varepsilon}(\mathbf{w}) \end{pmatrix}, \quad \mathbf{A}^{\partial_x, T} \begin{pmatrix} \mathbf{w} \\ \boldsymbol{\tau} \end{pmatrix} = \begin{pmatrix} -\mathbf{Div}_x(\mathbf{C} : \boldsymbol{\tau}) \\ -\rho^{-1} \boldsymbol{\varepsilon}(\mathbf{w}) \end{pmatrix} \quad (2)$$

where ρ denotes the density, $\mathbf{C}$ the fourth-order elasticity tensor, and “ $\cdot$ ” the usual double dot product between two tensors defined as $(\mathbf{C} : \boldsymbol{\varepsilon})_{ij} = C_{ijkl}\varepsilon_{kl}$. Herein, the Einstein summation convention is systematically used, and all the vectors and tensors are denoted using bold letters.

The two equations of (1) express respectively the elastodynamic equilibrium and the time derivative of the Hooke’s law of elasticity. No body force is considered in the equilibrium equation without loss of generality of the purpose of the present work.

It is useful to recall that, according to the definition of the second-order infinitesimal strain tensor $\boldsymbol{\varepsilon}$, we have:

$$\boldsymbol{\varepsilon}(\mathbf{w}) = \frac{1}{2} \left(\mathbf{D}_x \mathbf{w} + \mathbf{D}_x^T \mathbf{w} \right) = \frac{\partial \mathbf{w}}{\partial x_i} \otimes_s \mathbf{e}_i \quad (3)$$

with the following usual space gradient and divergence operators defined using an orthonormal basis $(\mathbf{e}_i)_{i=1,\dots,d}$:

$$\mathbf{D}_x \mathbf{w} = \frac{\partial \mathbf{w}}{\partial x_i} \otimes \mathbf{e}_i, \quad \text{Div}_x \boldsymbol{\tau} = \frac{\partial \boldsymbol{\tau}}{\partial x_i} \cdot \mathbf{e}_i \quad (4)$$

In (4), “ $\otimes$ ” denotes the usual tensor product between two vectors: $(\mathbf{a} \otimes \mathbf{b})_{ij} = a_i b_j$ and “ $\cdot$ ” the usual dot product between a tensor and a vector: $(\mathbf{A} \cdot \mathbf{a})_i = A_{ij} a_j$. In (3), “ $\otimes_s$ ” is the symmetrized tensor product defined as: $(\mathbf{a} \otimes_s \mathbf{b})_{ij} = \frac{1}{2}(a_i b_j + a_j b_i)$. Otherwise, it is useful to define the dot product in the vectorial space $\mathbb{R}^d \times \mathbb{R}^{d \times d_{sym}}$: $\forall \mathbf{W}_i = (\mathbf{w}_i \ \boldsymbol{\tau}_i)^T, (i = 1, 2)$,

$$\mathbf{W}_1 \cdot \mathbf{W}_2 = \mathbf{w}_1 \cdot \mathbf{w}_2 + \boldsymbol{\tau}_1 : \boldsymbol{\tau}_2 \quad (5)$$

According to (4), it is easy to show that, on the boundary ∂D of any subdomain $D \subseteq \Omega$, the flux operator $\mathbf{F}_{\mathbf{n}}$ (with $\mathbf{n} = n_i \mathbf{e}_i$ the outward unit normal vector defined on ∂D) associated to the first-order system (1) is in fact equal to $\mathbf{A}_{\mathbf{n}}$, the Jacobian operator in the $\mathbf{n}$ direction: $\forall \mathbf{W} = (\mathbf{w} \ \boldsymbol{\tau})^T$,

$$\mathbf{F}_{\mathbf{n}}(\mathbf{W}) = \mathbf{A}_{\mathbf{n}}(\mathbf{W}) = \begin{pmatrix} -\rho^{-1} \boldsymbol{\tau} \cdot \mathbf{n} \\ -\mathbf{C} : (\mathbf{n} \otimes_s \mathbf{w}) \end{pmatrix} \quad (6)$$

In (6), the subscript index “ $\mathbf{n}$ ” indicates the dependency of $\mathbf{F}_{\mathbf{n}}$ and of $\mathbf{A}_{\mathbf{n}}$ on $\mathbf{n}$. In the following, the local orthonormal basis defined on $\partial\Omega$ will be denoted by $(\mathbf{n}, \{\mathbf{t}_\alpha\}_{\alpha=1,\dots,d-1})$.

Finally, to complete the definition of the elastic wave propagation problem, the following boundary conditions are prescribed:

$$\boldsymbol{\sigma} \cdot \mathbf{n} = \mathbf{g}, \quad \text{on } \partial\Omega_N \times]0, T[\quad (7a)$$

$$\mathbf{v} = \partial_t \mathbf{u}_D, \quad \text{on } \partial\Omega_D \times]0, T[\quad (7b)$$

The first equation (7a) expresses the Neumann boundary conditions with imposed surface loadings $\mathbf{g}$, and the second one (7b) expresses the Dirichlet boundary conditions with prescribed displacements $\mathbf{u}_D$. We recall that the conditions

$\partial\Omega_N \cup \partial\Omega_D = \partial\Omega$ and $\partial\Omega_N \cap \partial\Omega_D = \emptyset$ should be verified. The following initial conditions are also necessary:

$$\boldsymbol{\sigma}(\mathbf{x}, 0) = \mathbf{C} : \boldsymbol{\varepsilon}(\mathbf{u}_0(\mathbf{x})), \quad \forall \mathbf{x} \in \Omega \quad (8a)$$

$$\mathbf{v}(\mathbf{x}, 0) = \mathbf{v}_0(\mathbf{x}), \quad \forall \mathbf{x} \in \Omega \quad (8b)$$

To develop the variational framework for the space dG method, we recall that an approximated solution $\mathbf{U}_h = (\mathbf{v}_h \ \boldsymbol{\sigma}_h)^T$ of the generalized unknown $\mathbf{U} = (\mathbf{v} \ \boldsymbol{\sigma})^T$ is sought for, and, in contrast to continuous finite element methods, $\mathbf{U}_h$ is discontinuous from one element to another.

Let $\mathcal{M}_h = \{\Omega_k\}_k$ denote a finite element mesh of Ω . In the following, any element Ω_k of the mesh $\mathcal{M}_h$ will be denoted by E and any of its neighboring elements by E' . The discontinuous solutions in E and E' are respectively denoted by $\mathbf{U}_h$ and $\mathbf{U}'_h$. Then, the space dG variational formulation of the elastic wave model problem (1) for any element E can be put into two equivalent forms: $\forall \mathbf{W}_h(\mathbf{x}) = (\mathbf{w}_h(\mathbf{x}) \ \boldsymbol{\tau}_h(\mathbf{x}))^T$

$$(\mathbf{W}_h, \partial_t \mathbf{U}_h)_E - (\mathbf{A}^{\partial_x, T}(\mathbf{W}_h), \mathbf{U}_h)_E + \langle \mathbf{W}_h, \hat{\mathbf{F}}_n(\mathbf{U}_h, \mathbf{U}'_h) \rangle_{\partial E} = 0 \quad (9a)$$

$$(\mathbf{W}_h, \partial_t \mathbf{U}_h)_E + (\mathbf{W}_h, \mathbf{A}^{\partial_x}(\mathbf{U}_h))_E + \langle \mathbf{W}_h, \hat{\mathbf{F}}_n(\mathbf{U}_h, \mathbf{U}'_h) - \mathbf{F}_n(\mathbf{U}_h) \rangle_{\partial E} = 0 \quad (9b)$$

In (9), the inner products are defined as follows by recalling the definition of the dot product given in (5):

$$\begin{aligned} (\mathbf{w}_1, \mathbf{w}_2)_E &= \int_E \mathbf{w}_1 \cdot \mathbf{w}_2 \, dV, (\boldsymbol{\tau}_1, \boldsymbol{\tau}_2)_E = \int_E \boldsymbol{\tau}_1 : \boldsymbol{\tau}_2 \, dV \\ (\mathbf{W}_1, \mathbf{W}_2)_E &= \int_E \mathbf{W}_1 \cdot \mathbf{W}_2 \, dV = (\mathbf{w}_1, \mathbf{w}_2)_E + (\boldsymbol{\tau}_1, \boldsymbol{\tau}_2)_E \end{aligned} \quad (10)$$

One of the basic ideas of the space dG method is to replace the discontinuous flux $\mathbf{F}_n(\mathbf{U}_h)$ on the element boundary ∂E by a numerical flux $\hat{\mathbf{F}}_n(\mathbf{U}_h, \mathbf{U}'_h)$. Hence, an appropriate choice of the numerical flux is essential for the success of the space dG method. Only the definition of the numerical flux on the interior element boundary $\partial E_{int} = \partial E \setminus (\partial E \cap \partial\Omega)$, which should also depend on the solution $\mathbf{U}'_h$ in the neighboring elements E' of E , is studied in the present work.

As for the numerical flux on external element boundary $\partial E_{ext} = \partial E \cap \partial\Omega$, a ghost neighbor element E' having the same mechanical behavior as E is introduced [2]. In E' , it should be imposed that: $\boldsymbol{\sigma}'_h \cdot \mathbf{n} = 2\mathbf{g} - \boldsymbol{\sigma}_h \cdot \mathbf{n}$ and $\mathbf{v}'_h = \mathbf{v}_h$ for the Neumann boundary conditions on $\partial\Omega_N$, and $\boldsymbol{\sigma}'_h \cdot \mathbf{n} = \boldsymbol{\sigma}_h \cdot \mathbf{n}$ and $\mathbf{v}'_h = 2\partial_t \mathbf{u}_D - \mathbf{v}_h$ for the Dirichlet boundary conditions on $\partial\Omega_D$.

Otherwise, we have chosen in our numerical studies to implement the second variational dG formulation (9b), because the terms involved in the differential operator $\mathbf{A}^{\partial_x}$ are slightly more conventional than those involved in the differential operator $\mathbf{A}^{\partial_x, T}$, which is invoked by (9a).

2.2. First-order velocity-strain elastic wave equations

For the first-order velocity-strain wave equations used in [6], the generalized unknown $\mathbf{U}(\mathbf{x}, t) = (\mathbf{v}(\mathbf{x}, t) \ \boldsymbol{\varepsilon}(\mathbf{x}, t))^T$ is composed of $\mathbf{v}$ the velocity unknown

137 and ε the strain unknown. The corresponding tensorial compact form can be
 138 written as follows: $\forall(\mathbf{x}, t) \in \Omega \times]0, T[$

$$M(\partial_t \mathbf{U}) + \mathbf{A}^{\partial_x}(\mathbf{U}) = \mathbf{0} \quad \text{or} \quad \begin{aligned} \rho \partial_t \mathbf{v} - \text{Div}_x(\mathbf{C} : \varepsilon) &= \mathbf{0} \\ \partial_t \varepsilon - \mathbf{C} : \varepsilon(\mathbf{v}) &= \mathbf{0} \end{aligned} \quad (11)$$

139 In (11), the infinitesimal strain operator $\varepsilon(\cdot)$ defined by (3) should be distin-
 140 guished from the primary unknown $\varepsilon = \varepsilon(\mathbf{x}, t)$. The operator $\mathbf{M}$ and the space
 141 derivative operator $\mathbf{A}^{\partial_x}$ are defined as follows: $\forall \mathbf{W} = (\mathbf{w} \ \boldsymbol{\tau})^T$

$$\mathbf{M} \begin{pmatrix} \mathbf{w} \\ \boldsymbol{\tau} \end{pmatrix} = \begin{pmatrix} \rho \mathbf{w} \\ \boldsymbol{\tau} \end{pmatrix}, \quad \mathbf{A}^{\partial_x} \begin{pmatrix} \mathbf{w} \\ \boldsymbol{\tau} \end{pmatrix} = \begin{pmatrix} -\text{Div}_x(\mathbf{C} : \boldsymbol{\tau}) \\ -\varepsilon(\mathbf{w}) \end{pmatrix} \quad (12)$$

142 Then, the flux operator $\mathbf{F}_n$ associated to the first-order system (11) and
 143 the Jacobian operator $\mathbf{A}_n$ in the $\mathbf{n}$ direction verify the following equations:
 144 $\forall \mathbf{W} = (\mathbf{w} \ \boldsymbol{\tau})^T$,

$$\mathbf{F}_n(\mathbf{W}) = \mathbf{A}_n(\mathbf{W}) = \begin{pmatrix} -(\mathbf{C} : \boldsymbol{\tau}) \cdot \mathbf{n} \\ -\mathbf{n} \otimes_s \mathbf{w} \end{pmatrix} \quad (13)$$

145 The corresponding variational framework reads as:

$$(\mathbf{W}_h, \mathbf{M}(\partial_t \mathbf{U}_h))_E + (\mathbf{W}_h, \mathbf{A}^{\partial_x}(\mathbf{U}_h))_E + \langle \mathbf{W}_h, \hat{\mathbf{F}}_n(\mathbf{U}_h, \mathbf{U}'_h) - \mathbf{F}_n(\mathbf{U}_h) \rangle_{\partial E} = 0 \quad (14)$$

146 It is worth noticing that the same notations are used in this paper for both
 147 velocity-stress and velocity-strain systems but may have different definitions.

148 3. Upwind numerical fluxes for the 1st-order velocity-stress system

149 In this section, upwind numerical fluxes are firstly developed for the first-
 150 order velocity-stress wave equations. It is emphasized that the unified and
 151 elastic wave oriented variational framework previously proposed in [8] allows a
 152 simple, compact and intrinsic expression of the Jacobian operator of the first-
 153 order hyperbolic system (1) in terms of its eigenvalues and eigenmodes. As a
 154 consequence, a systematic development of numerical fluxes can be formulated
 155 in the multidimensional and general case, *i.e.* anisotropic and heterogeneous
 156 media with physical interfaces. Moreover, it allows a better understanding of
 157 the physical meaning of the terms involved in the developed numerical fluxes.

158 Before giving the definition of the Riemann problem on element interfaces,
 159 it is useful to recall some important results given in [8].

160 First, the normal Jacobian operator $\mathbf{A}_n$ (defined by (6)) of the first-order
 161 velocity-stress wave equations (1) can be decomposed as follows, using its two
 162 eigenbases:

$$\mathbf{A}_n = \lambda_{\mathbf{n},k}^- \mathbf{R}_{\mathbf{n},k}^- \otimes \mathbf{L}_{\mathbf{n},k}^- + \lambda_{\mathbf{n},k}^+ \mathbf{R}_{\mathbf{n},k}^+ \otimes \mathbf{L}_{\mathbf{n},k}^+ \quad (15)$$

163 where $(\lambda_{\mathbf{n},k}^-, \mathbf{R}_{\mathbf{n},k}^-, \mathbf{L}_{\mathbf{n},k}^-)_{k=qL, \{qT_\alpha\}_{\alpha=1, d-1}}$ and $(\lambda_{\mathbf{n},k}^+, \mathbf{R}_{\mathbf{n},k}^+, \mathbf{L}_{\mathbf{n},k}^+)_{k=qL, \{qT_\alpha\}_{\alpha=1, d-1}}$
 164 are respectively the strictly negative and positive eigenvalues and the corre-
 165 sponding right and left eigenvectors of $\mathbf{A}_n$. The left eigenvectors are the eigen-
 166 vectors of the adjoint of $\mathbf{A}_n$.

As a matter of fact, among the $m = d + d(d + 1)/2$ eigenvalues of $\mathbf{A}_{\mathbf{n}}$, there are d strictly negative eigenvalues $(\lambda_{\mathbf{n},k}^- = -c_{\mathbf{n},k})_{k=qL, \{qT_\alpha\}_{\alpha=1, \dots, d-1}}$ and d strictly positive eigenvalues $(\lambda_{\mathbf{n},k}^+ = c_{\mathbf{n},k})_{k=qL, \{qT_\alpha\}_{\alpha=1, \dots, d-1}}$, $c_{\mathbf{n},qL}$ and $c_{\mathbf{n},qT_\alpha}$ being respectively the velocity of quasi longitudinal and quasi transverse wave modes propagating in the $\mathbf{n}$ direction. The subscript indices “ qL ” and “ qT ” respectively refer to terms “quasi longitudinal” and “quasi transverse”.

Then, it has been shown that the right and left eigenmodes corresponding to the nonzero eigenvalues of $\mathbf{A}_{\mathbf{n}}$ are the following: $\forall k = qL, \{qT_\alpha\}_{\alpha=1, \dots, d-1}$

$$\mathbf{R}_{\mathbf{n},k}^\pm = \begin{pmatrix} \mathbf{w}_{\mathbf{n},k} \\ -\rho(z_{\mathbf{n},k}^\pm)^{-1} \mathbf{C} : (\mathbf{n} \otimes_s \mathbf{w}_{\mathbf{n},k}) \end{pmatrix}, \quad \mathbf{L}_{\mathbf{n},k}^\pm = \begin{pmatrix} \mathbf{w}_{\mathbf{n},k} \\ -(z_{\mathbf{n},k}^\pm)^{-1} \mathbf{n} \otimes_s \mathbf{w}_{\mathbf{n},k} \end{pmatrix} \quad (16)$$

with $z_{\mathbf{n},k}^\pm = \rho \lambda_{\mathbf{n},k}^\pm$ the acoustic impedance, $\mathbf{w}_{\mathbf{n},k} = \frac{1}{\sqrt{2}} \boldsymbol{\gamma}_{\mathbf{n},k}$, $(\boldsymbol{\gamma}_{\mathbf{n},k})_{k=qL, \{qT_\alpha\}_{\alpha=1, \dots, d-1}}$ the unit eigenvectors of the following usual eigensystem of $\boldsymbol{\Gamma}_{\mathbf{n}}$ the Christoffel tensor:

$$\boldsymbol{\Gamma}_{\mathbf{n}} \cdot \boldsymbol{\gamma}_{\mathbf{n},k} = \lambda_{\mathbf{n},k}^2 \boldsymbol{\gamma}_{\mathbf{n},k} \quad (17)$$

The definition of the Christoffel tensor $\boldsymbol{\Gamma}_{\mathbf{n}}$ is recalled in the following:

$$\boldsymbol{\Gamma}_{\mathbf{n}} \cdot \mathbf{w} = \rho^{-1} (\mathbf{C} : (\mathbf{n} \otimes_s \mathbf{w})) \cdot \mathbf{n}, \quad \forall \mathbf{w} \quad (18)$$

For instance, in the 3D case, there are one quasi longitudinal wave mode and two quasi transverse wave modes. We recall that the word “quasi” means that, in contrast to the isotropic case, we have in the general anisotropic case neither pure longitudinal wave mode verifying $\boldsymbol{\gamma}_{\mathbf{n},qL} \parallel \mathbf{n}$ nor pure transverse waves modes verifying $\boldsymbol{\gamma}_{\mathbf{n},qT} \perp \mathbf{n}$.

Furthermore, we note that the right and left eigenmodes corresponding to the zero eigenvalues of $\mathbf{A}_{\mathbf{n}}$ are not recalled herein, as they are not involved in the decomposition of $\mathbf{A}_{\mathbf{n}}$ (15) and therefore are not involved in flux terms exchanged on element interfaces.

Among existing works, the numerical flux proposed in [3, 4] uses the same velocity-stress formulation (1), but it is only an approximate solution of the Riemann problem defined on a physical interface across which material properties are discontinuous. However, we have shown in [8] that, when a numerical flux is not the exact solution of the Riemann problem, it works only when the degree of discontinuity across the physical interface is low. Hereafter, a systematic development of upwind numerical fluxes that are exact solutions of the Riemann problem in the multidimensional case, *i.e.* 2D and 3D, is proposed.

Otherwise, another important result we have shown in the 1D case is that solving exactly the Riemann problem at element interfaces is not a sufficient condition to get physically sound numerical solutions [8]. Indeed, different equivalent strong forms of the elastic wave problem give rise to different forms of the Riemann problem and consequently to different interface conditions, which are not all physically coherent. To perform the same analysis in the multidimensional case, two upwind numerical fluxes are developed in the following: the first one is the solution of the Riemann problem directly defined from the first-order velocity-stress system (1), while the second one is the solution of

205 the Riemann problem modified by taking into account the classical mechanical
 206 interface conditions in terms of velocity and stress vector fields.

207 3.1. Upwind flux directly derived from the first-order $\mathbf{v}$ - $\boldsymbol{\sigma}$ system (1)

208 We consider the interface of two adjacent elements E and E' having respec-
 209 tively $(\rho, \mathbf{C}, \mathbf{U}_h)$ and $(\rho', \mathbf{C}', \mathbf{U}'_h)$ as densities, elastic moduli and initial states
 210 (Figure 1). The Riemann problem defines the states that are results of the
 211 propagation of the discontinuity $\mathbf{U}_h - \mathbf{U}'_h$. In the following, all the equations
 are written in the 3D case without loss of generality.

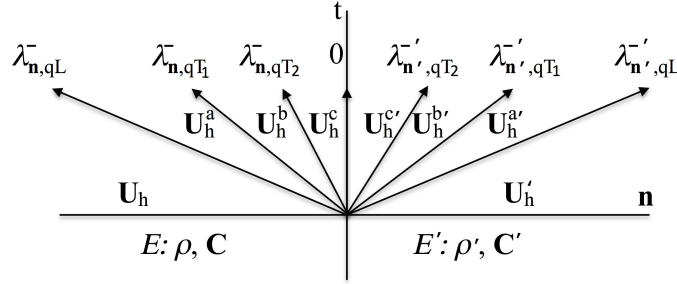


Figure 1: Sketch illustrating the Rankine-Hugoniot jump conditions in the Riemann problem in the 3D case.

212

In the 3D anisotropic case and by assuming $\lambda_{\mathbf{n},qL}^- < \lambda_{\mathbf{n},qT1}^- < \lambda_{\mathbf{n},qT2}^-$, the Rankine-Hugoniot jump conditions for the first-order velocity-stress system (1) are illustrated in Figure 1 and read as [2, 8, 6, 15]:

$$\mathbf{A}_{\mathbf{n}}(\mathbf{U}_h - \mathbf{U}_h^a) = \lambda_{\mathbf{n},qL}^-(\mathbf{U}_h - \mathbf{U}_h^a) \quad (19a)$$

$$\mathbf{A}_{\mathbf{n}}(\mathbf{U}_h^a - \mathbf{U}_h^b) = \lambda_{\mathbf{n},qT1}^-(\mathbf{U}_h^a - \mathbf{U}_h^b), \mathbf{A}_{\mathbf{n}}(\mathbf{U}_h^b - \mathbf{U}_h^c) = \lambda_{\mathbf{n},qT2}^-(\mathbf{U}_h^b - \mathbf{U}_h^c) \quad (19b)$$

$$\mathbf{A}_{\mathbf{n}} \cdot \mathbf{U}_h^c + \mathbf{A}'_{\mathbf{n}'} \cdot \mathbf{U}_h^{c'} = \mathbf{0} \quad (19c)$$

$$\mathbf{A}'_{\mathbf{n}'}(\mathbf{U}_h^{b'} - \mathbf{U}_h^{c'}) = \lambda_{\mathbf{n}',qT2}^-(\mathbf{U}_h^{b'} - \mathbf{U}_h^{c'}), \mathbf{A}'_{\mathbf{n}'}(\mathbf{U}_h^{a'} - \mathbf{U}_h^{b'}) = \lambda_{\mathbf{n}',qT1}^-(\mathbf{U}_h^{a'} - \mathbf{U}_h^{b'}) \quad (19d)$$

$$\mathbf{A}'_{\mathbf{n}'}(\mathbf{U}'_h - \mathbf{U}_h^{a'}) = \lambda_{\mathbf{n},qL}^-(\mathbf{U}'_h - \mathbf{U}_h^{a'}) \quad (19e)$$

We note that the two outward unit normal vectors of E and E' on their interface verify $\mathbf{n} + \mathbf{n}' = \mathbf{0}$. According to the definition of the eigenvalues and eigenvectors

of $\mathbf{A}_n$, the following equations hold:

$$\mathbf{U}_h - \mathbf{U}_h^a = \alpha_{qL} \mathbf{R}_{n,qL}^-, \mathbf{U}_h^a - \mathbf{U}_h^b = \alpha_{qT_1} \mathbf{R}_{n,qT_1}^-, \mathbf{U}_h^b - \mathbf{U}_h^c = \alpha_{qT_2} \mathbf{R}_{n,qT_2}^- \quad (20a)$$

$$\mathbf{U}_h' - \mathbf{U}_h^{a'} = \alpha'_{qL} \mathbf{R}_{n',qL}^-, \mathbf{U}_h^{a'} - \mathbf{U}_h^{b'} = \alpha'_{qT_1} \mathbf{R}_{n',qT_1}^-, \mathbf{U}_h^{b'} - \mathbf{U}_h^{c'} = \alpha'_{qT_2} \mathbf{R}_{n',qT_2}^- \quad (20b)$$

By respectively adding the three first equations given by (19a)–(19b) and the three last equations given by (19d)–(19e) and by applying (20), the Rankine–Hugoniot jump conditions finally become:

$$\mathbf{A}_n(\mathbf{U}_h) - \mathbf{A}_n(\mathbf{U}_h^c) = \alpha_k \lambda_{n,k}^- \mathbf{R}_{n,k}^- \quad (21a)$$

$$\mathbf{A}_n(\mathbf{U}_h^c) + \mathbf{A}'_{n'}(\mathbf{U}_h^{c'}) = \mathbf{0} \quad (21b)$$

$$\mathbf{A}'_{n'}(\mathbf{U}_h') - \mathbf{A}'_{n'}(\mathbf{U}_h^{c'}) = \alpha'_k \lambda_{n',k}^- \mathbf{R}_{n',k}^- \quad (21c)$$

In the case where $\lambda_{n,qT_1}^- = \lambda_{n,qT_2}^-$ (resp. $\lambda_{n',qT_1}^- = \lambda_{n',qT_2}^-$), the two arrows λ_{n,qT_1}^- and λ_{n,qT_2}^- (resp. λ_{n',qT_1}^- and λ_{n',qT_2}^-) in Figure 1 overlap, and the state $\mathbf{U}_h^b$ (resp. $\mathbf{U}_h^{b'}$) is removed. Then, the equations (19b) and (20a) become:

$$\mathbf{A}_n(\mathbf{U}_h^a - \mathbf{U}_h^c) = \lambda_{n,qT_1}^- (\mathbf{U}_h^a - \mathbf{U}_h^c) \quad (22a)$$

$$\mathbf{U}_h - \mathbf{U}_h^a = \alpha_{qL} \mathbf{R}_{n,qL}^-, \mathbf{U}_h^a - \mathbf{U}_h^c = \alpha_{qT_1} \mathbf{R}_{n,qT_1}^- + \alpha_{qT_2} \mathbf{R}_{n,qT_2}^- \quad (22b)$$

213 which finally lead to the same Rankine–Hugoniot jump conditions (21a). Same
214 remark holds for the quantities related to the element E' and the corresponding
215 equations (19d), (20b) and (21c).

Solving the Riemann problem (21) leads to the determination of the six unknown states $\{\mathbf{U}^a, \mathbf{U}^b, \mathbf{U}^c, \mathbf{U}^{a'}, \mathbf{U}^{b'}, \mathbf{U}^{c'}\}$, *i.e.*, the six characteristic coefficients $\{\alpha_k, \alpha'_k\}_{k=qL,qT_1,qT_2}$. Then, upwind numerical fluxes defined as $\hat{\mathbf{F}}_n(\mathbf{U}_h, \mathbf{U}_h') = \mathbf{A}_n(\mathbf{U}_h^c) = \frac{1}{2}(\mathbf{A}_n(\mathbf{U}_h^c) - \mathbf{A}'_{n'}(\mathbf{U}_h^{c'}))$ can be calculated by using the following two equivalent forms:

$$\hat{\mathbf{F}}_n(\mathbf{U}_h, \mathbf{U}_h') = \frac{1}{2}(\mathbf{A}_n(\mathbf{U}_h) - \mathbf{A}'_{n'}(\mathbf{U}_h') - \alpha_k \lambda_{n,k}^- \mathbf{R}_{n,k}^- + \alpha'_k \lambda_{n',k}^- \mathbf{R}_{n',k}^-) \quad (23a)$$

$$= \mathbf{A}_n(\mathbf{U}_h) - \alpha_k \lambda_{n,k}^- \mathbf{R}_{n,k}^- \quad (23b)$$

216 It is worth noticing that the two forms (23a) and (23b) are equivalent only in the
217 case where the Riemann problem (21) is exactly solved. Otherwise, according
218 to (21b), the flux defined by (23) is conservative, *i.e.*, from the point of view of
219 the neighboring element E' , we have $\hat{\mathbf{F}}_{n'}(\mathbf{U}_h', \mathbf{U}_h) = -\hat{\mathbf{F}}_n(\mathbf{U}_h, \mathbf{U}_h')$.

220 Now, the solving of the Riemann problem is considered. Two operators
221 $\wp_{vect}(\cdot)$ and $\wp_{tens}(\cdot)$ are defined: when applied to a generalized vector $\mathbf{W} =$
222 $(\mathbf{w} \ \boldsymbol{\tau})^T$, they respectively give its vectorial and tensorial components:

$$\wp_{vect}(\mathbf{W}) = \mathbf{w} \ , \ \wp_{tens}(\mathbf{W}) = \boldsymbol{\tau} \quad (24)$$

Using $\wp_{vect}$ and $\wp_{tens}$, the vectorial part and the tensorial parts of the equations (21b) can be separately manipulated. According to the definition of the Jacobian operator (6) and the definition (18) of the Christoffel tensor $\Gamma_{\mathbf{n}}$, (21b) is rewritten as follows:

$$\frac{\sigma_h^c \cdot \mathbf{n}}{\rho} + \frac{\sigma_h^{c'} \cdot \mathbf{n}'}{\rho'} = \mathbf{0}, \quad \rho \Gamma_{\mathbf{n}} \cdot \mathbf{v}_h^c - \rho' \Gamma_{\mathbf{n}'} \cdot \mathbf{v}_h^{c'} = \mathbf{0} \quad (25)$$

The second equation of (25) is obtained by applying the operator $\mathbf{n} \cdot \wp_{tens}$ to Eq.(21b).

Then, by eliminating the two unknown states $\mathbf{U}_h^c$ and $\mathbf{U}_h^{c'}$ in (21) and using (25), the following result is obtained.

Theorem 3.1. *The characteristic coefficients $\{\alpha_k, \alpha'_k\}_{k=qL, qT_1, qT_2}$ of the Riemann problem (21) are the solution of the following system of linear equations:*

$$\begin{bmatrix} [I_d] & [B] \\ [B'] & [I_d] \end{bmatrix} \cdot \begin{pmatrix} \{\alpha_k\} \\ \{\alpha'_k\} \end{pmatrix} = \begin{pmatrix} \{^* \mathbf{L}_{\mathbf{n},k}^- \cdot \mathbf{U}_h - ^{**} \mathbf{L}_{\mathbf{n},k}^- \cdot \mathbf{U}_h'\} \\ \{^* \mathbf{L}_{\mathbf{n}',k}^{-'} \cdot \mathbf{U}_h' - ^{**} \mathbf{L}_{\mathbf{n}',k}^{-'} \cdot \mathbf{U}_h\} \end{pmatrix} \quad (26)$$

In (26), $[I_d]$ is the $d \times d$ identity matrix, and $[B]$ and $[B']$ are $d \times d$ matrices with zero diagonal terms and the following extra-diagonal terms:

$$B_{kl,k \neq l} = \frac{C_{z,k}^-}{2} \frac{\rho}{\rho'} \frac{z_{\mathbf{n}',l}^{-'} \delta z_{\mathbf{n}',kl}^{-'}}{z_{\mathbf{n},k}^- z_{\mathbf{n}',k}^{-'}} \gamma_{\mathbf{n},k} \cdot \gamma_{\mathbf{n}',l}', \quad B'_{kl,k \neq l} = \frac{C_{z,k}^{-'}}{2} \frac{\rho'}{\rho} \frac{z_{\mathbf{n},l}^- \delta z_{\mathbf{n},kl}^-}{z_{\mathbf{n}',k}^{-'} z_{\mathbf{n},k}^-} \gamma_{\mathbf{n}',k}' \cdot \gamma_{\mathbf{n},l} \quad (27)$$

with $\delta z_{\mathbf{n},kl}^- = z_{\mathbf{n},k}^- - z_{\mathbf{n},l}^-$, $\delta z_{\mathbf{n}',kl}^{-'} = z_{\mathbf{n}',k}^{-'} - z_{\mathbf{n}',l}^{-'}$, and :

$$C_{z,k}^- = \frac{\overline{z_{\mathbf{n},k}^-}^R}{z_{\mathbf{n},k}^-} = \frac{z_{\mathbf{n},k}^{-'}}{\overline{z_{\mathbf{n},k}^-}^V} > 0, \quad C_{z,k}^{-'} = \frac{\overline{z_{\mathbf{n},k}^-}^R}{z_{\mathbf{n}',k}^{-'}} = \frac{z_{\mathbf{n},k}^-}{\overline{z_{\mathbf{n},k}^-}^V} > 0 \quad (28)$$

$\overline{z_{\mathbf{n},k}^-}^R$ and $\overline{z_{\mathbf{n},k}^-}^V$ respectively denote the harmonic and arithmetic means of the acoustic impedances of the k -th eigenvector. $\{^* \mathbf{L}_{\mathbf{n},k}^-, ^{**} \mathbf{L}_{\mathbf{n},k}^-, ^* \mathbf{L}_{\mathbf{n}',k}^{-'}, ^{**} \mathbf{L}_{\mathbf{n}',k}^{-'}\}$ are the perturbed left eigenmodes of $\{\mathbf{A}_{\mathbf{n}}, \mathbf{A}_{\mathbf{n}'}'\}$ calculated by using the material properties of the adjacent element in the following way:

$$\begin{aligned} ^* \mathbf{L}_{\mathbf{n},k}^- &= \begin{pmatrix} C_{z,k}^{-'} \wp_{vect}(\mathbf{L}_{\mathbf{n},k}^-) \\ C_{z,k}^- \wp_{tens}(\mathbf{L}_{\mathbf{n},k}^-) \end{pmatrix}, \quad ^{**} \mathbf{L}_{\mathbf{n},k}^- = \begin{pmatrix} \frac{\rho \rho'}{(z_{\mathbf{n},k}^-)^2} \Gamma_{\mathbf{n}'}' \cdot \wp_{vect}(^* \mathbf{L}_{\mathbf{n},k}^-) \\ \frac{\rho}{\rho'} \wp_{tens}(^* \mathbf{L}_{\mathbf{n},k}^-) \end{pmatrix} \\ ^* \mathbf{L}_{\mathbf{n}',k}^{-'} &= \begin{pmatrix} C_{z,k}^- \wp_{vect}(\mathbf{L}_{\mathbf{n}',k}^{-'}) \\ C_{z,k}^{-'} \wp_{tens}(\mathbf{L}_{\mathbf{n}',k}^{-'}) \end{pmatrix}, \quad ^{**} \mathbf{L}_{\mathbf{n}',k}^{-'} = \begin{pmatrix} \frac{\rho' \rho}{(z_{\mathbf{n}',k}^{-'})^2} \Gamma_{\mathbf{n}} \cdot \wp_{vect}(^* \mathbf{L}_{\mathbf{n}',k}^{-'}) \\ \frac{\rho'}{\rho} \wp_{tens}(^* \mathbf{L}_{\mathbf{n}',k}^{-'}) \end{pmatrix} \end{aligned} \quad (29)$$

241 *Proof.* See Appendix A1. □

242

243 It is worth noticing that the perturbed left eigenmodes $\{^*L_{n,k}^-, **L_{n,k}^-\}$ and
 244 $\{^*L_{n',k}^-, **L_{n',k}^-\}$ take into account the coupling between the wave modes of the
 245 same type, *e.g.*, both qL -modes, of the adjacent elements E and E' . In contrast,
 246 the matrices $[B]$ and $[B']$ take into account the coupling between two wave modes
 247 of different types, *e.g.*, a qL wave mode from E with a qT wave mode from E' .
 248 We also remark that (27) and (29) are completely symmetric with respect to E
 249 and E' .

250 Before giving one of the main results of the present work, it is worth recalling
 251 the numerical flux proposed by Käser *et al.* [3], which is expressed only in terms
 252 of material properties from the interior of the element E from one side of element
 253 interface, *i.e.*,

$$\hat{F}_n^{Käser}(U_h, U'_h) = \lambda_{n,k}^+(R_{n,k}^+ \otimes L_{n,k}^+) \cdot U_h + \lambda_{n,k}^-(R_{n,k}^- \otimes L_{n,k}^-) \cdot U'_h \quad (30)$$

254 Indeed, it would be interesting to present new terms brought by the upwind
 255 numerical fluxes proposed in the present work.

256 To obtain the upwind numerical fluxes, the linear system (26) needs to be
 257 solved. The $2d \times 2d$ matrix of the system of (26) denoted hereafter by $[R]$ will
 258 be decomposed into two parts: $[R] = [I_{2d}] + [\Delta R]$. Then the following upwind
 259 numerical fluxes are proposed:

260 **Theorem 3.2.** *According to how the inverse of $[R]$ the matrix of the system of*
 261 *(26) is approached, three upwind numerical fluxes can be defined as follows:*

262 1) *1st-order upwind numerical flux by taking $[R]^{-1} \approx [I_{2d}]$ and by remarking*
 263 *that $[R] \cdot [I_{2d}] - [I_{2d}] = [\Delta R]$*

$$\begin{aligned} \hat{F}_n(U_h, U'_h) &= \hat{F}_n^{Käser}(U_h, U'_h) \\ &\quad + \lambda_{n,k}^- ((R_{n,k}^- \otimes (L_{n,k}^- - ^*L_{n,k}^-)) \cdot U_h - (R_{n,k}^- \otimes (L_{n,k}^- - **L_{n,k}^-)) \cdot U'_h) \end{aligned} \quad (31)$$

264 2) *2nd-order upwind numerical flux by taking $[R]^{-1} \approx [I_{2d}] - [\Delta R]$ and by*
 265 *remarking that $[R] \cdot ([I_{2d}] - [\Delta R]) - [I_{2d}] = [\Delta R]^2$*

$$\begin{aligned} \hat{F}_n(U_h, U'_h) &= \hat{F}_n^{1st-order}(U_h, U'_h) \\ &\quad - \lambda_{n,k}^- \sum_{l \neq k} B_{kl} ((R_{n,k}^- \otimes **L_{n',l}^-) \cdot U_h - (R_{n,k}^- \otimes ^*L_{n',l}^-) \cdot U'_h) \end{aligned} \quad (32)$$

266 where $\hat{F}_n^{1st-order}(U_h, U'_h)$ denotes the flux defined by (31).

267 3) *Upwind numerical flux being the exact solution of the Riemann problem(21)*

$$\begin{aligned} \hat{F}_n(U_h, U'_h) &= \hat{F}_n^{1st-order}(U_h, U'_h) \\ &\quad - \lambda_{n,k}^- D_{kl} ((R_{n,k}^- \otimes ^*L_{n,l}^-) \cdot U_h - (R_{n,k}^- \otimes **L_{n,l}^-) \cdot U'_h) \\ &\quad - \lambda_{n,k}^- H_{kl} ((R_{n,k}^- \otimes **L_{n',l}^-) \cdot U_h - (R_{n,k}^- \otimes ^*L_{n',l}^-) \cdot U'_h) \end{aligned} \quad (33)$$

268 with $[D]$, $[D']$, $[H]$ and $[H']$ four $d \times d$ matrices defined by the following decom-
 269 position of the inverse matrix of $[R]$:

$$[R]^{-1} = [I_{2d}] + \begin{bmatrix} [D] & -[H] \\ -[H'] & [D'] \end{bmatrix} \quad (34)$$

270 *Proof.* It is straightforward by using the decomposition (15) of $\mathbf{A}_n$ and by
 271 substituting the solution of $\{\alpha_k\}$ in the asymmetric form of numerical flux (23b).
 272 $\square$

273 For several specific case, the following corollaries are immediate from Theo-
 274 rem 3.2:

275 **Corollary 3.2.1.** *On an element interface with continuous material properties,*
 276 *we have $[B] = [B'] = 0$, ${}^* \mathbf{L}_{n,k}^- = {}^{**} \mathbf{L}_{n,k}^- = \mathbf{L}_{n,k}^-$ and ${}^* \mathbf{L}_{n',k}^- = {}^{**} \mathbf{L}_{n',k}^- = \mathbf{L}_{n',k}^-$, so*
 277 *the characteristic coefficients $\{\alpha_k, \alpha'_k\}_{k=qL, qT_1, qT_2}$ of the Riemann problem (21)*
 278 *can be explicitly solved:*

$$\alpha_k = \mathbf{L}_{n,k}^- \cdot (\mathbf{U}_h - \mathbf{U}'_h), \quad \alpha'_k = \mathbf{L}_{n',k}^- \cdot (\mathbf{U}'_h - \mathbf{U}_h) \quad (35)$$

All the three fluxes defined in Theorem 3.2 are identical. They are all equal to
 the Käser's flux (30) and can be written as follows:

$$\hat{\mathbf{F}}_n(\mathbf{U}_h, \mathbf{U}'_h) = \hat{\mathbf{F}}_n^{Käser}(\mathbf{U}_h, \mathbf{U}'_h) \quad (36a)$$

$$= \lambda_{n,k}^+ (\mathbf{R}_{n,k}^+ \otimes \mathbf{L}_{n,k}^+) \cdot \mathbf{U}_h - \lambda_{n',k}^+ (\mathbf{R}_{n',k}^+ \otimes \mathbf{L}_{n',k}^+) \cdot \mathbf{U}'_h \quad (36b)$$

279 *Proof.* (36a) is straightforward. The symmetric form of the numerical flux (36b)
 280 can be obtained by remarking that, in the case of continuous material properties,
 281 the following equations hold (see Appendix A2):

$$\lambda'_{n',k} = \lambda_{n,k}, \quad \mathbf{R}_{n',k}^{\mp'} = -\mathbf{R}_{n,k}^{\pm}, \quad \mathbf{L}_{n',k}^{\mp'} = -\mathbf{L}_{n,k}^{\pm} \quad (37)$$

282 $\square$

283 **Corollary 3.2.2.** *On an element interface with discontinuous but isotropic ma-*
 284 *terial properties on its two sides, we have $[B] = [B'] = 0$, so the characteristic*
 285 *coefficients $\{\alpha_k, \alpha'_k\}_{k=qL, qT_1, qT_2}$ of the Riemann problem (21) can be explicitly*
 286 *solved:*

$$\alpha_k = {}^* \mathbf{L}_{n,k}^- \cdot \mathbf{U}_h - {}^{**} \mathbf{L}_{n,k}^- \cdot \mathbf{U}'_h, \quad \alpha'_k = {}^* \mathbf{L}_{n',k}^- \cdot \mathbf{U}'_h - {}^{**} \mathbf{L}_{n',k}^- \cdot \mathbf{U}_h \quad (38)$$

287 All the three fluxes defined in Theorem 3.2 are identical, and the 1st-order flux
 288 $\hat{\mathbf{F}}_n^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h)$ defined by (31) is the exact solution of the Riemann problem
 289 (21).

290 *Proof.* It is straightforward by simply recalling that in the isotropic case $\gamma_{n,qL} =$
 291 n , $\gamma_{n,qT_1} = t_1$ and $\gamma_{n,qT_2} = t_2$ $\square$

292

In the case of media with discontinuous anisotropic material properties, the sub-matrices $[B]$ and $[B']$ of $[\Delta R]$ defined by (27) are proportional to the degree of discontinuity across a physical interface. Thus, when the degree of discontinuity is sufficiently low, the 2nd-order flux, even the 1st-order flux, would be a sufficiently good numerical flux. However, when the degree of discontinuity is high, it is necessary to use the numerical flux that is the exact solution of the Riemann problem. It is worth noticing that the Käser's numerical flux (30) should be worse than the 1st-order flux (31), as it does not use the perturbed left eigenmodes $\{*\mathbf{L}_{\mathbf{n},k}^-, **\mathbf{L}_{\mathbf{n},k}^-\}$.

Finally, the most important remark concerning the numerical fluxes defined in Theorem 3.2 is that they are not physically sound in the case of media with discontinuous material properties. Indeed, on a physical interface, *i.e.* $\rho \neq \rho'$ or/and $\mathbf{\Gamma}_{\mathbf{n}} \neq \mathbf{\Gamma}'_{\mathbf{n}'}$, the interface conditions (25) derived from the equation (19c) of the Rankine–Hugoniot jump conditions (19) are not equivalent to the classical interface conditions of continuous velocity and stress vector. We recall that it has been shown in the 1D case [8] that the so-defined numerical flux was not able to give rise to physically sound wave propagation solutions.

Furthermore, the following result can be proved for the numerical flux (33) that is the exact solution of the Riemann problem:

Theorem 3.3. *The numerical flux (33) directly derived from the first-order velocity-stress system (1) is not consistent.*

Proof. To prove that a numerical flux $\hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h)$ is consistent, it should to be shown that:

$$\hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}, \mathbf{U}) = \mathbf{F}_{\mathbf{n}}(\mathbf{U}) \quad (39)$$

According to (23b), it is necessary to have, when $\mathbf{U}_h = \mathbf{U}'_h = \mathbf{U}$ and for $k = qT, qT_1, qT_2$, $\alpha_{\mathbf{n},k} = 0$. But, this does not hold in the general case, as the second member of the system of linear equations (26), becoming in this case $\{(*\mathbf{L}_{\mathbf{n},k}^- - **\mathbf{L}_{\mathbf{n},k}^-) \cdot \mathbf{U}\}, \{(*\mathbf{L}_{\mathbf{n}',k}^- - **\mathbf{L}_{\mathbf{n}',k}^-) \cdot \mathbf{U}\}$, generally does not equal to zero. In other words, if $\alpha_{\mathbf{n},k} = 0$ and $\alpha'_{\mathbf{n},k} = 0$ for $k = qT, qT_1, qT_2$ with $\mathbf{U}_h = \mathbf{U}'_h = \mathbf{U}$, (21) then results in the following equation:

$$\mathbf{A}_{\mathbf{n}}(\mathbf{U}|_E) + \mathbf{A}'_{\mathbf{n}'}(\mathbf{U}|_{E'}) = \mathbf{0} \quad (40)$$

that is equivalent to:

$$\frac{\boldsymbol{\sigma}|_E \cdot \mathbf{n}}{\rho} + \frac{\boldsymbol{\sigma}|_{E'} \cdot \mathbf{n}'}{\rho'} = \mathbf{0}, \quad \rho \mathbf{\Gamma}_{\mathbf{n}} \cdot \mathbf{v}|_E - \rho' \mathbf{\Gamma}'_{\mathbf{n}'} \cdot \mathbf{v}|_{E'} = \mathbf{0} \quad (41)$$

But (41) is generally not true when the element interface is also a physical interface. $\square$

3.2. Upwind flux based on the mechanical interface conditions

In order to remove the physical inconsistency of the interface conditions (25), they are modified in the following way to take into account the classical interface conditions, *i.e.* velocity and stress vector continuities:

$$\boldsymbol{\sigma}_h^c \cdot \mathbf{n} + \boldsymbol{\sigma}_h^{c'} \cdot \mathbf{n}' = \mathbf{0}, \quad \mathbf{v}_h^c - \mathbf{v}_h^{c'} = \mathbf{0} \quad (42)$$

Both interface conditions (25) and (42) are equivalent only in the case where the elastic moduli and the density of the propagating medium are continuous across the interface.

It is easy to show that the interface conditions (42) is in fact a consequence of the following Rankine–Hugoniot jump conditions:

$$\tilde{\mathbf{A}}_{\mathbf{n}}(\mathbf{U}_h) - \tilde{\mathbf{A}}_{\mathbf{n}}(\mathbf{U}_h^c) = \tilde{\alpha}_k \lambda_{\mathbf{n},k}^- \tilde{\mathbf{M}}(\mathbf{R}_{\mathbf{n},k}^-) \quad (43a)$$

$$\tilde{\mathbf{A}}_{\mathbf{n}}(\mathbf{U}_h^c) + \tilde{\mathbf{A}}'_{\mathbf{n}'}(\mathbf{U}_h^{c'}) = \mathbf{0} \quad (43b)$$

$$\tilde{\mathbf{A}}'_{\mathbf{n}'}(\mathbf{U}_h') - \tilde{\mathbf{A}}'_{\mathbf{n}'}(\mathbf{U}_h^{c'}) = \tilde{\alpha}'_k \lambda_{\mathbf{n}',k}^- \tilde{\mathbf{M}}'(\mathbf{R}_{\mathbf{n}',k}^-) \quad (43c)$$

which correspond to another equivalent form of the first-order velocity-stress system (1):

$$\tilde{\mathbf{M}}(\partial_t \mathbf{U}) + \tilde{\mathbf{A}}^{\partial_x}(\mathbf{U}) = \mathbf{0} \quad \text{or} \quad \begin{aligned} \rho \partial_t \mathbf{v} - \text{Div}_x \boldsymbol{\sigma} &= \mathbf{0} \\ \mathbf{C}^{-1} : \partial_t \boldsymbol{\sigma} - \boldsymbol{\varepsilon}(\mathbf{v}) &= \mathbf{0} \end{aligned} \quad (44)$$

with the following definitions of operators:

$$\tilde{\mathbf{M}} \begin{pmatrix} \mathbf{w} \\ \boldsymbol{\tau} \end{pmatrix} = \begin{pmatrix} \rho \mathbf{w} \\ \mathbf{C}^{-1} : \boldsymbol{\tau} \end{pmatrix}, \quad \tilde{\mathbf{A}}^{\partial_x} \begin{pmatrix} \mathbf{w} \\ \boldsymbol{\tau} \end{pmatrix} = \begin{pmatrix} -\text{Div}_x \boldsymbol{\tau} \\ -\boldsymbol{\varepsilon}(\mathbf{w}) \end{pmatrix}, \quad \tilde{\mathbf{A}}_{\mathbf{n}} \begin{pmatrix} \mathbf{w} \\ \boldsymbol{\tau} \end{pmatrix} = \begin{pmatrix} -\boldsymbol{\tau} \cdot \mathbf{n} \\ -\mathbf{n} \otimes_s \mathbf{w} \end{pmatrix} \quad (45)$$

We note that the following equations hold:

$$\tilde{\mathbf{M}}(\mathbf{R}_{\mathbf{n},k}) = \rho \mathbf{L}_{\mathbf{n},k}, \quad \tilde{\mathbf{A}}_{\mathbf{n}} = \tilde{\mathbf{M}} \cdot \mathbf{A}_{\mathbf{n}} = z_{\mathbf{n},k}^{\pm} \mathbf{L}_{\mathbf{n},k}^{\pm} \otimes \mathbf{L}_{\mathbf{n},k}^{\pm} \quad (46)$$

When the characteristic coefficients $\{\tilde{\alpha}_k, \tilde{\alpha}'_k\}_{k=qL, qT_1, qT_2}$ are calculated, the upwind numerical fluxes to be used for the first-order velocity-stress strong form (44) can be defined in the same way as in the preceding section, by taking into account (43a):

$$\hat{\tilde{\mathbf{F}}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}_h') = \tilde{\mathbf{A}}_{\mathbf{n}}(\mathbf{U}_h^c) = \tilde{\mathbf{A}}_{\mathbf{n}}(\mathbf{U}_h) - \tilde{\alpha}_k z_{\mathbf{n},k}^- \mathbf{L}_{\mathbf{n},k}^- \quad (47)$$

However, it is also possible to keep using the variational formulation (9) of the first-order velocity-stress strong form (1) instead of the corresponding variational formulation of (44). In this case, by taking into account (46), the equation to define upwind numerical fluxes reads as:

$$\hat{\tilde{\mathbf{F}}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}_h') = \tilde{\mathbf{M}}^{-1} \cdot \hat{\tilde{\mathbf{F}}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}_h') = \mathbf{A}_{\mathbf{n}}(\mathbf{U}_h) - \tilde{\alpha}_k \lambda_{\mathbf{n},k}^- \mathbf{R}_{\mathbf{n},k}^- \quad (48)$$

It should be noted that both choices, the strong form (1) with the numerical flux (47) or the strong form (44) with the numerical flux (48), are equivalent, and their numerical implementations give rise to identical results, which is confirmed by our numerical investigation. Moreover, we notice that $\hat{\tilde{\mathbf{F}}}_{\mathbf{n}'}(\mathbf{U}_h', \mathbf{U}_h) \neq -\hat{\tilde{\mathbf{F}}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}_h')$, even if the numerical flux (47) is conservative, *i.e.*, $\hat{\tilde{\mathbf{F}}}_{\mathbf{n}'}(\mathbf{U}_h', \mathbf{U}_h) = -\hat{\tilde{\mathbf{F}}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}_h')$.

To solve the Riemann problem (43), the same technique presented in the preceding section is used, and the following result concerning the mechanically based Riemann problem can be proved:

Theorem 3.4. The characteristic coefficients $\{\tilde{\alpha}_k, \tilde{\alpha}'_k\}_{k=qL, qT_1, qT_2}$ of the Riemann problem (43) are the solution of the following linear system of equations:

$$\begin{bmatrix} [I_d] & [\tilde{B}] \\ [\tilde{B}'] & [I_d] \end{bmatrix} \cdot \begin{pmatrix} \{\tilde{\alpha}_k\} \\ \{\tilde{\alpha}'_k\} \end{pmatrix} = \begin{pmatrix} \{\tilde{\mathbf{L}}_{\mathbf{n},k}^- \cdot (\mathbf{U}_h - \mathbf{U}'_h)\} \\ \{\tilde{\mathbf{L}}_{\mathbf{n}',k}^{-'} \cdot (\mathbf{U}'_h - \mathbf{U}_h)\} \end{pmatrix} \quad (49)$$

In (49), $[I_d]$ is the $d \times d$ identity matrix and $[\tilde{B}]$ and $[\tilde{B}']$ are $d \times d$ matrices with zero diagonal terms and the following extra-diagonal terms:

$$\tilde{B}_{kl,k \neq l} = -\frac{C_{z,k}^-}{2} \frac{\delta z_{\mathbf{n}',kl}^{-'}}{z_{\mathbf{n}',k}^{-'}} \gamma_{\mathbf{n},k} \cdot \gamma'_{\mathbf{n}',l}, \quad \tilde{B}'_{kl,k \neq l} = -\frac{C_{z,k}^{-'}}{2} \frac{\delta z_{\mathbf{n},kl}^-}{z_{\mathbf{n},k}^-} \gamma'_{\mathbf{n}',k} \cdot \gamma_{\mathbf{n},l} \quad (50)$$

where $C_{z,k}^-$, $C_{z,k}^{-'}$, $\delta z_{\mathbf{n}',kl}^{-'}$ and $\delta z_{\mathbf{n},kl}^-$ are defined in Theorem 3.1. $\{\tilde{\mathbf{L}}_{\mathbf{n},k}^-, \tilde{\mathbf{L}}_{\mathbf{n}',k}^{-'}\}$ are the perturbed left eigenmodes of $\{\mathbf{A}_{\mathbf{n}}, \mathbf{A}'_{\mathbf{n}'}\}$ calculated by using the material properties of the adjacent element in the following way:

$$\tilde{\mathbf{L}}_{\mathbf{n},k}^- = \begin{pmatrix} C_{z,k}^- \boldsymbol{\wp}_{vect}(\mathbf{L}_{\mathbf{n},k}^-) \\ C_{z,k}^{-'} \boldsymbol{\wp}_{tens}(\mathbf{L}_{\mathbf{n},k}^-) \end{pmatrix}, \quad \tilde{\mathbf{L}}_{\mathbf{n}',k}^{-'} = \begin{pmatrix} C_{z,k}^{-'} \boldsymbol{\wp}_{vect}(\mathbf{L}_{\mathbf{n}',k}^{-'}) \\ C_{z,k}^- \boldsymbol{\wp}_{tens}(\mathbf{L}_{\mathbf{n}',k}^{-'}) \end{pmatrix} \quad (51)$$

Proof. See Appendix A3. $\square$

As in the preceding section, by decomposing the $2d \times 2d$ matrix of the system of linear equations (49) as $[\tilde{R}] = [I_{2d}] + [\Delta \tilde{R}]$, the following upwind numerical fluxes are proposed:

Theorem 3.5. According to how the inverse of $[\tilde{R}]$ the matrix of the system of (49) is approached, three upwind numerical fluxes can be defined as follows:

1) 1st-order upwind numerical flux by taking $[\tilde{R}]^{-1} \approx [I_{2d}]$ and by remarking that $[\tilde{R}] \cdot [I_{2d}] - [I_{2d}] = [\Delta \tilde{R}]$

$$\hat{\tilde{\mathbf{F}}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h) = \tilde{\mathbf{M}}(\hat{\mathbf{F}}_{\mathbf{n}}^{K\ddot{a}ser}(\mathbf{U}_h, \mathbf{U}'_h)) + z_{\mathbf{n},k}^- (\mathbf{L}_{\mathbf{n},k}^- \otimes (\mathbf{L}_{\mathbf{n},k}^- - \tilde{\mathbf{L}}_{\mathbf{n},k}^-)) \cdot (\mathbf{U}_h - \mathbf{U}'_h) \quad (52a)$$

$$\hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h) = \hat{\mathbf{F}}_{\mathbf{n}}^{K\ddot{a}ser}(\mathbf{U}_h, \mathbf{U}'_h) + \lambda_{\mathbf{n},k}^- (\mathbf{R}_{\mathbf{n},k}^- \otimes (\mathbf{L}_{\mathbf{n},k}^- - \tilde{\mathbf{L}}_{\mathbf{n},k}^-)) \cdot (\mathbf{U}_h - \mathbf{U}'_h) \quad (52b)$$

2) 2nd-order upwind numerical flux by taking $[\tilde{R}]^{-1} \approx [I_{2d}] - [\Delta \tilde{R}]$ and by remarking that $[\tilde{R}] \cdot ([I_{2d}] - [\Delta \tilde{R}]) - [I_{2d}] = [\Delta \tilde{R}]^2$

$$\hat{\tilde{\mathbf{F}}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h) = \hat{\tilde{\mathbf{F}}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h) - z_{\mathbf{n},k}^- \sum_{l \neq k} \tilde{B}_{kl} (\mathbf{L}_{\mathbf{n},k}^- \otimes \tilde{\mathbf{L}}_{\mathbf{n}',l}^{-'}) \cdot (\mathbf{U}_h - \mathbf{U}'_h) \quad (53a)$$

$$\hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h) = \hat{\mathbf{F}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h) - \lambda_{\mathbf{n},k}^- \sum_{l \neq k} \tilde{B}_{kl} (\mathbf{R}_{\mathbf{n},k}^- \otimes \tilde{\mathbf{L}}_{\mathbf{n}',l}^{-'}) \cdot (\mathbf{U}_h - \mathbf{U}'_h) \quad (53b)$$

where $\hat{\mathbf{F}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h)$ and $\hat{\mathbf{F}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h)$ denote the fluxes defined respectively by (52a) and (52b).

3) Upwind numerical flux being the exact solution of the Riemann problem (43)

$$\hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h) = \hat{\mathbf{F}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h) - z_{\mathbf{n},k}^- \mathbf{L}_{\mathbf{n},k}^- \otimes (\tilde{D}_{kl} \tilde{\mathbf{L}}_{\mathbf{n},l}^- + \tilde{H}_{kl} \tilde{\mathbf{L}}_{\mathbf{n}',l}^-) \cdot (\mathbf{U}_h - \mathbf{U}'_h) \quad (54a)$$

$$\hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h) = \hat{\mathbf{F}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h) - \lambda_{\mathbf{n},k}^- \mathbf{R}_{\mathbf{n},k}^- \otimes (\tilde{D}_{kl} \tilde{\mathbf{L}}_{\mathbf{n},l}^- + \tilde{H}_{kl} \tilde{\mathbf{L}}_{\mathbf{n}',l}^-) \cdot (\mathbf{U}_h - \mathbf{U}'_h) \quad (54b)$$

366 with $[\tilde{D}]$, $[\tilde{D}']$, $[\tilde{H}]$ and $[\tilde{H}']$ four $d \times d$ matrices defined by the following decom-
367 position of the inverse matrix of $[\tilde{R}]$:

$$[\tilde{R}]^{-1} = [I_{2d}] + \begin{bmatrix} [\tilde{D}] & -[\tilde{H}] \\ -[\tilde{H}'] & [\tilde{D}'] \end{bmatrix} \quad (55)$$

368 *Proof.* It is straightforward by using the decomposition (15) of $\mathbf{A}_{\mathbf{n}}$ and the
369 equations given by (46), and by substituting the solution of $\{\tilde{\alpha}_k\}$ in the equa-
370 tions of numerical fluxes (47) and (48). $\square$

371

372 As in the preceding section, the following corollaries can be proved for several
373 specific cases:

374 **Corollary 3.5.1.** *On an element interface with continuous material properties,*
375 *we have $[\tilde{B}] = [\tilde{B}'] = 0$, $\tilde{\mathbf{L}}_{\mathbf{n},k}^- = \mathbf{L}_{\mathbf{n},k}^-$ and $\tilde{\mathbf{L}}_{\mathbf{n}',k}^- = \mathbf{L}_{\mathbf{n}',k}^-$, so the characteristic*
376 *coefficients $\{\tilde{\alpha}_k, \tilde{\alpha}'_k\}_{k=qL,qT_1,qT_2}$ of the Riemann problem (43) can be explicitly*
377 *solved:*

$$\tilde{\alpha}_k = \mathbf{L}_{\mathbf{n},k}^- \cdot (\mathbf{U}_h - \mathbf{U}'_h), \quad \tilde{\alpha}'_k = \mathbf{L}_{\mathbf{n}',k}^- \cdot (\mathbf{U}'_h - \mathbf{U}_h) \quad (56)$$

378 *All the three fluxes defined in Theorem 3.5 are identical. They are equivalent to*
379 *the one defined by (36) in Corollary 3.2.1.*

380 **Corollary 3.5.2.** *On an element interface with discontinuous but isotropic ma-*
381 *terial properties on its two sides, we have $[\tilde{B}] = [\tilde{B}'] = 0$, so the characteristic*
382 *coefficients $\{\tilde{\alpha}_k, \tilde{\alpha}'_k\}_{k=qL,qT_1,qT_2}$ of the Riemann problem (43) can be explicitly*
383 *solved:*

$$\tilde{\alpha}_k = \tilde{\mathbf{L}}_{\mathbf{n},k}^- \cdot (\mathbf{U}_h - \mathbf{U}'_h), \quad \tilde{\alpha}'_k = \tilde{\mathbf{L}}_{\mathbf{n}',k}^- \cdot (\mathbf{U}'_h - \mathbf{U}_h) \quad (57)$$

384 *All the three fluxes defined in Theorem 3.5 are identical, and the 1st-order flux*
385 *$\hat{\mathbf{F}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h)$ defined by (52a) is the exact solution of the Riemann prob-*
386 *lem (43).*

387 Concerning the consistency of the numerical flux (54) that is the exact so-
388 lution of the Riemann problem, the following result can be proved.

389 **Theorem 3.6.** *The numerical flux (54) based on the mechanical interface con-*
390 *ditions and corresponding to the first-order velocity-stress system (44) is con-*
391 *sistent.*

392 *Proof.* As the second member of the system of linear equations (49) is equal to
 393 zero with $\mathbf{U}_h = \mathbf{U}'_h = \mathbf{U}$, hence, we have $\tilde{\alpha}_{\mathbf{n},k} = \tilde{\alpha}'_{\mathbf{n},k} = 0$ for $k = qT, qT_1, qT_2$.
 394 Then, according to (47) and (48), we get $\hat{\tilde{\mathbf{F}}}_{\mathbf{n}}(\mathbf{U}, \mathbf{U}) = \tilde{\mathbf{F}}_{\mathbf{n}}(\mathbf{U})$ and $\hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}, \mathbf{U}) =$
 395 $\mathbf{F}_{\mathbf{n}}(\mathbf{U})$. $\square$

396 4. Upwind numerical fluxes for the first-order velocity-strain system

397 In this section, we apply the approach developed in the preceding section
 398 to the first-order velocity-strain wave equations defined in Section 2.2. In [6],
 399 an upwind numerical flux that is exact solution of the Riemann problem was
 400 developed in the case of isotropic heterogeneous media with discontinuous elastic
 401 moduli and density. Hereafter, the more general case of anisotropic media is
 402 considered. Firstly, the elastic wave oriented eigenanalysis is applied to the first-
 403 order velocity-strain waves equations (11). Secondly, the Riemann problem is
 404 defined and solved to develop upwind numerical fluxes.

405 4.1. Elastic wave oriented eigenanalysis of the first-order $\mathbf{v}$ - $\boldsymbol{\varepsilon}$ system (11)

406 As in the case of the first-order velocity-stress system, before giving the
 407 definition of the Riemann problem at an element interface, eigenanalysis of
 408 the first-order velocity-strain system (11) is performed, *i.e.*, the solving of the
 409 following eigenproblem:

$$\mathbf{A}_{\mathbf{n}}(\mathbf{R}_{\mathbf{n},k}) = \lambda_{\mathbf{n},k} \mathbf{M}(\mathbf{R}_{\mathbf{n},k}), \quad \mathbf{A}_{\mathbf{n}}^T(\mathbf{L}_{\mathbf{n},k}) = \lambda_{\mathbf{n},k} \mathbf{M}(\mathbf{L}_{\mathbf{n},k}) \quad (58)$$

410 with $\mathbf{A}_{\mathbf{n}}$ and $\mathbf{M}$ defined respectively in (13) and (12). The following results
 411 can be proved.

412 Among the $m = d + d(d+1)/2$ eigenvalues of the eigensystem (58), there are
 413 d strictly negative eigenvalues $(\lambda_{\mathbf{n},k}^- = -c_{\mathbf{n},k})_{k=qL, \{qT_{\alpha}\}_{\alpha=1, \dots, d-1}}$ and d strictly
 414 positive eigenvalues $(\lambda_{\mathbf{n},k}^+ = c_{\mathbf{n},k})_{k=qL, \{qT_{\alpha}\}_{\alpha=1, \dots, d-1}}$, $c_{\mathbf{n},qL}$ and $c_{\mathbf{n},qT_{\alpha}}$ being
 415 respectively the velocity of quasi longitudinal and quasi transverse wave modes
 416 propagating in the $\mathbf{n}$ direction. The right and left eigenmodes corresponding to
 417 these nonzero eigenvalues are: $\forall k = qL, \{qT_{\alpha}\}_{\alpha=1, \dots, d-1}$

$$\mathbf{R}_{\mathbf{n},k}^{\pm} = \begin{pmatrix} \mathbf{w}_{\mathbf{n},k} \\ -\rho(z_{\mathbf{n},k}^{\pm})^{-1} \mathbf{n} \otimes_s \mathbf{w}_{\mathbf{n},k} \end{pmatrix}, \quad \mathbf{L}_{\mathbf{n},k}^{\pm} = \rho^{-1} \begin{pmatrix} \mathbf{w}_{\mathbf{n},k} \\ -\rho(z_{\mathbf{n},k}^{\pm})^{-1} \mathbf{C} : (\mathbf{n} \otimes_s \mathbf{w}_{\mathbf{n},k}) \end{pmatrix} \quad (59)$$

418 As in the previous case of the first-order velocity-stress system, $\mathbf{w}_{\mathbf{n},k} = \frac{1}{\sqrt{2}} \boldsymbol{\gamma}_{\mathbf{n},k}$,
 419 with $(\boldsymbol{\gamma}_{\mathbf{n},k})_{k=qL, \{qT_{\alpha}\}_{\alpha=1, \dots, d-1}}$ the unit eigenvectors of the Christoffel tensor $\boldsymbol{\Gamma}_{\mathbf{n}}$.
 420 It can be shown that the following orthonormality relation holds between the
 421 two right and left eigenbases:

$$\mathbf{R}_{\mathbf{n},k} \cdot \mathbf{M}(\mathbf{L}_{\mathbf{n},l}) = \delta_{kl}, \quad \forall k, l = 1, \dots, m \quad (60)$$

422 where δ_{kl} denotes the usual Kronecker delta. Hence, using its two eigenbases, the
 423 normal Jacobian operator $\mathbf{A}_{\mathbf{n}}$ defined by (13) of the first-order velocity-strain
 424 wave equations (11) can be decomposed as follows:

$$\mathbf{A}_{\mathbf{n}} = \lambda_{\mathbf{n},k}^- \mathbf{M}(\mathbf{R}_{\mathbf{n},k}^-) \otimes \mathbf{M}(\mathbf{L}_{\mathbf{n},k}^-) + \lambda_{\mathbf{n},k}^+ \mathbf{M}(\mathbf{R}_{\mathbf{n},k}^+) \otimes \mathbf{M}(\mathbf{L}_{\mathbf{n},k}^+) \quad (61)$$

4.2. Upwind numerical fluxes

In the 3D case, the Riemann problem corresponding to the first-order velocity-strain equations (11), *i.e.*, the Rankine-Hugoniot jump conditions across an element interface (Figure 1), reads as:

$$\mathbf{A}_n(\mathbf{U}_h) - \mathbf{A}_n(\mathbf{U}_h^c) = \alpha_k \lambda_{n,k}^- \mathbf{M}(\mathbf{R}_{n,k}^-) \quad (62a)$$

$$\mathbf{A}_n(\mathbf{U}_h^c) + \mathbf{A}'_{n'}(\mathbf{U}_h^{c'}) = \mathbf{0} \quad (62b)$$

$$\mathbf{A}'_{n'}(\mathbf{U}_h') - \mathbf{A}'_{n'}(\mathbf{U}_h^{c'}) = \alpha'_k \lambda_{n',k}^{-'} \mathbf{M}'(\mathbf{R}_{n',k}^{-'}) \quad (62c)$$

(62b) gives rise to the following interface conditions that are clearly physically sound:

$$(\mathbf{C} : \boldsymbol{\varepsilon}_h^c) \cdot \mathbf{n} + (\mathbf{C}' : \boldsymbol{\varepsilon}_h^{c'}) \cdot \mathbf{n}' = \mathbf{0}, \quad \mathbf{v}_h^c - \mathbf{v}_h^{c'} = \mathbf{0} \quad (63)$$

When the characteristic coefficients $\{\alpha_k, \alpha'_k\}_{k=qL, qT_1, qT_2}$ are calculated, upwind numerical fluxes can be defined in the same way as in the preceding section, by taking into account (62a):

$$\hat{\mathbf{F}}_n(\mathbf{U}_h, \mathbf{U}_h') = \mathbf{A}_n(\mathbf{U}_h^c) = \mathbf{A}_n(\mathbf{U}_h) - \alpha_{n,k} \lambda_{n,k}^- \mathbf{M}(\mathbf{R}_{n,k}^-) \quad (64)$$

When the Riemann problem is exactly solved by the numerical flux, the latter is conservative, as we have, due to (62b), $\hat{\mathbf{F}}_{n'}(\mathbf{U}_h', \mathbf{U}_h) = -\hat{\mathbf{F}}_n(\mathbf{U}_h, \mathbf{U}_h')$.

To solve the Riemann problem (62), the same technique presented in the preceding section is used, and the following result can be proved:

Theorem 4.1. *The characteristic coefficients $\{\alpha_k, \alpha'_k\}_{k=qL, qT_1, qT_2}$ of the Riemann problem (62) are the solution of the following linear system of equations:*

$$\begin{bmatrix} [I_d] & [\tilde{B}] \\ [\tilde{B}'] & [I_d] \end{bmatrix} \cdot \begin{pmatrix} \{\alpha_k\} \\ \{\alpha'_k\} \end{pmatrix} = \begin{pmatrix} \{\mathbf{M}(\mathbf{L}_{n,k}^-) \cdot (\mathbf{U}_h - \mathbf{U}_h')\} \\ \{\mathbf{M}'(\mathbf{L}_{n',k}^{-'}) \cdot (\mathbf{U}_h' - \mathbf{U}_h)\} \end{pmatrix} \quad (65)$$

In (65), $[I_d]$ is the $d \times d$ identity matrix and $[\tilde{B}]$ and $[\tilde{B}']$ are the two $d \times d$ matrices already defined in Theorem 3.4. The operators $\mathbf{M}$ and $\mathbf{M}'$ are defined in (12). $\{\mathbf{L}_{n,k}^-, \mathbf{L}_{n',k}^{-'}\}$ are the perturbed left eigenmodes of the eigensystem (58) calculated by using the material properties of the adjacent element in the following way:

$${}^*\mathbf{L}_{n,k}^- = \begin{pmatrix} C_{z,k}^- \boldsymbol{\varphi}_{vect}(\mathbf{L}_{n,k}^-) \\ C_{z,k}^{-'} \boldsymbol{\varphi}_{tens}(\mathbf{L}_{n,k}^-) \end{pmatrix}, \quad {}^*\mathbf{L}_{n',k}^{-'} = \begin{pmatrix} C_{z,k}^{-'} \boldsymbol{\varphi}_{vect}(\mathbf{L}_{n',k}^{-'}) \\ C_{z,k}^- \boldsymbol{\varphi}_{tens}(\mathbf{L}_{n',k}^{-'}) \end{pmatrix} \quad (66)$$

Proof. See Appendix A4. □

We remark that, on the one side, both systems of linear equations (49) of Theorem 3.4 and (65) of Theorem 4.1 have the same $2d \times 2d$ matrix $[\tilde{R}]$, and on the other hand, the equation (66) has the same form as the equation (51) but applies to the left eigenmodes defined by (59).

As in the preceding section, by decomposing $[\tilde{R}]$ into $[I_{2d}] + [\Delta \tilde{R}]$, the following upwind numerical fluxes are proposed:

451 **Theorem 4.2.** According to how the inverse of $[\tilde{R}]$ the matrix of the system of
 452 (65) is approached, three upwind numerical fluxes can be defined as follows:
 453 1) 1st-order upwind numerical flux by taking $[\tilde{R}]^{-1} \approx [I_{2d}]$ and by remarking
 454 that $[\tilde{R}].[I_{2d}] - [I_{2d}] = [\Delta\tilde{R}]$

$$\begin{aligned} \hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h) &= \lambda_{\mathbf{n},k}^+(M(\mathbf{R}_{\mathbf{n},k}^+) \otimes M(\mathbf{L}_{\mathbf{n},k}^+)) \cdot \mathbf{U}_h + \lambda_{\mathbf{n},k}^-(M(\mathbf{R}_{\mathbf{n},k}^-) \otimes M(\mathbf{L}_{\mathbf{n},k}^-)) \cdot \mathbf{U}'_h \\ &\quad + \lambda_{\mathbf{n},k}^-(M(\mathbf{R}_{\mathbf{n},k}^-) \otimes M(\mathbf{L}_{\mathbf{n},k}^- - {}^*\mathbf{L}_{\mathbf{n},k}^-)) \cdot (\mathbf{U}_h - \mathbf{U}'_h) \end{aligned} \quad (67)$$

455 2) 2nd-order upwind numerical flux by taking $[\tilde{R}]^{-1} \approx [I_{2d}] - [\Delta\tilde{R}]$ and by
 456 remarking that $[\tilde{R}].([I_{2d}] - [\Delta\tilde{R}]) - [I_{2d}] = [\Delta\tilde{R}]^2$

$$\hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h) = \hat{\mathbf{F}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h) - \lambda_{\mathbf{n},k}^- \sum_{l \neq k} \tilde{B}_{kl} (M(\mathbf{R}_{\mathbf{n},k}^-) \otimes M({}^*\mathbf{L}_{\mathbf{n}',l}^-)) \cdot (\mathbf{U}_h - \mathbf{U}'_h) \quad (68)$$

457 where $\hat{\mathbf{F}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h)$ denotes the flux defined by (67).

458 3) Upwind numerical flux being the exact solution of the Riemann problem (62)

$$\begin{aligned} \hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h) &= \hat{\mathbf{F}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h) \\ &\quad - \lambda_{\mathbf{n},k}^- M(\mathbf{R}_{\mathbf{n},k}^-) \otimes (\tilde{D}_{kl} M({}^*\mathbf{L}_{\mathbf{n},l}^-) + \tilde{H}_{kl} M({}^*\mathbf{L}_{\mathbf{n}',l}^-)) \cdot (\mathbf{U}_h - \mathbf{U}'_h) \end{aligned} \quad (69)$$

459 with $[\tilde{D}]$, $[\tilde{D}']$, $[\tilde{H}]$ and $[\tilde{H}']$ four $d \times d$ matrices already defined in Theorem 3.4.

460 *Proof.* It is straightforward by using the decomposition (61) of $\mathbf{A}_{\mathbf{n}}$ and by sub-
 461 stituting the solution of $\{\alpha_k\}$ in the equation of numerical flux (64). $\square$

462

463 As in the preceding section, the following corollaries can be proved for several
 464 specific cases:

465 **Corollary 4.2.1.** On an element interface with continuous material properties,
 466 we have $[\tilde{B}] = [\tilde{B}'] = 0$, ${}^*\mathbf{L}_{\mathbf{n},k}^- = \mathbf{L}_{\mathbf{n},k}^-$ and ${}^*\mathbf{L}_{\mathbf{n}',k}^- = \mathbf{L}_{\mathbf{n}',k}^-$, so the characteristic
 467 coefficients $\{\alpha_k, \alpha'_k\}_{k=qL, qT_1, qT_2}$ of the Riemann problem (62) can be explicitly
 468 solved:

$$\alpha_k = M(\mathbf{L}_{\mathbf{n},k}^-) \cdot (\mathbf{U}_h - \mathbf{U}'_h), \quad \alpha'_k = M'(\mathbf{L}_{\mathbf{n}',k}^-) \cdot (\mathbf{U}'_h - \mathbf{U}_h) \quad (70)$$

All the three fluxes defined in Theorem 4.2 are identical and can be written as follows:

$$\hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}_h, \mathbf{U}'_h) = \lambda_{\mathbf{n},k}^+(M(\mathbf{R}_{\mathbf{n},k}^+) \otimes M(\mathbf{L}_{\mathbf{n},k}^+)) \cdot \mathbf{U}_h + \lambda_{\mathbf{n},k}^-(M(\mathbf{R}_{\mathbf{n},k}^-) \otimes M(\mathbf{L}_{\mathbf{n},k}^-)) \cdot \mathbf{U}'_h \quad (71a)$$

$$= \lambda_{\mathbf{n},k}^+(M(\mathbf{R}_{\mathbf{n},k}^+) \otimes M(\mathbf{L}_{\mathbf{n},k}^+)) \cdot \mathbf{U}_h - \lambda_{\mathbf{n}',k}^+(M'(\mathbf{R}_{\mathbf{n}',k}^+) \otimes M'(\mathbf{L}_{\mathbf{n}',k}^+)) \cdot \mathbf{U}'_h \quad (71b)$$

469 **Corollary 4.2.2.** On an element interface with discontinuous but isotropic ma-
 470 terial properties on its two sides, we have $[\tilde{B}] = [\tilde{B}'] = 0$, so the characteristic

471 coefficients $\{\tilde{\alpha}_k, \tilde{\alpha}'_k\}_{k=qL, qT_1, qT_2}$ of the Riemann problem (62) can be explicitly
 472 solved:

$$\alpha_k = \mathbf{M}(\mathbf{L}_{\mathbf{n},k}^-) \cdot (\mathbf{U}_h - \mathbf{U}'_h), \quad \alpha'_k = \mathbf{M}'(\mathbf{L}_{\mathbf{n}',k}^-) \cdot (\mathbf{U}'_h - \mathbf{U}_h) \quad (72)$$

473 All the three fluxes defined in Theorem 4.2 are identical, and the 1st-order flux
 474 $\hat{\mathbf{F}}_{\mathbf{n}}^{1st-order}(\mathbf{U}_h, \mathbf{U}'_h)$ defined by (67) is the exact solution of the Riemann problem
 475 (62).

476 We remark that the case of Corollary 4.2.2 was treated by Wilcox *et al.*
 477 in [6]. Our equation of numerical flux (67) is more compact and highlights the
 478 important role played by the gap between the acoustic impedances on both sides
 479 of element interfaces.

480 Concerning the consistency of the numerical flux (54) that is the exact so-
 481 lution of the Riemann problem, the following result can be proved.

482 **Theorem 4.3.** *The numerical flux (69) of the first-order velocity-strain system*
 483 *(11) is consistent.*

484 *Proof.* The second member of the system of linear equations (65) is equal to
 485 zero, so $\alpha_{\mathbf{n},k} = \alpha'_{\mathbf{n},k} = 0$ for $k = qT, qT_1, qT_2$. Then, according to (64), we get
 486 $\hat{\mathbf{F}}_{\mathbf{n}}(\mathbf{U}, \mathbf{U}) = \mathbf{F}_{\mathbf{n}}(\mathbf{U})$. $\square$

487 5. Numerical investigations of the numerical fluxes

488 The objectif of this section is to numerically validate the numerical fluxes
 489 proposed in the present work, especially the one solving exactly the Riemann
 490 problem and giving rise to the appropriate mechanical interface conditions ((54)
 491 in Section 3.2), which is named “MG_sDG” hereafter.

492 In the present work, the time domain solving of the variational dG formu-
 493 lation (9b) is done by using the standard four-stage fourth-order Runge-Kutta
 494 iterative method, which is only conditionally stable. According to [16], the
 495 following stability condition written in the general context of anisotropic and
 496 piecewise homogeneous media should be satisfied:

$$\Delta t_{sDG} \leq \frac{CFL_{sDG}}{2N_p + 1} \min_E \left\{ \frac{h^E}{\max_{\mathbf{n}} \{c_{\mathbf{n},L}^E\}} \right\} \quad (73)$$

497 with N_p the order of the FE basis function, h^E the size of the element E and
 498 CFL_{sDG} the Courant-Friedrichs-Levy number. For the numerical examples
 499 presented hereafter, FE meshes with four-node quadrilateral (Q4) elements are
 500 systematically used. Hence, we have $N_p = 1$. The constant CFL_{sDG} depends
 501 on the order of FE basis function, the space dimension d ($d = 1, 2, 3$), as well as
 502 the shape of finite element. According to our numerical experiences, $CFL_{sDG} =$
 503 0.6 always works in the 2D case with $N_p = 1$, *i.e.*, for three-node triangular
 504 (T3) elements or Q4 elements.

505 The element size h^E should be chosen by considering the shortest wavelength
 506 of interest, which is, in turn, defined by the highest frequency of interest often
 507 determined by the frequency content of external loadings. For the numerical
 508 examples presented hereafter, ricker signals are used to define the dependency
 509 of the external loadings upon the time t , *i.e.*:

$$g(\mathbf{x}, t) = a_g(\mathbf{x}) \left(1 - 2 \left(\frac{2\pi(t - T_r/2)}{T_r} \right)^2 \right) e^{-\left(\frac{2\pi(t - T_r/2)}{T_r} \right)^2} \quad (74)$$

510 with T_r the period of the ricker signal. The advantage of using a ricker signal
 511 is to have a perfectly controlled frequency range with a central frequency equal
 512 to $f_{max} = 2T_r^{-1}$ and a cutoff frequency that can be reasonably taken equal to
 513 $f_c = 2.5f_{max}$. In the present work, the highest frequency of interest is chosen
 514 equal to f_c , and the associated shortest wavelength of quasi transverse waves is
 515 used to define the element size h^E .

516 Numerical results obtained with the use of the flux “MG_sDG” are compared
 517 to the reference numerical solutions calculated by using a time discontinuous
 518 space-time Galerkin solver (named “tDG” hereafter). The basic idea of this time
 519 discontinuous space-time Galerkin method is to subdivide the studied space-time
 520 domain $\Omega \times]0, T[$ into a series of space-time slabs $\Omega \times]t_n, t_{n+1}[$ and to write in
 521 each space-time slab a variational formulation by considering both displacement
 522 and velocity unknowns. Within each space-time slab, continuous finite elements
 523 are used, but between two successive slabs, both displacement and velocity fields
 524 are discontinuous [17, 18, 19, 20]. It can be shown that the time dG method
 525 is unconditionally stable, which constitutes a real advantage. Otherwise, due
 526 to energies dissipated in time jumps between two subsequent space-time slabs,
 527 there is also a numerical damping inherent to this method that increases with the
 528 frequency and allows filtering numerical spurious noises. The time dG solver
 529 used in this work discretizes the space with a finite element mesh combined
 530 with one linear element in time for each space-time slab. It can be formulated
 531 in the form of an implicit time-stepping schemes and has been validated by our
 532 previous studies [21, 22, 20] and also by other authors [19, 23].

533 As for the definition of the time step for the time dG solver, it is necessary to
 534 take a sufficiently small time step to prevent higher frequency modes of interest
 535 from its numerical damping. The following formula is systematically applied in
 536 our work:

$$\Delta t_{tDG} = \min_E \left\{ \frac{h^E}{\max_{\mathbf{n}} \{c_{\mathbf{n},L}^E\}} \right\} \quad (75)$$

537 Therefore, for all the numerical examples presented hereafter, we have $\Delta t_{tDG} =$
 538 $5\Delta t_{sDG}$, when a same element size h^E is used.

539 5.1. Heterogeneous bimaterial case with anisotropic/isotropic materials

540 The first example was the one already calculated by Komatitsch *et al.*
 541 [24] and de la Puente *et al.* [5]. A square domain $\Omega =]-0.325, 0.325[\times]-$
 542 $0.325, 0.325[\text{m}^2$ composed of two materials is considered. The two materials are

separated by the axis $x_1 = 0$: the one on the left is an anisotropic (transversely isotropic) zinc crystal, and the one on the right is isotropic. Their material properties are given in Table I. We remark that, for the transversely isotropic material, the symmetry axis is in the x_2 -direction. For the anisotropic material, wave velocities and wave fronts are analytically calculated by considering the anisotropic elastic tensor, and they are shown in Figure 2. Free boundary conditions are applied on $\partial\Omega$.

	C_{1111} (GPa)	C_{1122} (GPa)	C_{2222} (GPa)	C_{1212} (GPa)	ρ (kg m $^{-3}$)
<i>isotropic</i>	165	85.8	165	39.6	7100
<i>anisotropic</i>	165	50	62	39.6	7100

Table I: Material properties of the isotropic and anisotropic materials of the bimaterial example

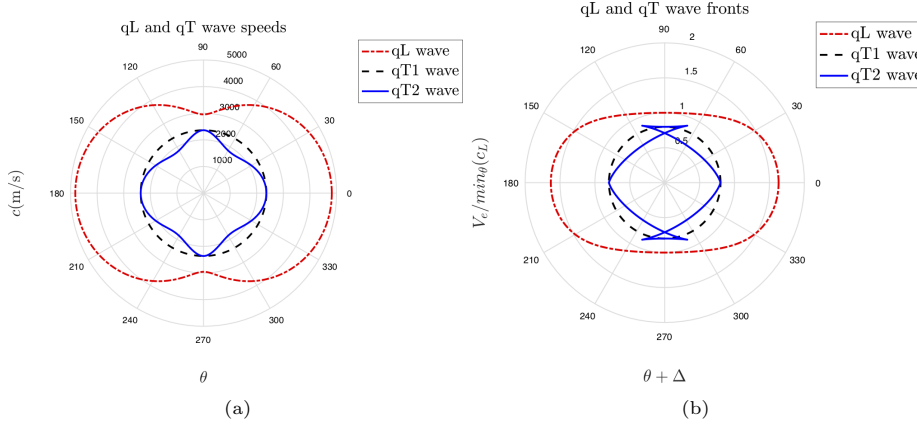


Figure 2: (a) Wave velocities, and (b) Waves fronts, of the anisotropic material (only curves in red blue are to be considered in the 2D problem defined in the Ox_1x_2 plan).

Not like in the works [24, 5], where the case of a point force acting in the x_2 -direction at location $(-0.02, 0.)$ m was considered, a force acting in the x_1 -direction and defined on a segment between two points $(-0.02125, 0.)$ m and $(-0.01875, 0.)$ m is herein applied. The force as a time function is a ricker signal with a central frequency $f_{max} = 170$ kHz and a cutoff frequency $f_c = 425$ kHz. Corresponding to the cutoff frequency, the shortest wavelength (of quasi transverse waves) is equal to 4.3mm. Two element sizes, $h_1^E = 1$ mm and $h_2^E = 0.5$ mm, are used here. For the “tDG” solver, the time steps used for these two mesh sizes are respectively $\Delta t_{tDG,1} = 200$ ns and $\Delta t_{tDG,2} = 100$ ns, while, for the “sDG” solver, they are respectively $\Delta t_{sDG,1} = 40$ ns and $\Delta t_{sDG,2} = 20$ ns. The total simulation time is $T = 100\mu$ s.

Firstly, four snapshots of evolving quasi longitudinal and quai transverse wave fronts are presented in Figure 3 for a qualitative comparison with the analytically calculated fronts (Figure 2(a)) and the numerical results presented in [24, 5].

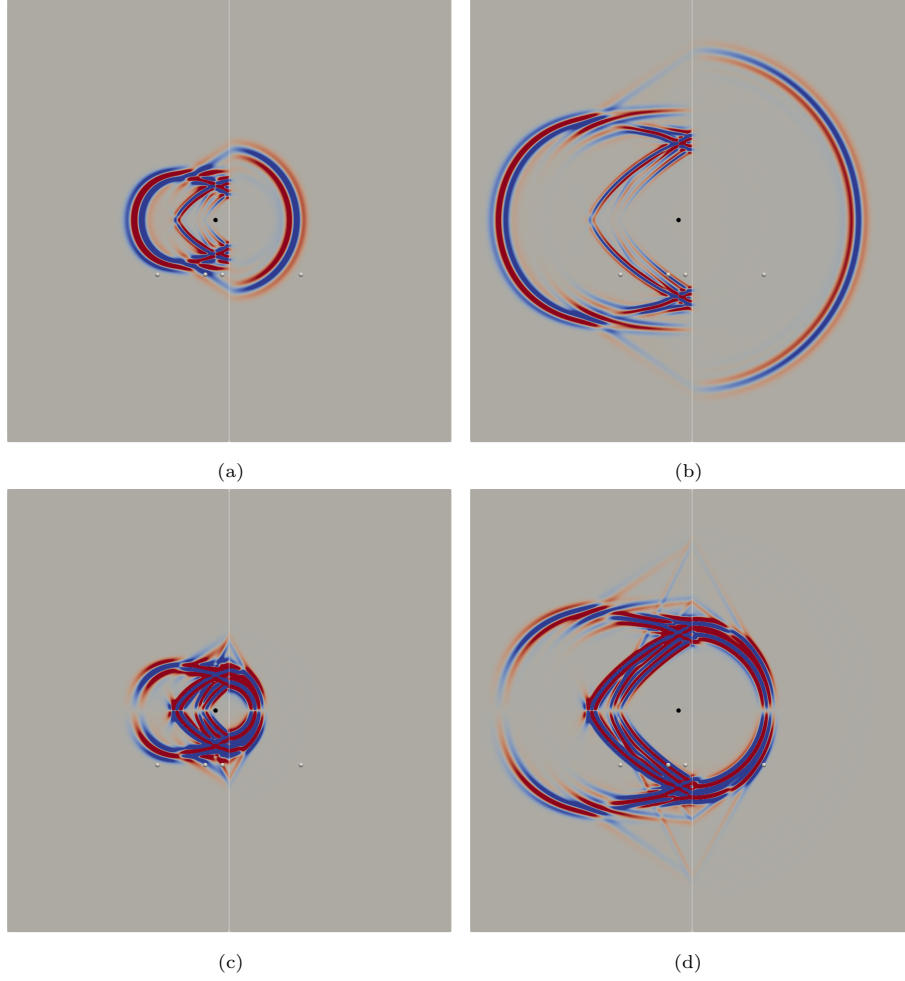


Figure 3: (a) and (b) $\text{div} \mathbf{u}$ respectively at $30\mu\text{s}$ and $60\mu\text{s}$; (c) and (d) $\text{curl} \mathbf{u}$ respectively at $30\mu\text{s}$ and $60\mu\text{s}$. The location of the middle point of the loading segment is indicated by a black circle, and the four sampling locations are indicated by white circles.

565 In our work, the Helmholtz's decomposition is used in the following way
 566 to display quasi longitudinal and quai transverse wave fronts. Displacement
 567 fields are decomposed into two vector fields, the one curl-free and the other one
 568 divergence-free. In the case of isotropic and homogenous elastic media, the curl-
 569 free part $\mathbf{u}_L$ is in fact the longitudinal wave component, as it is solution of the
 570 longitudinal wave equation, while, the divergence-free part $\mathbf{u}_T$ is the transverse
 571 wave component, as it is solution of the transverse wave equation. Therefore,
 572 by displaying the scalar field $\text{div} \mathbf{u}$ ($= \text{div} \mathbf{u}_L$) and the vector field $\text{curl} \mathbf{u}$ ($=$
 573 $\text{curl} \mathbf{u}_T$), longitudinal and transverse wavefronts are respectively represented.

574 Now, let us consider, in the case of 2D anisotropic and homogeneous elastic

media, a quasi longitudinal or a quasi transverse wave of wave vector $\mathbf{k}$ propagating in it: $\mathbf{u} = \mathbf{U}e^{i(\mathbf{k} \cdot \mathbf{x} - \omega t)}$, with $\mathbf{U} = U_k \mathbf{e}_k + U_{k\perp} \mathbf{e}_{k\perp}$, where U_k and $U_{k\perp}$ are the amplitude components respectively parallel and perpendicular to the wave vector $\mathbf{k}$, $\mathbf{e}_k$ and $\mathbf{e}_{k\perp}$ being unit vectors. Then, we have:

$$\text{div} \mathbf{u} = U_k \|\mathbf{k}\| e^{i(\mathbf{k} \cdot \mathbf{x} - \omega t)}, \text{curl} \mathbf{u} = U_{k\perp} \|\mathbf{k}\| \mathbf{e}_k \times \mathbf{e}_{k\perp} e^{i(\mathbf{k} \cdot \mathbf{x} - \omega t)} \quad (76)$$

Therefore, both fields $\text{div} \mathbf{u}$ and $\text{curl} \mathbf{u}$ can still reveal the quasi longitudinal wavefronts and the quasi transverse wavefronts. Generally, we have $|U_{k\perp}| < |U_k|$ on a quasi longitudinal wavefront, and $|U_k| < |U_{k\perp}|$ on a quasi transverse wavefront.

In Figure 3, both fields $\text{div} \mathbf{u}$ and $\text{curl} \mathbf{u}$ calculated by the space dG solver with the finer mesh size h_2^E are shown at two moments $30\mu\text{s}$ and $60\mu\text{s}$. Pure longitudinal and transverse wavefronts are observed in the isotropic material, while quasi longitudinal and transverse wavefronts are observed in the anisotropic material. The visual comparison to the theoretically predicted wavefronts (Figure 2(b)), on the one hand, and to the results presented in [24, 5], on the other hand, shows that the space dG solver correctly solves all propagating phenomena at the physical interface and inside both materials.

To carry out a quantitative comparison between the tDG solver and the sDG solver, we consider displacements recorded at four sample points: $S_1 = (-0.105, -0.08)\text{m}$, $S_2 = (-0.035, -0.08)\text{m}$, $S_3 = (-0.01, -0.08)\text{m}$ and $S_4 = (0.105, -0.08)\text{m}$, as proposed in [5]. In Figure 3, the location of the middle point of the loading segment is indicated by a black circle, and the four sampling locations are indicated by white circles. Figure 4 show the comparison of displacement components calculated by the tDG solver and the sDG solver on the finer mesh, *i.e.*, with $h_2^E = 0.5\text{mm}$. The comparison is good especially for the (quasi) longitudinal wavefronts, which is completely normal, because the wavelength of the longitudinal waves is approximately twice as long as that of the transverse waves. When the comparison is made between the results obtained by using the two different mesh sizes h_1^E and h_2^E (Figure 5), it is worth noticing that the behavior of the sDG solver is much better than that of the tDG solver. Indeed, by the tDG solver, the relative error, which is the difference between the two solutions obtained with respectively h_1^E and h_2^E , is larger, because it is mainly in the phase of the solution. In other words, the arrival time of the waves is much more correctly calculated by the sDG solver, even with the coarser element size h_1^E .

5.2. Polycrystalline materials

The second example considers the application of the sDG solver to single-phase and untextured polycrystalline materials in the 2D case and was proposed in our previous work [8]. We recall that a single-phased polycrystal is an assembly of small single crystals bonded together. Each crystallite (grain) is anisotropic and they all have the same elastic Hooke tensor but with differently and randomly oriented basis of anisotropy. Hence, such a polycrystalline material is a typical example of piecewise homogeneous media including a large

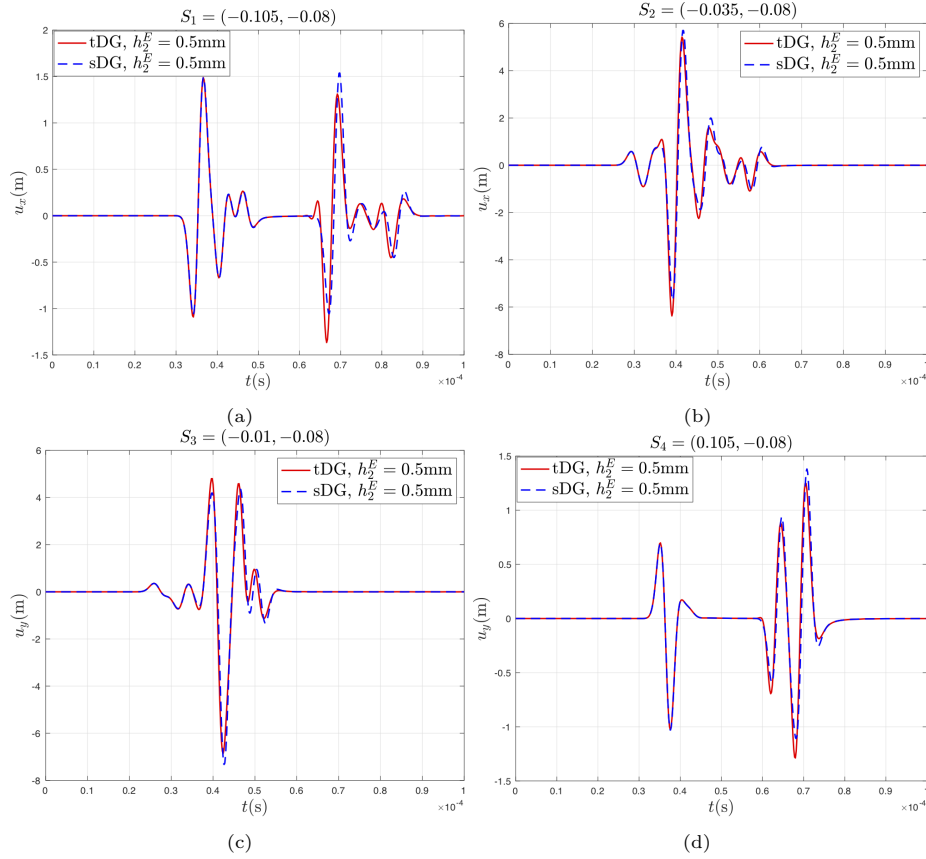


Figure 4: Comparison of displacement components calculated by the tDG solver and the sDG solver on the finer mesh.

number of physical interfaces. Elastic waves propagating in it are scattered and attenuated due to interactions between waves and grain interfaces.

In a single-phase polycrystalline material, the degree of inhomogeneity in elastic properties is completely determined by the degree of anisotropy of the crystallite's Hooke tensor: the stronger the anisotropy, the higher the degree of inhomogeneity. In the related literature, it is usually expressed by measuring its departure from its Voigt average homogeneous equivalent medium in the following way [25]:

$$\xi_{ijkl}^2 = \frac{1}{4} \frac{\langle (C_{ijkl}(\theta) - C_{ijkl}^{Voigt})^2 \rangle_\theta}{(C_{ijkl}^{ref-Voigt})^2} \quad (77)$$

where, the subscript “ $ijkl$ ” has the proper value for either longitudinal or transverse waves, and $\langle \cdot \rangle_\theta$ stands for the average over all orientations of the local material anisotropic axes denoted by θ .

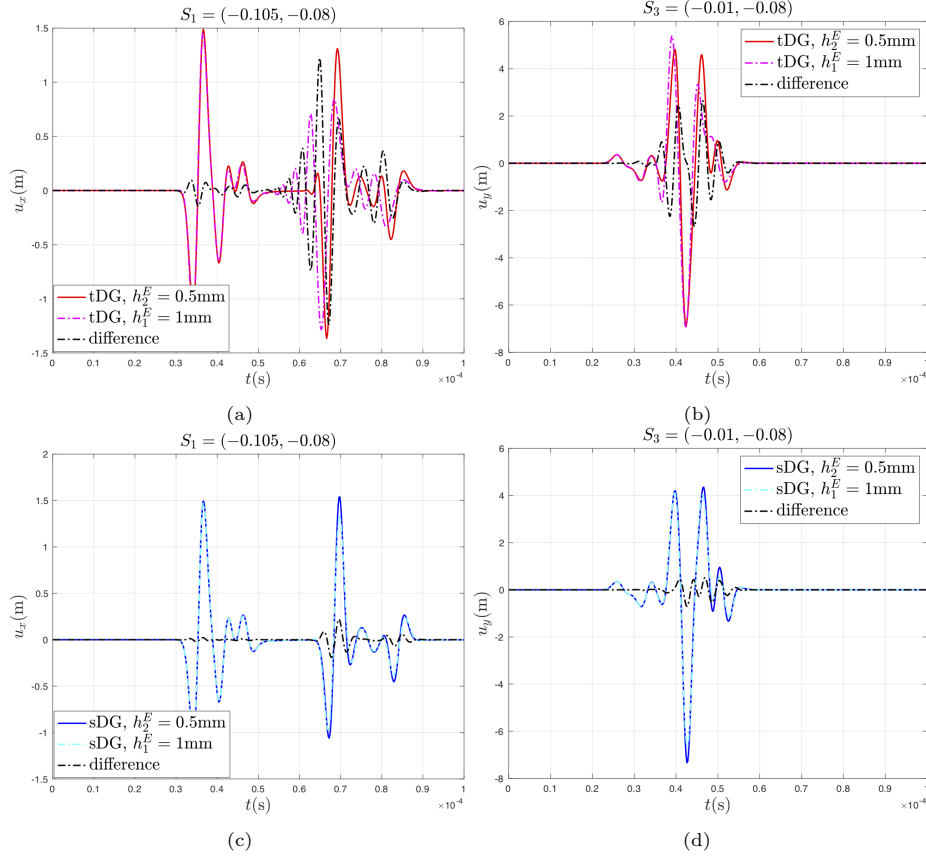


Figure 5: Comparison of displacement components calculated with two different mesh sizes.

Each finite element model defined herein is a polycrystal occupying a rectangular domain, and it is composed of 2106 elliptic grains of size $480\mu\text{m} \times 240\mu\text{m}$. The dimensions of the rectangular domain are given in Figure 6(a). The free boundary condition is prescribed on the boundary of the rectangular domain, except that a pressure loading is applied on a segment L_e of length 2.8mm. For the amplitude of the pressure loading, a Gaussian distribution along the segment L_e is chosen in order to reduce as much as possible the generation of transverse waves at the ends of the segment L_e . The period of ricker signal in time of the pressure loadings is $T_r = 0.4\mu\text{s}$, resulting in $f_{max} = 5\text{MHz}$ and $f_c = 12.5\text{MHz}$. Hence, the frequency domain of validation to be considered hereafter ranges from 2MHz to 12.5MHz.

Two polycrystals with different degrees of inhomogeneity are considered:

- (1) Reference material denoted by “ref”. It is a titanium alloy with crystallites of cubic symmetry. It is orthotropic and its Hooke tensor is denoted by $\mathbf{C}^{ref}$.
- (2) Material denoted by “strong”. To define an orthotropic material with a high

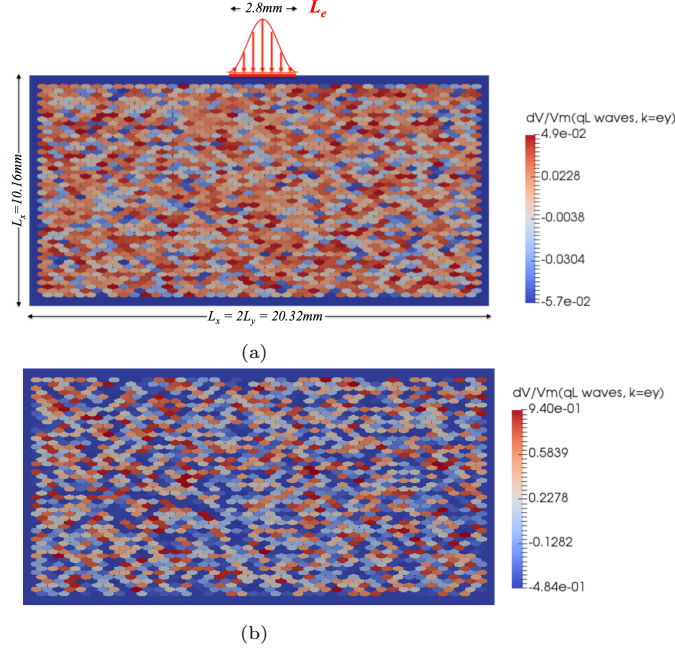


Figure 6: (a) FE model of a single-phase polycrystal composed of elliptic grains with pressure loading applied on the emitter segment L_e with a Gaussian distribution. Dispersions dV/V_m in the phase wave velocity $c_{qL}(\mathbf{k})$ with $\mathbf{k} = \mathbf{e}_y$ for the polycrystals (a) “ref” and (b) “strong”, V_m being the averaged wave velocity $\langle c_{qL}(\mathbf{k}) \rangle_{grains}$ over all grains and $dV = c_{qL}(\mathbf{k}) - V_m$ for each grain.

degree of anisotropy, we use the Hooke tensor $\mathbf{C}^{strong}$ of a fiber-reinforced material.

For both materials, their homogenized equivalent media are isotropic and the corresponding Voigt average Hooke tensors are respectively denoted by $\mathbf{C}^{ref-Voigt}$ and $\mathbf{C}^{strong-Voigt}$. The elastic moduli in the local material anisotropic basis $(\mathbf{a}_1, \mathbf{a}_2, \mathbf{a}_3)$ of both polycrystals are given in Table II, as well as ξ_L the degree of inhomogeneity. Their densities are respectively $\rho^{ref} = 4428\text{kg.m}^{-3}$ and $\rho^{strong} = 2710\text{kg.m}^{-3}$.

Ten samples with different random distributions $\{\Theta_i\}_{i=0,\dots,9}$ of crystallographic orientations are considered.

As for the choice of numerical parameters, square Q4 elements of size $h = 25\mu\text{m}$ are used. This choice leads to have at least about 19 elements in the shortest quasi-longitudinal wavelength for the cut-off frequency f_c for all the studied materials, except the material “strong-Voigt” for which this number is about 12. As the principle results considered are numerical measures of the attenuation coefficient and of the noise levels of the quasi longitudinal waves, the finite element size is defined with respect to the shortest quasi longitudinal wavelength, which is approximately twice the shortest quasi transverse wavelength. We note that the influence of the finite element size on these numerical

	C_{iiii}	$C_{iijj,i \neq j}$	$C_{ijij,i \neq j}$	ξ_L			
$C^{ref}(\text{GPa})$	134.0	110.0	36.0	0.028			
$C^{ref-Voigt}(\text{GPa})$	153.0	100.0	26.5	0			
	C_{1111}	$C_{iiii,i=2,3}$	C_{2233}	$C_{11ii,i=2,3}$	$C_{1i1i,i=2,3}$	C_{2323}	ξ_L
$C^{strong}(\text{GPa})$	132.5	10.3	0.4	3.6	4.0	5.0	0.563
$C^{strong-Voigt}(\text{GPa})$	35.4	35.4	10.6	10.6	12.4	12.4	0

Table II: Elastic moduli and degrees of inhomogeneity of the studied materials “ref” and “strong”, and their homogenized equivalent media “ref-Voigt” and “strong-Voigt”

measures has been studied in [26, 27]. Finally, the time steps are calculated by using the formulas (73) for the sDG solver and (75) for the tDG solver.

Numerical results obtained with the use of the flux “MG_sDG” are compared to those calculated by either the tDG solver or the space dG solver with a flux defined by using the Voigt average of Hooke elastic tensor at a physical interface (named “cV_sDG” hereafter). We recall that the flux “cV_sDG” was proposed in [8] and it does not solve exactly the Riemann problem on a physical interface.

The quantitative comparison of numerical results obtained by the three solvers “tDG”, “cV_sDG” and “MG_sDG” is made in terms of two numerically evaluated quantities: the attenuation coefficient $\alpha(f)$ in the frequency domain and the backscattered noise levels in the time domain calculated as normalized root-mean-square (rms) noise levels $N_{rms}(f_0; t)$ for a given frequency f_0 . Both quantities are calculated for the longitudinal waves.

Firstly, the attenuation coefficient is numerically evaluated in the ten samples in the polycrystal “ref”. In a polycrystal, the attenuation measures the amplitude decay of elastic waves during their propagation and it can be caused by dissipation, geometrical spreading or scattering-induced diffusion. In the present work, only the scattering-induced attenuation is considered, and it is usually quantified by a scalar α , called the attenuation coefficient, which defines an exponential decay law. Numerical calculation of α in the frequency domain is done in the following way [26, 28]: Discrete Fourier Transform is used to decompose the time-series signal of the reflected wave fronts $v_y^r(\mathbf{x}_j, t)$ at the j th probe $\mathbf{x}_j$ into the frequency domain and gives rise to the corresponding amplitude spectrum $\hat{v}_y^r(\mathbf{x}_j, f)$. With those data, the attenuation coefficient $\alpha(f)$ as a function of the frequency f is measured as:

$$\alpha(f) = -\frac{10}{D} \ln\left(\frac{\sum_{j=1}^M |\hat{v}_y^r(\mathbf{x}_j, f)|^2}{\sum_{j=1}^M |\hat{v}_y^{r,ref}(\mathbf{x}_j, f)|^2}\right) \quad (78)$$

To eliminate the attenuation due to the geometrical spreading of wavefront, the ratio in (78) is calculated with respect to $\hat{v}_y^{r,ref}(\mathbf{x}_j, f)$ the reflected echo signals recorded in the equivalent homogeneous medium instead of the incident signals. In (78), $M = 22$, the constant 10 is for the unit conversion from Neper (Np) to decibel (dB), and D stands for the wave propagation distance just before the arrival of reflected echoes at the probes.

Figure 7 presents comparisons between the numerical measurements of attenuation in the polycrystal “ref” by the three solvers ‘tDG’, ‘cV_sDG’ and ‘MG_sDG’. The attenuation coefficient α is plotted either for the crystallographic orientation distribution Θ_0 (Figure 7(a)) or for all the ten $\{\Theta_i\}_{i=0,\dots,9}$ (Figure 7(b)). In the latter case, the averaged measure and the minimum and maximum bounds for all the ten measures are plotted. The numerical measurements given by both space dG solvers with two different fluxes are very close, giving a maximum relative difference of 3% for both single and averaged measurements. We note that the polycrystal “strong” is not considered for the attenuation coefficient, because coherent echo signals cannot be recorded due to the high levels of backscattered noises.

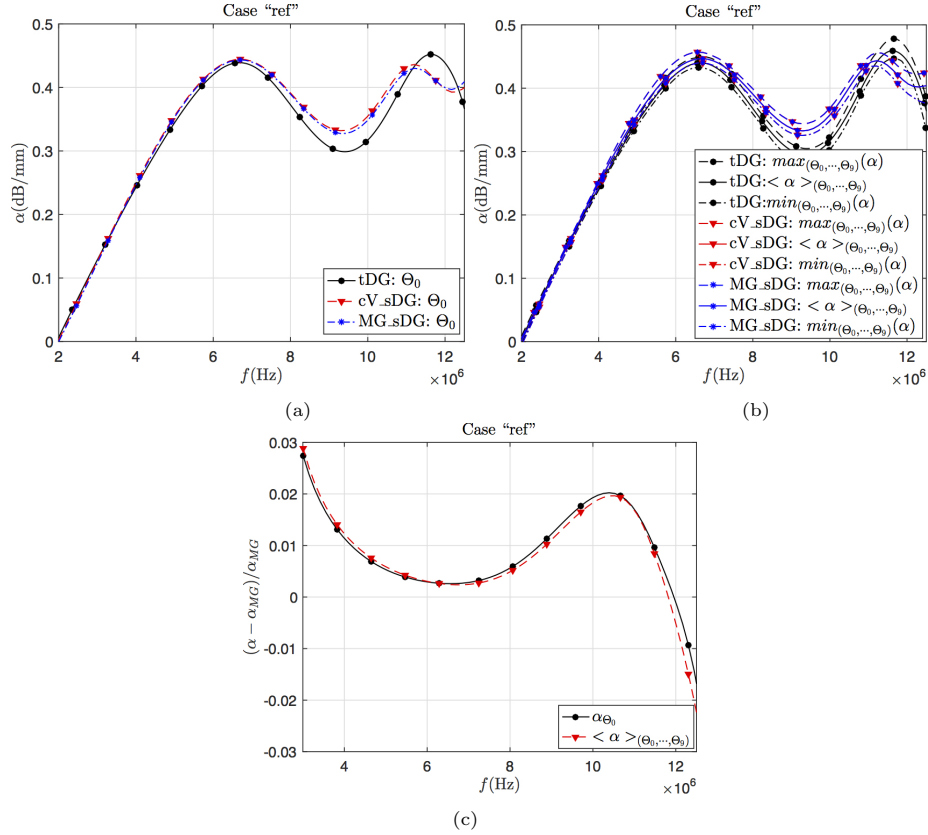


Figure 7: Comparison between three solvers of numerical measurements of the attenuation coefficient α in the polycrystal “ref”. (a) α measured in the sample Θ_0 ; (b) Discrepancies of numerical measure with $\text{mean}_{\Theta}(\alpha)$, $\text{min}_{\Theta}(\alpha)$ and $\text{max}_{\Theta}(\alpha)$ denoting respectively the averaged numerical measures, the minimum and maximum bounds of numerical measures over the ten samples $\Theta_0 - \Theta_9$; (c) Relative differences taking the measurements given by “MG_sDG” as the reference one.

Secondly, backscattered noise levels are numerically measured in the time domain for two frequencies $f_0 = 5\text{MHz}$ and 10MHz . We recall that the backscat-

tered noise levels are numerically measured in the time domain for a given frequency f_0 in terms of normalized root-mean-square (rms) noise levels $N_{rms}(f_0; t)$, which are defined in the following way [29, 26, 27]:

$$N_{rms}(f_0; t) = \frac{\sqrt{\frac{1}{10 \times M} \sum_{j=1}^{10 \times M} (v_y^b(f_0; \mathbf{x}_j, t) - b(f_0; t))^2}}{E_{max}(f_0)} \quad (79)$$

with

$$b(f_0; t) = \frac{1}{10 \times M} \sum_{j=1}^{10 \times M} v_y^b(f_0; \mathbf{x}_j, t) \quad (80)$$

where $10 \times M$ means the average is taken over all probes and over all the ten samples. For a given frequency f_0 , Equation (79) defines in the time domain the rms positional average of the difference between the noise signal $v_y^b(f_0; \mathbf{x}_j, t)$ and the mean noise level $b(f_0; t)$. The noise signal $v_y^b(f_0; \mathbf{x}_j, t)$ is calculated by applying a frequency filtering to the noise signal $v_y^b(\mathbf{x}_j, t) = v_y(\mathbf{x}_j, t) - v_y^{ref}(\mathbf{x}_j, t)$ recorded at the j th receiver $\mathbf{x}_j$. The normalization by $E_{max}(f_0)$ eliminates the dependence of the noise level on the incident power. $E_{max}(f_0)$ is taken equal to one half of the peak-to-peak amplitude of the incident signals for the frequency f_0 , as proposed in [29].

Comparisons between the three solvers of the normalized rms noise levels $N_{rms}(f_0; t)$ in the time domain for the ten samples of the polycrystal “ref” (*resp.* “strong”) are presented in Figure 8 (*resp.* Figure 9). Backscattered noise levels evaluated by the two solvers “cV_sDG” and “MG_sDG” are very close. However, it can be noted that discrepancies between them increase with time and are more due to a phase shift than to differences in the amplitude. Finally, it is shown in Figure 10 that the higher the degree of inhomogeneity, the greater the gap resulting from the use of two different numerical fluxes “cV_sDG” and “MG_sDG”.

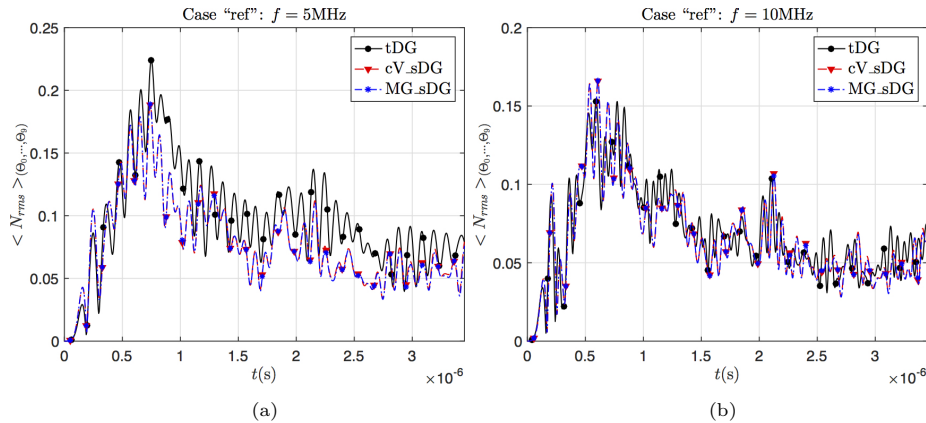


Figure 8: Comparison between three solvers of the normalized rms noise levels $N_{rms}(f_0; t)$ for the ten samples of the polycrystal “ref”. (a) $f_0 = 5\text{MHz}$; (b) $f_0 = 10\text{MHz}$

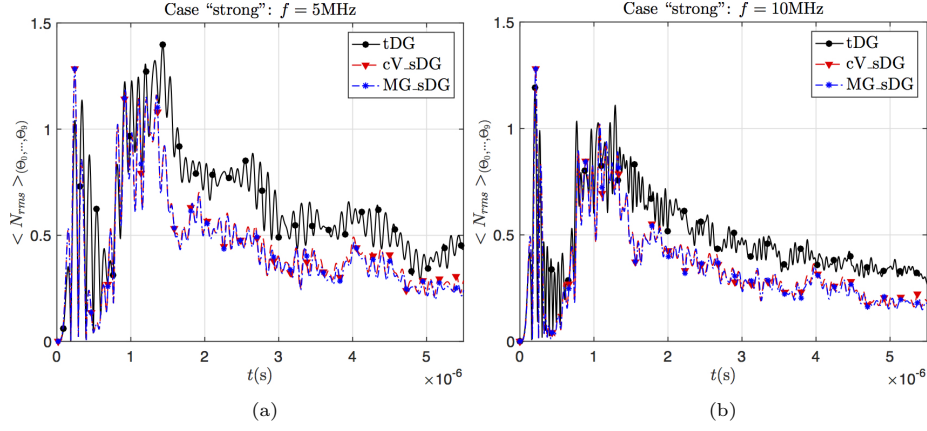


Figure 9: Comparison between three solvers of the normalized rms noise levels $N_{rms}(f_0; t)$ for the ten samples of the polycrystal “strong”. (a) $f_0 = 5\text{MHz}$; (b) $f_0 = 10\text{MHz}$

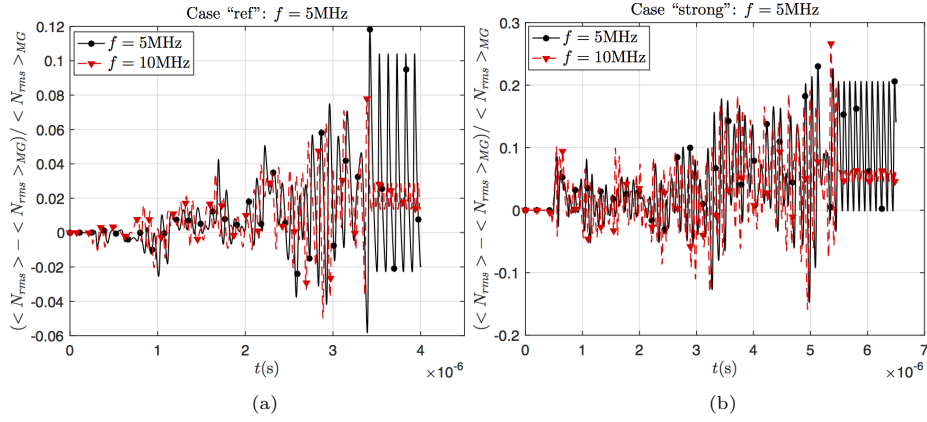


Figure 10: Comparison between both solvers “cV_sDG” and “MG_sDG” of the averaged normalized rms noise levels $N_{rms}(f_0; t)$: relative differences taking the measurements given by “MG_sDG” as the reference one for the polycrystals (a) “ref” and (b) “strong”

6. Conclusions

A systematic development of upwind numerical fluxes for the space discontinuous Galerkin method to model elastic wave propagation has been proposed in the most general case of multidimensional anisotropic and heterogeneous media with physical interfaces, *i.e.* interfaces with discontinuous material properties. Within a unified and wave oriented variational framework, both first-order velocity-stress and velocity-strain wave formulations were considered, and upwind numerical fluxes were developed in explicit and intrinsic tensorial expressions. They are approximate or exact solution of a Riemann problem, depending hierarchically on the degree of inhomogeneity across a physical interface. More particularly in the case of the first-order velocity-stress wave formulation, the

tricky issue of defining a relevant Riemann problem in order to obtain physically sound interface conditions was discussed and solved. Finally, the upwind numerical flux that is exact solution of the appropriately defined Riemann problem was validated by numerical examples involving one or more physical interfaces separating anisotropic materials.

As an important remark, the analysis of stability of a space dG method is essential, because of the use of numerical fluxes. A stability analysis has been performed by the author for the velocity-stress wave formulation [30]. At the continuous level of the time and whatever the space dimension, the stability has been proved in the case of an isotropic or anisotropic elastic medium with continuous properties or an isotropic elastic medium with discontinuous properties. But, the stability has been only proved in the 2D case for an anisotropic elastic medium with discontinuous properties satisfying a sufficient condition, which involves the degree of inhomogeneity of physical interfaces. In our current numerical studies, we have not yet encountered any instability problem. But, it is clear that this is an important point to be addressed by future studies.

Acknowledgments

This work was granted by the ANR (Agence Nationale de la Recherche) - MAPIE project, ANR-13-MONU-002. Computations were performed using HPC resources from the “Mésocentre” computing center of CentraleSupélec and ENS Paris-Saclay.

References

- [1] B. Cockburn, G. Karniadakis, C.-W. Shu, (Eds.), Discontinuous Galerkin Methods. Theory, Computation and Applications, Lecture Notes in Computational Science and Engineering, volume 11, ISBN-13:978-3-642-64098-8, Springer-Verlag, 2000.
- [2] R. LeVeque, Finite Volume Methods for Hyperbolic Problems, Cambridge Texts in Applied Mathematics, Cambridge University Press, 2002.
- [3] M. Käser, M. Dumbser, An arbitrary high-order discontinuous Galerkin method for elastic waves on unstructured meshes – I. the two-dimensional isotropic case with external source terms, *Geophysical Journal International* 166 (2) (2006) 855–877. doi:10.1111/j.1365-246X.2006.03051.x.
- [4] M. Dumbser, M. Käser, An arbitrary high-order discontinuous Galerkin method for elastic waves on unstructured meshes – II. the three-dimensional isotropic case, *Geophysical Journal International* 167 (1) (2006) 319–336. doi:10.1111/j.1365-246X.2006.03120.x.
- [5] J. de la Puente, M. Käser, M. Dumbser, H. Igel, An arbitrary high-order discontinuous Galerkin method for elastic waves on unstructured meshes – IV. anisotropy, *Geophysical Journal International* 169 (3) (2007) 1210–1228. doi:10.1111/j.1365-246X.2007.03381.x.

- [6] L. Wilcox, G. Stadler, C. Burstedde, O. Ghattas, A high-order discontinuous Galerkin method for wave propagation through coupled elastic-acoustic media, *Journal of computational Physics* 229 (2010) 9373–9396. doi:doi:10.1016/j.jcp.2010.09.008.
- [7] N. Dudley Ward, T. Lähivaara, S. Eveson, A discontinuous Galerkin method for poroelastic wave propagation: The two-dimensional case, *Journal of Computational Physics* 350 (2017) 690–727.
- [8] B. Tie, A.-S. Mouronval, V.-D. Nguyen, L. Series, D. Aubry, A unified variational framework for the space discontinuous Galerkin method for elastic wave propagation in anisotropic and piecewise homogeneous media, *Computer Methods in Applied Mechanics and Engineering* 338 (2018) 299–332.
- [9] Q. Zhan, Q. Ren, M. Zhuang, Q. Sun, Q. Liu, An exact Riemann solver for wave propagation in arbitrary anisotropic elastic media with fluid coupling, *Computer Methods in Applied Mechanics and Engineering* 329 (2018) 24–39.
- [10] Q. Zhan, M. Zhuang, Y. Mao, Q. Liu, Unified Riemann solution for multiphysics coupling: Anisotropic poroelastic/elastic/fluid interfaces, *Journal of Computational Physics* 402 (2020) 108961.
- [11] T. Warburton, A low-storage curvilinear discontinuous Galerkin method for wave problems, *SIAM J. Sci. Comput.* 35 (4) (2013) A1987–A2012.
- [12] R. Ye, M. de Hoop, C. Petrovitch, L. Pyrak-Nolte, L. Wilcox, A discontinuous Galerkin method with a modified penalty flux for the propagation and scattering of acousto-elastic waves, *Geophysical Journal International* 205 (2016) 1267–1289.
- [13] J. Chan, Weight-adjusted discontinuous Galerkin methods: Matrix-valued weights and elastic wave propagation in heterogeneous media, *International Journal for Numerical Methods in Engineering* 113(12) (2018) 1779–1809.
- [14] K. Shukla, J. Chan, M. de Hoop, P. Jaiswal, A weight-adjusted discontinuous Galerkin method for the poroelastic wave equation: Penalty fluxes and micro-heterogeneities, *Journal of Computational Physics* 403 (2020) 109061.
- [15] E. Toro, *Riemann Solvers and Numerical Methods for Fluid Dynamics: A Practical Introduction*, Springer, 2009.
- [16] B. Cockburn, C.-W. Shu, Runge-Kutta Discontinuous Galerkin Methods for Convection-Dominated Problems, *J. Sci. Comput.* 16 (3) (2002) 173–261.
- [17] T. J. Hughes, G. Hulbert, Space-time finite element methods for elastodynamics: Formulations and error estimates, *Computer Methods in Applied Mechanics and Engineering* 66 (1988) 339–363.

- [18] C. Johnson, Discontinuous Galerkin finite element methods for second order hyperbolic problems, *Computer Methods in Applied Mechanics and Engineering* 107 (1993) 117–129.
- [19] M. Li, N. Wiberg, Implementation and adaptivity of space-time finite element method for structural dynamics, *Computer Methods in Applied Mechanics and Engineering* 156 (1998) 211–229.
- [20] B. Tie, D. Aubry, Adaptive time discontinuous Galerkin method for numerical modeling of wave propagation in shell and 3D structures, *European Journal of computational Mechanics* 15 (6) (2006) 729–757.
- [21] J.-M. Leclère, Parallel and adaptive FE modeling of elastic wave propagation in structures (Modélisation parallèle de la propagation d’ondes dans les structures par éléments finis adaptatifs), Ph.D. thesis, École Centrale de Paris (in French) (2001).
- [22] A. Grédé, Numerical modeling of pyrotechnic shock wave propagation in Ariane5’s structures (Modélisation des chocs d’origine pyrotechnique dans les structures d’Ariane5 : Développement de modèles de propagation et d’outils de modélisation), Ph.D. thesis, École Centrale de Paris (in French) (2009).
- [23] T. Ekevid, M. X. Li, N. Wiberg, Adaptive FEA of wave propagation induced by high-speed trains, *Computers and Structures* 79 (2001) 2693–2704.
- [24] D. Komatitsch, C. Barnes, J. Tromp, Simulation of anisotropic wave propagation based upon a spectral element method, *Geophysics* 65 (2000) 1251–1260.
- [25] F. E. Stanke, G. S. Kino, A unified theory for elastic wave-propagation in polycrystalline materials, *Journal of the Acoustical Society of America* 75(3) (1984) 665–681.
- [26] X. Bai, Finite element modeling of ultrasonic wave propagation in polycrystalline materials, Ph.D. thesis, CentraleSupélec (2017).
URL <https://tel.archives-ouvertes.fr/tel-01483701/document>
- [27] X. Bai, B. Tie, J.-H. Schmitt, D. Aubry, Finite element modeling of grain size effects on the ultrasonic microstructural noise backscattering in polycrystalline materials, *Ultrasonics* 87 (2018) 182–202.
- [28] X. Bai, B. Tie, J.-H. Schmitt, D. Aubry, Comparison of ultrasonic attenuation within two- and three-dimensional polycrystalline media, *Ultrasonics* 100 (2020 (Available online 19 August 2019)) 105980, <https://doi.org/10.1016/j.ultras.2019.105980>.

- [29] F. Margetan, R. Thompson, I. Yalda-Mooshabad, Backscattered microstructural noise in ultrasonic toneburst inspections, *Journal of Nondestructive Evaluation* 13(3) (1994) 111–136.
- [30] B. Tie, Some comparisons and analyses of time or space discontinuous Galerkin methods applied to elastic wave propagation in anisotropic and heterogeneous media, *Advanced Modeling and Simulation in Engineering Sciences* 6 (3) (2019) 1–27.

Appendix A1

Proof of Theorem 3.1. By adding the three equations of (21), *i.e.* Eq.(21a) + Eq.(21b) + Eq.(21c), we get:

$$\mathbf{A}_{\mathbf{n}}(\mathbf{U}_h) - \alpha_k \lambda_{\mathbf{n},k}^- \mathbf{R}_{\mathbf{n},k}^- + \mathbf{A}'_{\mathbf{n}'}(\mathbf{U}'_h) - \alpha'_k \lambda_{\mathbf{n}',k}^- \mathbf{R}_{\mathbf{n}',k}^- = \mathbf{0} \quad (81)$$

According to the definition of the Jacobian operator (6), the eigenmodes (16) and the definition (18) and the property (17) of the Christoffel tensor $\mathbf{\Gamma}_{\mathbf{n}}$, we obtain the following equations by considering separately $\wp_{vect}$ (Eq.(81)) and $\mathbf{n} \cdot \wp_{tens}$ (Eq.(81)):

$$\frac{\boldsymbol{\sigma}_h \cdot \mathbf{n}}{\rho} + \frac{\boldsymbol{\sigma}'_h \cdot \mathbf{n}'}{\rho'} = - \sum_l \frac{\alpha_l}{\rho} z_{\mathbf{n},l}^- \frac{\gamma_{\mathbf{n},l}}{\sqrt{2}} - \sum_l \frac{\alpha'_l}{\rho'} z_{\mathbf{n}',l}^- \frac{\gamma'_{\mathbf{n}',l}}{\sqrt{2}} \quad (82a)$$

$$\rho \mathbf{\Gamma}_{\mathbf{n}} \cdot \mathbf{v}_h - \rho' \mathbf{\Gamma}'_{\mathbf{n}'} \cdot \mathbf{v}'_h = \sum_l \frac{\alpha_l}{\rho} (z_{\mathbf{n},l}^-)^2 \frac{\gamma_{\mathbf{n},l}}{\sqrt{2}} - \sum_l \frac{\alpha'_l}{\rho'} (z_{\mathbf{n}',l}^-)^2 \frac{\gamma'_{\mathbf{n}',l}}{\sqrt{2}} \quad (82b)$$

We recall that the sum is taken over $l = qL, qT_1, qT_2$ and for the sake of clarity the symbol of summation $\sum_l$ is explicitly added in (82). (82) is a linear system of six equations for six unknowns $\{\alpha_k, \alpha'_k\}$. Then, to obtain the expressions given in Theorem 3.1, the following manipulations of (82) are made:

- For first three equations corresponding to $\{\alpha_k\}$

$$\frac{\overline{z_{\mathbf{n},k}^-}^R}{z_{\mathbf{n}',k}^-} \frac{\gamma_{\mathbf{n},k}}{\sqrt{2}} \cdot \left(- \frac{z_{\mathbf{n}',k}^-}{\rho^{-1}(z_{\mathbf{n},k}^-)^2} \text{Eq.(82a)} + \frac{1}{\rho^{-1}(z_{\mathbf{n},k}^-)^2} \text{Eq.(82b)} \right) \text{ results into:}$$

$$^* \mathbf{L}_{\mathbf{n},k}^- \cdot \mathbf{U}_h - ^* \mathbf{L}_{\mathbf{n},k}^- \cdot \mathbf{U}'_h = \alpha_k + \frac{1}{2} \sum_{l \neq k} \left(\frac{\overline{z_{\mathbf{n},k}^-}^R}{z_{\mathbf{n},k}^-} \frac{\rho}{\rho'} \frac{z_{\mathbf{n}',l}^- \delta z_{\mathbf{n}',kl}^-}{z_{\mathbf{n},k}^- z_{\mathbf{n}',k}^-} \gamma_{\mathbf{n},k} \cdot \gamma'_{\mathbf{n}',l} \right) \alpha'_l \quad (83)$$

- For the last three equations corresponding to $\{\alpha'_k\}$

$$\frac{\overline{z_{\mathbf{n},k}^-}^R}{z_{\mathbf{n},k}^-} \frac{\gamma'_{\mathbf{n}',k}}{\sqrt{2}} \cdot \left(- \frac{z_{\mathbf{n},k}^-}{\rho'^{-1}(z_{\mathbf{n}',k}^-)^2} \text{Eq.(82a)} - \frac{1}{\rho'^{-1}(z_{\mathbf{n}',k}^-)^2} \text{Eq.(82b)} \right) \text{ results into:}$$

$$^* \mathbf{L}_{\mathbf{n}',k}^{-'} \cdot \mathbf{U}'_h - ^* \mathbf{L}_{\mathbf{n}',k}^{-'} \cdot \mathbf{U}_h = \alpha'_k + \frac{1}{2} \sum_{l \neq k} \left(\frac{\overline{z_{\mathbf{n},k}^-}^R}{z_{\mathbf{n}',k}^{-'}} \frac{\rho'}{\rho} \frac{z_{\mathbf{n},l}^- \delta z_{\mathbf{n},kl}^-}{z_{\mathbf{n}',k}^{-'} z_{\mathbf{n},k}^-} \gamma'_{\mathbf{n}',k} \cdot \gamma_{\mathbf{n},l} \right) \alpha_l \quad (84)$$

875 The matrix form of (83) and (84) gives rise to (26). $\square$

876 Appendix A2

877 *Lemma A2.1.* In the case of continuous material properties, the following equa-
878 tions hold on the interface of elements E and E' :

$$\lambda'_{\mathbf{n}',k} = \lambda_{\mathbf{n},k}, \mathbf{R}_{\mathbf{n}',k}^{\mp'} = -\mathbf{R}_{\mathbf{n},k}^{\pm}, \mathbf{L}_{\mathbf{n}',k}^{\mp'} = -\mathbf{L}_{\mathbf{n},k}^{\pm} \quad (85)$$

879 *Proof.* As the material properties are continuous, we have $\Gamma_{\mathbf{n}} = \Gamma'_{\mathbf{n}'}$, so $\lambda'_{\mathbf{n}',k} =$
880 $\lambda_{\mathbf{n},k}$. Otherwise, by recalling (16), it can be verified that:

$$\begin{aligned} \mathbf{R}_{\mathbf{n},k}^{\pm} &= \begin{pmatrix} \mathbf{w}_{\mathbf{n},k} \\ -\rho(z_{\mathbf{n},k}^{\pm})^{-1} \mathbf{C} : (\mathbf{n} \otimes_s \mathbf{w}_{\mathbf{n},k}) \end{pmatrix} \\ &= \begin{pmatrix} -\mathbf{w}_{\mathbf{n}',k} \\ -\rho'(z_{\mathbf{n}',k}^{\pm'})^{-1} \mathbf{C}' : (\mathbf{n}' \otimes_s \mathbf{w}_{\mathbf{n}',k}) \end{pmatrix} \\ &= -\begin{pmatrix} \mathbf{w}_{\mathbf{n}',k} \\ -\rho'(z_{\mathbf{n}',k}^{\mp'})^{-1} \mathbf{C}' : (\mathbf{n}' \otimes_s \mathbf{w}_{\mathbf{n}',k}) \end{pmatrix} \\ &= -\mathbf{R}_{\mathbf{n}',k}^{\pm'} \end{aligned} \quad (86)$$

881 $\mathbf{L}_{\mathbf{n}',k}^{\mp'} = \mathbf{L}_{\mathbf{n},k}^{\pm}$ can be verified in the same way. $\square$

882 Appendix A3

883 *Proof of Theorem 3.4.* By adding the three equations of (43), *i.e.* Eq.(43a) +
884 Eq.(43b) + Eq.(43c), we get:

$$\tilde{\mathbf{A}}_{\mathbf{n}}(\mathbf{U}_h) - \tilde{\alpha}_k \lambda_{\mathbf{n},k}^- \tilde{\mathbf{M}}(\mathbf{R}_{\mathbf{n},k}^-) + \tilde{\mathbf{A}}'_{\mathbf{n}'}(\mathbf{U}'_h) - \tilde{\alpha}'_k \lambda_{\mathbf{n}',k}^{-'} \tilde{\mathbf{M}}'(\mathbf{R}_{\mathbf{n}',k}^{-'}) = \mathbf{0} \quad (87)$$

According to the definition of $\tilde{\mathbf{A}}_{\mathbf{n}}$ (45), the eigenmodes (16) and the equation (46), we obtain the following equations by considering separately $\wp_{vect}$ (Eq.(87)) and $\wp_{tens}$ (Eq.(87)):

$$\boldsymbol{\sigma}_h \cdot \mathbf{n} + \boldsymbol{\sigma}'_h \cdot \mathbf{n}' = - \sum_l \tilde{\alpha}_l z_{\mathbf{n},l}^- \frac{\gamma_{\mathbf{n},l}}{\sqrt{2}} - \sum_l \tilde{\alpha}'_l z_{\mathbf{n}',l}^{-'} \frac{\gamma'_{\mathbf{n}',l}}{\sqrt{2}} \quad (88a)$$

$$\mathbf{v}_h - \mathbf{v}'_h = \sum_l \tilde{\alpha}_l \frac{\gamma_{\mathbf{n},l}}{\sqrt{2}} - \sum_l \tilde{\alpha}'_l \frac{\gamma'_{\mathbf{n}',l}}{\sqrt{2}} \quad (88b)$$

885 To obtain (88b), we have used the fact that $\mathbf{w} \otimes_s \mathbf{n} = \mathbf{0}$ implies $\mathbf{w} = \mathbf{0}$.

886 Then, to obtain the expressions given in Theorem 3.4, the following manip-
887 ulations of (88) are made:

- For the first three equations corresponding to $\{\tilde{\alpha}_k\}$

$\frac{\overline{z_{\mathbf{n},k}}}{z_{\mathbf{n},k}} \frac{\gamma_{\mathbf{n},k}}{\sqrt{2}} \cdot (-\frac{1}{z_{\mathbf{n}',k}} \text{Eq.}(88a) + \text{Eq.}(88b))$ leads to:

$$\tilde{\mathbf{L}}_{\mathbf{n},k}^- \cdot (\mathbf{U}_h - \mathbf{U}'_h) = \tilde{\alpha}_k - \frac{1}{2} \sum_{l \neq k} \left(\frac{\overline{z_{\mathbf{n},k}}}{z_{\mathbf{n},k}} \frac{\delta z_{\mathbf{n}',kl}}{z_{\mathbf{n}',k}} \gamma_{\mathbf{n},k} \cdot \gamma'_{\mathbf{n}',l} \right) \alpha'_l \quad (89)$$

- For the last three equations corresponding to $\{\tilde{\alpha}'_k\}$

$\frac{\overline{z_{\mathbf{n},k}}}{z_{\mathbf{n}',k}} \frac{\gamma'_{\mathbf{n}',k}}{\sqrt{2}} \cdot (-\frac{1}{z_{\mathbf{n},k}} \text{Eq.}(88a) + \text{Eq.}(88b))$ leads to:

$$\tilde{\mathbf{L}}_{\mathbf{n}',k}^{-'} \cdot (\mathbf{U}'_h - \mathbf{U}_h) = \tilde{\alpha}'_k - \frac{1}{2} \sum_{l \neq k} \left(\frac{\overline{z_{\mathbf{n},k}}}{z_{\mathbf{n}',k}} \frac{\delta z_{\mathbf{n},kl}}{z_{\mathbf{n},k}} \gamma'_{\mathbf{n}',k} \cdot \gamma_{\mathbf{n},l} \right) \alpha_l \quad (90)$$

The matrix form of (89) and (90) gives rise to (49). $\square$

Appendix A4

Proof of Theorem 4.1. By adding the three equations of (62), *i.e.* Eq.(62a) + Eq.(62b) + Eq.(62c), we get:

$$\mathbf{A}_{\mathbf{n}}(\mathbf{U}_h) - \alpha_k \lambda_{\mathbf{n},k}^- \mathbf{M}(\mathbf{R}_{\mathbf{n},k}^-) + \mathbf{A}'_{\mathbf{n}'}(\mathbf{U}'_h) - \alpha'_k \lambda_{\mathbf{n}',k}^{-'} \mathbf{M}'(\mathbf{R}_{\mathbf{n}',k}^{-'}) = \mathbf{0} \quad (91)$$

According to the definition of $\mathbf{A}_{\mathbf{n}}$ (13) and the eigenmodes (16), we obtain the following equations by considering separately $\boldsymbol{\wp}_{vect}(\text{Eq.}(91))$ and $\boldsymbol{\wp}_{tens}(\text{Eq.}(91))$:

$$(\mathbf{C} : \boldsymbol{\varepsilon}_h) \cdot \mathbf{n} + (\mathbf{C}' : \boldsymbol{\varepsilon}'_h) \cdot \mathbf{n}' = - \sum_l \alpha_l z_{\mathbf{n},l}^- \frac{\gamma_{\mathbf{n},l}}{\sqrt{2}} - \sum_l \alpha'_l z_{\mathbf{n}',l}^{-'} \frac{\gamma'_{\mathbf{n}',l}}{\sqrt{2}} \quad (92a)$$

$$\mathbf{v}_h - \mathbf{v}'_h = \sum_l \alpha_l \frac{\gamma_{\mathbf{n},l}}{\sqrt{2}} - \sum_l \alpha'_l \frac{\gamma'_{\mathbf{n}',l}}{\sqrt{2}} \quad (92b)$$

As for (88b), the fact that $\mathbf{w} \otimes_s \mathbf{n} = \mathbf{0}$ implies $\mathbf{w} = \mathbf{0}$ is used to obtain (92b).

It is interesting to remark that (92) is identical to (88) if we change $\mathbf{C} : \boldsymbol{\varepsilon}_h$ with

$\boldsymbol{\sigma}_h$.

Then, to obtain the expressions given in Theorem 4.1, the following manipulations of (92) are made:

- For the first three equations corresponding to $\{\alpha_k\}$

$\frac{\overline{z_{\mathbf{n},k}}}{z_{\mathbf{n},k}} \frac{\gamma_{\mathbf{n},k}}{\sqrt{2}} \cdot (-\frac{1}{z_{\mathbf{n}',k}} \text{Eq.}(92a) + \text{Eq.}(92b))$ leads to:

$$\mathbf{M}(\mathbf{L}_{\mathbf{n},k}^-) \cdot (\mathbf{U}_h - \mathbf{U}'_h) = \alpha_k - \frac{1}{2} \sum_{l \neq k} \left(\frac{\overline{z_{\mathbf{n},k}}}{z_{\mathbf{n},k}} \frac{\delta z_{\mathbf{n}',kl}}{z_{\mathbf{n}',k}} \gamma_{\mathbf{n},k} \cdot \gamma'_{\mathbf{n}',l} \right) \alpha'_l \quad (93)$$

903 • For the last three equations corresponding to $\{\alpha'_k\}$
 904 $\frac{\overline{z_{\mathbf{n},k}}^R}{z_{\mathbf{n}',k}} \frac{\gamma'_{\mathbf{n}',k}}{\sqrt{2}} \cdot (-\frac{1}{z_{\mathbf{n},k}} \text{Eq. (92a)} + \text{Eq. (92b)})$ leads to:

$$M'(\mathbf{L}_{\mathbf{n}',k}^{-'}) \cdot (\mathbf{U}'_h - \mathbf{U}_h) = \alpha'_k - \frac{1}{2} \sum_{l \neq k} \left(\frac{\overline{z_{\mathbf{n},k}}^R}{z_{\mathbf{n}',k}} \frac{\delta z_{\mathbf{n},kl}^-}{z_{\mathbf{n},k}} \gamma'_{\mathbf{n}',k} \cdot \gamma_{\mathbf{n},l} \right) \alpha_l \quad (94)$$

905 The matrix form of (93) and (94) gives rise to (65). □