



An Interactive Game Theory-PSO Based Comprehensive Framework for Autonomous Vehicle Decision Making and Trajectory Planning

Nouhed Naidja, Stéphane Font, Marc Revilloud, Guillaume Sandou

► To cite this version:

Nouhed Naidja, Stéphane Font, Marc Revilloud, Guillaume Sandou. An Interactive Game Theory-PSO Based Comprehensive Framework for Autonomous Vehicle Decision Making and Trajectory Planning. 22nd World Congress of the International Federation of Automatic Control (IFAC 2023), International Federation of Automatic Control, Jul 2023, Yokohama, Japan. hal-04102621

HAL Id: hal-04102621

<https://centralesupelec.hal.science/hal-04102621>

Submitted on 7 Apr 2024

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

An Interactive Game Theory-PSO Based Comprehensive Framework for Autonomous Vehicle Decision Making and Trajectory Planning

Nouhed Naidja ^{*,**} Stéphane Font ^{*} Marc Revilloud ^{***}
Guillaume Sandou ^{*}

^{*} CentraleSupélec, Laboratoire des signaux et systèmes (L2S),
(nouhed.aidja@centralesupelec.fr) (stephane.font@centralesupelec.fr)
(guillaume.sandou@centralesupelec.fr).

^{**} Institut VEDECOM, (nouhed.aidja@vedecom.fr)

^{***} (marc.revilloud@dotflow.fr)

Abstract:

The mutual dependence between autonomous vehicles and human drivers is an open problem for the safety and feasibility of autonomous driving. This paper introduces a game-theoretic trajectory planner and decision-maker for mixed-traffic environments. Our solution accounts for interaction with the surrounding vehicles while making decisions, and uses a clothoid interpolation method to generate human-like trajectories. The Particle Swarm Optimizer (PSO) used here bridges the decision-making and the trajectory generating processes for a joined execution. We chose an unsignalized intersection crossing scenarios to demonstrate the feasibility of our method. Testing results show that our approach reduces the dimension of the search space for the trajectory optimization problem and enforces geometric constraints on path curvature.

Keywords: Decision Making, Game Theory, Trajectory optimization, Particle Swarm Optimization.

1 INTRODUCTION

Among the main challenges that have emerged from autonomous driving, considering interactions with human drivers in a mixed traffic flow is of great importance [Jafary et al. (2018)]. However, the cohabitation between autonomous and human-driven vehicles might create complex interactions. Thus, the behavior of Autonomous Vehicles (AVs) must be understood by other traffic participants, as each agent's action is dependent and influenced by other participants' decisions [Olaverri-Monreal (2020)]. Based on the outputs from the decision-making systems, the motion planner determines a goal trajectory that the vehicle executes and, in turn, influences the evolution of the road scene. This makes us aware that, decision-making and trajectory generation are highly coupled and thus, require a joined execution.

Under this background, our work mainly focuses on modeling mixed traffic interactions between human-driven and autonomous vehicles, when an autonomous car behaves approximately like a human-driven one.

The outline of our paper is as follows. Section 1 starts with an introduction and a brief state-of-the-art. In section 2, we first present a human-like clothoid-based model to depict vehicles' trajectories. Next, we detail the proposed decision-making process, aiming to capture the social nature of strategic interactions via a game theoretic-based approach. Then, we devised a unified decision-making and route-planning framework, where the decision-maker evaluates trajectory feasibility and the trajec-

tory prompts the last token decision to update. The validation of the proposed model and case study simulation results are presented in section 3. Finally, some concluding remarks are given in Section 4.

1.1 RELATED WORK

Autonomous vehicle trajectory design: Curve interpolation techniques such as cubic splines, Bezier curves, and clothoids are frequently used for AV's trajectory modeling due to their intrinsic smoothness and parameterization through control points [González et al. (2015)]. In our work, we are interested in the last category, clothoids, also known as Euler curves. Clothoids are parametric curves whose curvature varies linearly to the arc length. This property counteracts curvature discontinuity, which prevents the undesirable jerk and allows smooth curvature transitions from straight to circular lines or vice versa [Lambert et al. (2019)]. Clothoid curves are already used by road network design standards. Therefore, the non-holonomic behavior is structurally taken into account in clothoid-based trajectory. Several studies explore the construction of clothoids for trajectory generation. For example, [Funke and Christian Gerdes (2016)] addresses the problem of path curvature jumps during lane-changing maneuvers via a path composed of clothoids. Furthermore, a roundabout path planner based on clothoid curves has been developed in [Silva and Grassi (2018)] to ensure passenger comfort through curvature continuity. Nevertheless, in these two studies, the authors focus on zero heading and zero curvature. In their study, [Alhajjaseen et al. (2013)] showed that turning trajectories can be approximated as a combination of clothoids, circular arcs, and straight lines.

^{*} The authors acknowledge the infrastructure and support of the PELOPS unit of the Vedecom institute.

The player $\mathbf{v}$ aims to solve the following optimization problem:

$$\underset{s^v \in \mathcal{S}_v}{\text{minimize}} \quad J^v(s^v, s^o) \quad \text{s.t.} \quad s^v, s^o \in \mathcal{S}^{game}(\mathcal{S}_v, \mathcal{S}_o) \quad (5)$$

The player O 's objective function J^o and its optimization problem are formulated similarly. Both players behave rationally in order to reach an equilibrium, following the "best answer" principle currently used in game theory. The equilibrium $(s^{*,v}, s^{*,o}) \in \mathcal{S}^{game}$ solves this problem respecting equation (6).

$$\forall s^v, \forall s^o \quad \begin{cases} J^v(s^{v*}, s^{o*}) \leq J^v(s^v, s^{o*}) \\ J^o(s^{v*}, s^{o*}) \leq J^o(s^{v*}, s^o) \end{cases} \quad (6)$$

We define a Generalized Nash Equilibrium problem for a two-player game as follows:

$$f(s^v, s^o) = \max \left\{ \sup_{\bar{s}^v \in \mathcal{S}_v} \{J^v(s^v, s^o) - J^v(\bar{s}^v, s^o), 0\} \right\} + \max \left\{ \sup_{\bar{s}^o \in \mathcal{S}_o} \{J^o(s^v, s^o) - J^o(s^v, \bar{s}^o), 0\} \right\} \quad (7)$$

In this work, a player strategy $s_i^v \in \mathcal{S}_v$, and $s_j^o \in \mathcal{S}_o$ encodes optimal knots $s_i^v = \mathbb{P}_i^v \in \mathbb{R}^4$, and $s_j^o = \mathbb{P}_j^o \in \mathbb{R}^4$, respectively, that will be interpolated following equation (1).

Players payoff design: The aggregation of cost indicators associated with player p 's trajectory $\mathcal{T}_p$, determine its payoff function $J^p(s^v, s^o)$.

- **Efficiency Awareness:** The AV is incited to closely match the speed limit as follows:

$$I_{(s^v)}^{eff} = \frac{|V_{max} - \bar{v}(s^v)|}{V_{max}} \quad (8)$$

where $\bar{v}(s^v)$ is the mean speed of a player executing a strategy s^v and V_{max} is the higher speed limit in the intersection.

- **Safety Enhancement:** Each trajectory is enclosed within an Oriented Bounding Box (**B**) representing the shape of the vehicle. We also define a safety measure based on the gap separating the two bounding boxes from a potential collision, noted Gap To Collide (**GTC**) as stated below:

$$I_{(s^v, s^o)}^{safe} = \min_{t_{min} < t < t_{max}} e^{-\left(\frac{GTC(t)}{G_{crit}}\right)} \quad (9)$$

$[t_{min}, t_{max}]$ is the interaction time span. G_{crit} is a critical threshold that ought to be permanently maintained between vehicles.

Constraints: Collision avoidance constraints are expressed in terms of an adaptive elliptic safety zone ψ as follows:

$$\forall t \in [t_{min}, t_{max}], \quad \psi(t) \cap B^o(t) = \emptyset \quad (10)$$

B^o is the bounding box representing the opponent vehicle.

To handle this constraint, we check that equation(10) is verified for each vertex $v_j^o(x_j^o, y_j^o) \in B^o$, $\forall j \in \{1, \dots, 4\}$ following:

$$\frac{\left[\cos(\theta) \cdot (x_j^o - x) + \sin(\theta) \cdot (y_j^o - y) \right]^2}{d_{maj}(s^v)^2} + \frac{\left[\sin(\theta) \cdot (x_j^o - x) - \cos(\theta) \cdot (y_j^o - y) \right]^2}{d_{min}^2} > 1 \quad (11)$$

With (x, y) , and θ are, respectively, the center coordinates and the orientation of the ellipse, which evolves according to $d_{maj}(s^v)$ and d_{min} , the major and minor elliptic semi-axes as follows:

$$d_{maj}(s^v) = \frac{1}{2}L_v + TTC \cdot v(s^v), \quad d_{min} = \frac{1}{2}l_w + d_{safe} \quad (12)$$

Where: $v(s^v)$ is the speed while executing strategy s^v . **TTC** is the time left before the collision. L_v and l_w are, respectively, the vehicle's length and wheelbase, d_{safe} represents a minimum lateral safety distance parameter.

Objective function formulation: The player's objective function incorporates both safety and efficiency features.

$$h(s^v, s^o) = \omega_1 \cdot I_{(s^v, s^o)}^{safe} + \omega_2 \cdot I_{(s^v)}^{eff}, \quad 0 \leq \omega_i \leq 1 \quad (13)$$

This function is constrained by non-linear constraints related to the left-turning maneuver on the one hand, and the opponent's vehicle strategies on the other. The optimization problem a player must solve is the following:

$$\min_{s^v, s^o} \quad h(s^v, s^o), \quad \text{s.t.} \quad C(s^v, s^o) \leq 0, \quad (14)$$

Where $C(s^v, s^{oth})$ summarized the constraints expressed in equation (11).

2.3 Particle Swarm Optimization: A game-solving approach

Exhaustive exploration of all possible combinations in a search space is computationally intensive and time-consuming. Consequently, the optimization process requires sophisticated algorithms such as heuristic methods, and meta-heuristic algorithms, to attain satisfactory optimization results. Particle Swarm Optimization (PSO) is a meta-heuristic algorithm that mimics the collective swarm behavior. Recently, extensive applications of PSO can be found in the context of mobile robot's navigation Abdallaoui et al. (2022). In PSO, each random particle p represents a potential solution, has a fitness function $f(u)$ and searches for optima by adapting its position through its individual experience and knowledge exchange with neighboring particles. Given a P -particle swarm, exploring in a D-dimensional search space, the notations are:

- $X_p^k = (x_{p,1}^k, \dots, x_{p,D}^k)$, $V_p^k = (v_{p,1}^k, \dots, v_{p,D}^k)$: position and respectively velocity of particle p at the k^{th} iteration.
- $p_{best}^k = \arg \min_{1 \leq i \leq k} f(X_p^i)$: best solution founded by particle p until the k^{th} iteration.
- $g_{best}^k = \arg \min_{\substack{1 \leq i \leq k \\ 1 \leq j \leq P}} f(X_j^i)$: best solution founded by the entire swarm P until the k^{th} iteration.

The update of each particle's velocity and position from generation k to $k+1$ is governed by the following:

$$\begin{cases} v_p^{k+1} = \omega \cdot v_p^k + c_1 \cdot r_1 \cdot (p_{best}^k - X_p^k) + c_2 \cdot r_2 \cdot (g_{best}^k - X_p^k) \\ X_p^{k+1} = X_p^k + v_p^{k+1} \end{cases} \quad (17)$$

Here, the inertia weight ω governs the influence of the velocity. c_1 and c_2 represent cognition and social learning factors respectively Gou et al. (2017). The terms r_1 and r_2 correspond to random numbers uniformly generated in the range of $[0, 1]$.

In our research, each particle is a potential combination of both players strategies $(\mathcal{S}_v, \mathcal{S}_o)$, that explores the joined space $\mathcal{S}^{game}(\mathcal{S}_v, \mathcal{S}_o)$. Thus, the PSO-based algorithm is used to reach the Nash Equilibrium described in equation (7).

3 SIMULATION RESULTS

We validate our algorithm and demonstrate the performance of the proposed approach on two traffic scenarios commonly encountered in intersection crossing.

Particle Swarm Optimizer Performance

The convergence of the proposed PSO-based solver is depicted in the figures (2) and (3). From analyzing the best fitness value $\mathbf{g}_{\text{best}}$ found over all the particles, we can see that Generalized Nash equilibrium can be obtained in less than 40 iterations in both scenarios. As iteration grows, the particles find a strategic combination (s^{v*}, s^{o*}) solving the two-player game in equation (7). Besides, we can see that the global best solution founded by the best particle in figure (2), converges faster and more smoothly than the average objective $\bar{C}^k = \frac{1}{P} \sum_{j=1}^P f(X_j^k)$ illustrated in figures (3). This indicates that we can avoid falling into a local optimum during the search process. From the above results, the proposed PSO-based solver is appropriate for finding Generalized Nash Equilibrium.

Scenario 1: This scenario is illustrated in the figure (4). We observe that both the autonomous vehicle and the human drivers proceed to cross the intersection concurrently. This synchronized action is based on their mutual anticipation that each of them will select a trajectory deemed safe. The Ego vehicle chose to proceed first at the intersection. The ego and the opponent vehicles successfully avoided collision and reached their target destinations.

Scenario 2: In the second case, presented in figure (5), the ego vehicle chose to cede the priority to the opponent vehicle, as it predicted that the conflict zone would not be cleared in time. This decision reflects the inability of ego vehicle to identify a feasible trajectory that avoids a potential collision with the trajectory being executed by its opponent, who would join the intersection ahead. Therefore, Ego vehicle's optimal response is to stop, ensuring that the opponent vehicle safely traverses the intersection.

4 CONCLUSIONS

This paper presents a comprehensive game theoretic approach for decision-making and trajectory optimization for autonomous vehicles. the primary goal of our study is to enhance interaction between autonomous and human-driven vehicles in mixed traffic scenario. We present a framework that allows autonomous vehicles to make decisions based on human drivers expectations and to analyze their decisions. We used a solver based on Particle Swarm Optimization to find Generalized Nash Equilibrium and optimize trajectories that satisfy the required safety constraints, while maintaining human-like behavior. The proposed approach underwent validations and showed its effectiveness, allowing AVs to maneuver through challenging driving situations and to effectively interact with other vehicles.

References

- Abdallaoui, S., Aglzim, E.H., Chaibet, A., and Kribèche, A. (2022). Thorough review analysis of safe control of autonomous vehicles: path planning and navigation techniques. *Energies*, 15(4), 1358.
- Abdeljaber, O., Younis, A., and Alhajyaseen, W. (2020). Extraction of vehicle turning trajectories at signalized intersec-

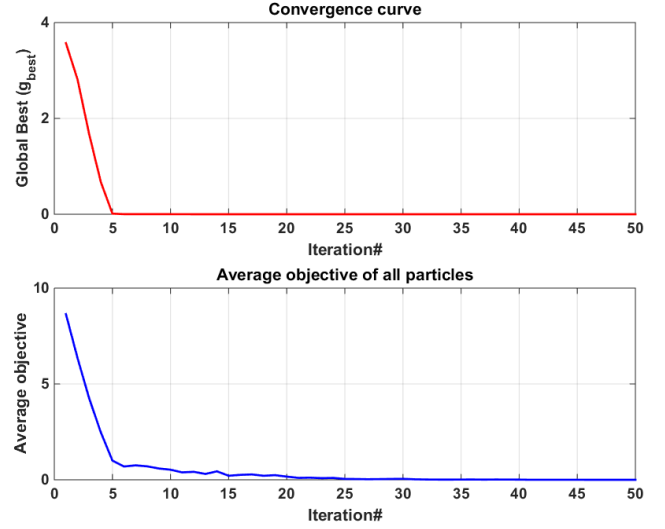


Fig. 2. Scenario 1: Convergence graph of PSO

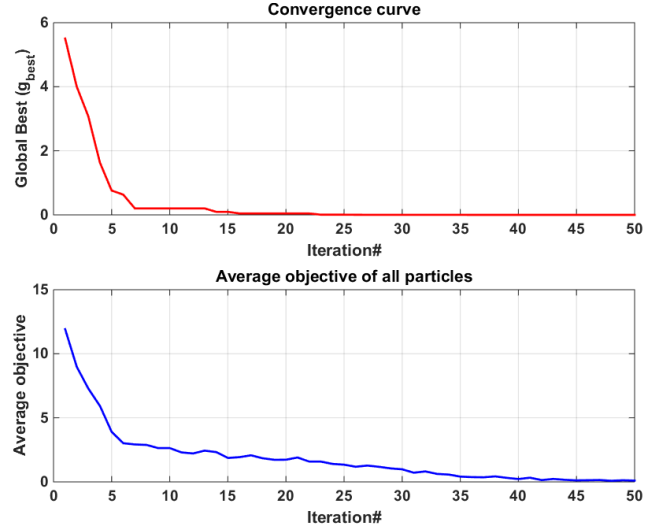


Fig. 3. Scenario 2: Convergence graph of PSO

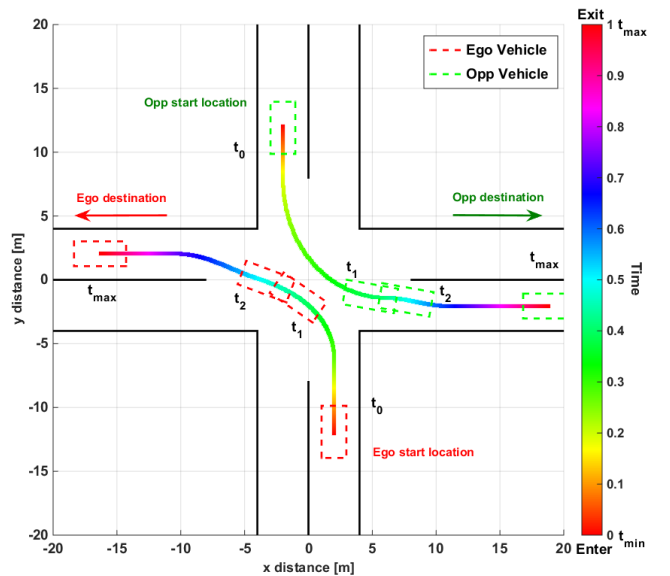


Fig. 4. Scenario 1: Ego vehicle and its Opponent (Opp) crossing the intersection

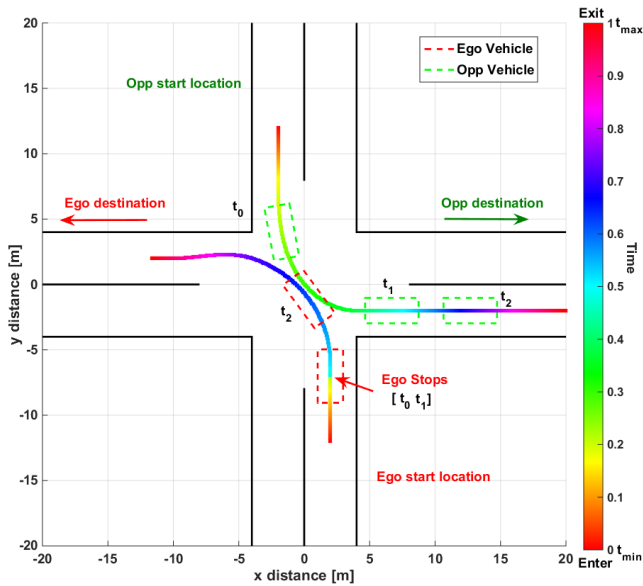


Fig. 5. Scenario 2: Ego vehicle stops and the Opponent (Opp) crosses first

- tions using convolutional neural networks. *Arabian Journal for Science and Engineering*, 45(10).
- Alhajyaseen, W.K., Asano, M., Nakamura, H., and Tan, D.M. (2013). Stochastic approach for modeling the effects of intersection geometry on turning vehicle paths. *Transportation Research Part C: Emerging Technologies*, 32.
- Bertolazzi, E. and Frego, M. (2018). On the g2 hermite interpolation problem with clothoids. *Journal of Computational and Applied Mathematics*, 341, 99–116.
- Cleac'h, L., Schwager, M., Manchester, Z., et al. (2022). Algames: a fast augmented lagrangian solver for constrained dynamic games. *Autonomous Robots*, 46(1).
- Facchinei, F. and Kanzow, C. (2010). Generalized nash equilibrium problems. *Annals of Operations Research*, 175(1).
- Funke, J. and Christian Gerdes, J. (2016). Simple clothoid lane change trajectories for automated vehicles incorporating friction constraints. *Journal of Dynamic Systems, Measurement, and Control*, 138(2), 021002.
- González, D., Pérez, J., Milanés, V., and Nashashibi, F. (2015). A review of motion planning techniques for automated vehicles. *IEEE Transactions on intelligent transportation systems*, 17(4).
- Gou, J., Lei, Y.X., Guo, W.P., Wang, C., Cai, Y.Q., and Luo, W. (2017). A novel improved particle swarm optimization algorithm based on individual difference evolution. *Applied Soft Computing*, 57, 468–481.
- Jafary, B., Rabiei, E., Diaconeasa, M.A., Masoomi, H., Fiondella, L., and Mosleh, A. (2018). A survey on autonomous vehicles interactions with human and other vehicles. In *14th PSAM International Conference on Probabilistic Safety Assessment and Management*.
- Lambert, E., Romano, R., and Watling, D. (2019). Optimal path planning with clothoid curves for passenger comfort. In *Proceedings of the 5th International Conference on Vehicle Technology and Intelligent Transport Systems (VEHITS 2019)*, volume 1. SciTePress.
- Mandiau, R., Champion, A., Auberlet, J.M., Espié, S., and Kolski, C. (2008). Behaviour based on decision matrices for a coordination between agents in a urban traffic simulation. *Applied Intelligence*, 28(2).

- Olaverri-Monreal, C. (2020). Promoting trust in self-driving vehicles. *Nature Electronics*, 3(6), 292–294.
- Silva, J.A. and Grassi, V. (2018). Clothoid-based global path planning for autonomous vehicles in urban scenarios. In *2018 IEEE International Conference on Robotics and Automation (ICRA)*, 4312–4318. IEEE.
- Tian, R., Li, S., Li, N., Kolmanovsky, I., Girard, A., and Yildiz, Y. (2018). Adaptive game-theoretic decision making for autonomous vehicle control at roundabouts. In *2018 IEEE Conference on Decision and Control (CDC)*, 321–326. IEEE.
- Zhang, H., Su, Y., Peng, L., and Yao, D. (2010). A review of game theory applications in transportation analysis. In *2010 international conference on computer and information application*, 152–157.